

F5-Networks

Exam Questions 101

Application Delivery Fundamentals



NEW QUESTION 1

TI SISSL prides which functionary when a web browser connects to web site using the HTTPS protocol?

- A. delivers secure communication over a network connection
- B. prevents the web server from being compromised
- C. protects network packets from interception by intermediaries
- D. stop the web browser from automatically downloading malware

Answer: A

NEW QUESTION 2

A client receives all of the expected data from a server and sends a FIN packet signaling the end of communication. What will the server do when it receives the FIN Packet from the client?

- A. send a SYN packet
- B. send an RST packet
- C. Send both FIN and RST packets
- D. send an ACK Packet

Answer: D

Explanation:

<https://www.geeksforgeeks.org/computer-networ-tcp-connection-termination/>

NEW QUESTION 3

A load balancing decision needs to be made based on custom a What is the most appropriate F5 feature (or this purpose?

- A. iApps
- B. Scale
- C. iControl
- D. iRules

Answer: D


NEW QUESTION 4

What describes the third "A" in the common authentication acronym AAA?

- A. provides redundancy
- B. measures usage against an identity
- C. provides user filtered access
- D. ensures the correct identity

Answer: C

NEW QUESTION 5

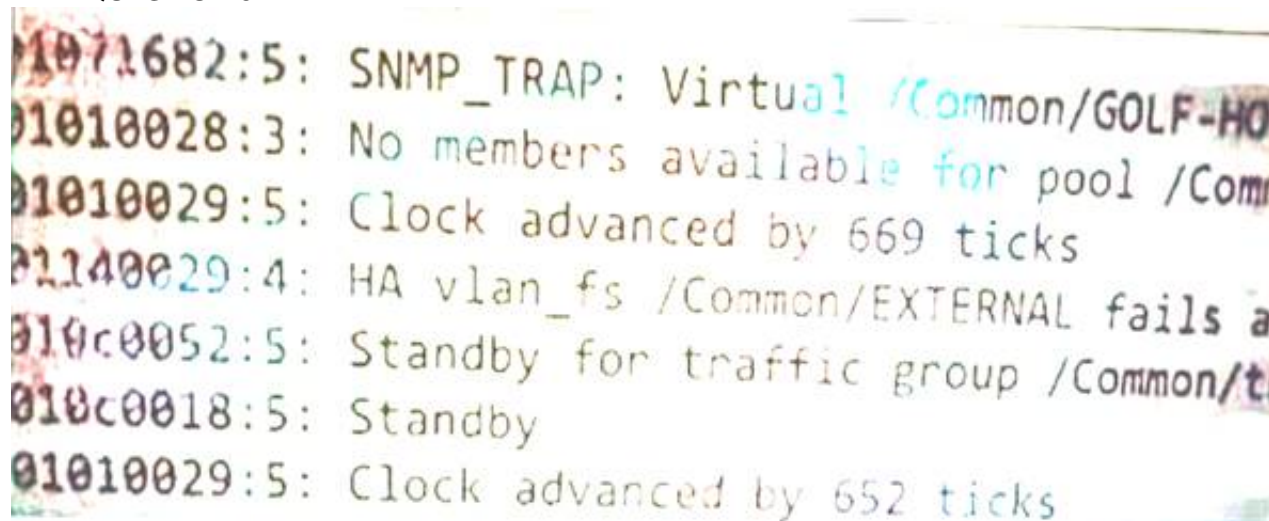


```

1071682:5: SNMP_TRAP: Virtual /Common/GOLF-HO
01010028:3: No members available for pool /Comm
01010029:5: Clock advanced by 669 ticks
01140029:4: HA vlan_fs /Common/EXTERNAL fails a
010c0052:5: Standby for traffic group /Common/t
010c0018:5: Standby
01010029:5: Clock advanced by 652 ticks
  
```

A)



B)



C)



A. Option

- B. Option
- C. Option

Answer: A

NEW QUESTION 6

What are the two primary functions of the OSI 7 layer model (Choose two)

- A. to guide interoperability between products made by different vendors
- B. to define protocol behavior
- C. to group communications into logical layers
- D. to define specifications of host-to-host communications
- E. to standardize HTTP communications between different vendors

Answer: AB

NEW QUESTION 7

What does the HTTP status code 404 mean?

- A. Not Acceptable
- B. Forbidden
- C. Request Timeout
- D. Not found

Answer: D

NEW QUESTION 8

An administrator sets up a web server for a new web application. The administrator cannot access the web server at is causing this issue?



- A. The HTTP service only listens on localhost
- B. The users IP needs to be allowed to access
- C. The server needs to be restarted
- D. The HTTPS service is not running

Answer: A

NEW QUESTION 9

Client traffic for a web application is managed by load balancers in a high availability configuration. After a failover event all clients are forced to login again to the application.

What is the most likely reason this occurred?

- A. Clients were sending request to failed load balancer
- B. connection mirroring configuration was NOT configured on the load balancer
- C. The server was responding to the failed load balancer
- D. SSL offloading was NOT configured on the load balancer

Answer: B

NEW QUESTION 10

The administrator wants client request to be directed to the same pool member through the session based on the client IP address. Which persistence method should the administrator choose?

- A. SSL persistence
- B. destination address affinity persistence
- C. cookie persistence
- D. Source address affinity persistence

Answer: D

NEW QUESTION 10

Which OSI layer provides reliable transmission of frames between adjacent nodes and is built on top of the provides reliable transmission of frames adjacent nodes and is built on top of the Physical layer?

- A. Data link
- B. Transport

- C. Network
- D. Application

Answer: A

NEW QUESTION 11

Which high availability feature allows two different BIG-IP devices to use the MAC address for the same server IP?

- A. HSRP virtual MAC address
- B. Device group
- C. Sync- failover
- D. MAC masquerade

Answer: D

NEW QUESTION 13

A BIG-IP Administrator is trying to send traffic to a server on the same subnet and sees an incomplete in the BIG-IP devices ARP table. What could cause the incomplete status?

- A. BIG-IP device connection is half-duplex
- B. Router does not have a default gateway
- C. Firewall is blocking ICMP
- D. Server's switch connection is in the wrong VLAN

Answer: D

NEW QUESTION 14

What are two examples of failover capabilities of BIG-IP? (Choose two)

- A. failing over based on an over temperature alarm
- B. failing over serial cable based on electric failure code
- C. II failing over network connection based on heartbeat detection
- D. fading over network connection based on SNMP error
- E. failing over serial cable based on voltage detection

Answer: CE

NEW QUESTION 17

Which HTTP response code is returned when a web server requires authentication to access a resource?

- A. 500
- B. 401
- C. 302
- D. 100

Answer: B

NEW QUESTION 21

Which type of certificate is pre-installed in a web browser's trusted store?

- A. Root Certificate
- B. Server Certificate
- C. Client Certificate
- D. intermediate Certificate

Answer: A

NEW QUESTION 23

Which function does the Presentation Layer provide?

- A. translation and encryption
- B. transmission over a medium
- C. internetworking capabilities
- D. access to available resources

Answer: A

NEW QUESTION 24

An administrator takes a capture of five Traffic using tcpdump. The administrator notices that different ephemeral port numbers are architecture does this indicate?

- A. packet-based architecture
- B. full proxy architecture
- C. hub and spoke architecture
- D. ring network architecture

Answer: B

NEW QUESTION 29

An administrator needs to create a structured application delivery configuration that will prevent individual objects from being modified directly. Which F5 technology should the administrator use?

- A. iRules
- B. iApps
- C. iSessions
- D. iContfol

Answer: B

NEW QUESTION 31

In which scenario is a full proxy TCP connection required?

- A. TCP routing
- B. IPv4 to IPv6 gateway
- C. UDP routing
- D. UDP to ICMP gateway

Answer: B

NEW QUESTION 32

A BIG-IP Administrator needs to upgrade an HA pair to a more recent TMOS version. The administrator is unsure if the BIG-IP is currently supported. How should the administrator verify that the HA pair is under a valid support contract?

- A. confirm that "License OK" is set to yes in the applied license
- B. confirm that the "Service Check Date" specified in the applied license has not passed
- C. Check the status of the license under the Platform menu of the F5 Configuration Utility
- D. review /var/log/license for messages that indicate an expired license

Answer: C

NEW QUESTION 37

What is a primary reason to choose hardware over virtual devices?

- A. failure isolation
- B. HA capabilities
- C. management capabilities
- D. SSL performance

Answer: D

NEW QUESTION 42

A new VLAN segment has been added to the network. Only the existing connected interface may be used. What should the BIG-IP Administrator do to allow traffic to both the existing and the new VLAN?

- A. configure VLAN with Link Aggregation Control Protocols (LACP)
- B. configure a tagged VLAN
- C. configure an untagged VLAN
- D. configure VLAN to use interface with Multiple Spanning Tree Protocol (MSTP)

Answer: B

NEW QUESTION 43

A BIG-IP virtual Server with an IP address of 10.100.43.108 must be available to public internet users. Which technology should be used to achieve this task?

- A. NDP
- B. DNS
- C. NAT
- D. ARP

Answer: C

Explanation:

10.x.x.x/8 is an RFC 1918 reserved private IP address. It must be NATted from a publicly accessible IP for access from the internet.

NEW QUESTION 47

Which version of SNMP can AuthPriv be used?

- A. 2
- B. 3
- C. 2c
- D. 3c

Answer: B

NEW QUESTION 49

A BIG-IP Administrator needs to configure a MAC masquerade address for traffic-group 1. Where on the GUI should this configuration be performed?

- A. System > Configuration Device General > traffic-group-1
- B. Local Traffic > Traffic Class > traffic-group-1
- C. Device Management > Traffic Groups > traffic-group-1
- D. Network > ARP Static List > traffic-group-1

Answer: C

NEW QUESTION 53

10:20: 37 .00749:IP 199.16.255.254.36664>10.0.1.10 http : flags (s) seq 700424862, Win 29200

A website is fronted by a load balancer that implements a full proxy architecture with SNAT enabled. Behind the load balancer, there are two nodes: Node 1 and node2.

The administrator is debugging an issue on node 1 using icpdump and records the above output about a received packet. On which device does the IP address 192.168.265.254 belong?

- A. node2
- B. node 1
- C. load balancer
- D. web Client

Answer: C

NEW QUESTION 56

When using LDAP for authentication, what is the purpose of the base DN?

- A. the search context starting point
- B. the directory's simple name
- C. the base attribute in an LDAP directory
- D. the fundamental naming convention

Answer: A

NEW QUESTION 57

Which protocol data unit (PDU) is associated with the OSI model Network layer?

- A. Frame
- B. Packet
- C. Segment
- D. Bit

Answer: B

Explanation:

https://en.wikipedia.org/wiki/Protocol_data_unit

NEW QUESTION 62

An administrator configures a default gateway for the host. What is the purpose of a default gateway?

- A. to replace the destination IP address with the default gateway
- B. to pass all traffic to the default gateway
- C. to forward packets to remote networks
- D. to populate the ARP table

Answer: C

NEW QUESTION 67

In which FTP mode is the server, responsible for initiating the data connection back to the client?

- A. Protected FTP
- B. Active FTP
- C. Secure FTP
- D. Passive FTP

Answer: B

Explanation:

<https://support.f5.com/csp/article/K08859735>

NEW QUESTION 70

A new web server VLAN has been created and the IP address 10.1.1.1/24 has been assigned to the BIG-IP device. The BIG-IP Administrator needs to create the new Self IP and prevent administrator access to the BIG-IP device from the newly created network.

Which TMSH command should be used?

- A. create /net self internal address 10 1.1. 1/24 vlan VLAN 10 allow service none.
- B. add 'net self internal address 10.1.1. 1/24 vlan VLAN 10 allow-service none
- C. create /net self internal address 10. 1. 1. 1/24 vlan VLAN 10 allow service default
- D. add /net self internal address 10 111 mask 265. 255. 2550 vlan VLAN 10 allow

Answer: A

Explanation:

White the default differs from version to version, H typically allows HTTP SSH and iQuety for BIG-IP to BIG-IP communication

NEW QUESTION 71

An administrator needs to selectively compress HTTP traffic based on geographical location Which FS Feature should the administrator use?

- A. One Connect
- B. iRules
- C. SPDY profile
- D. iSessions

Answer: B

NEW QUESTION 75

An IPv4 client tries to access to http://www myserver com

Which type of DNS request should the client send to its configured DNS server?

- A. type NS
- B. type A
- C. type AAAA
- D. type MX

Answer: B

NEW QUESTION 76

A load balancer receives a TCP SYN packet from a client and immediately sends the packet on to a server. This is an example of which type of solution?

- A. packet forwarding architecture
- B. Full proxy architecture
- C. TCP compression
- D. TCP optimization

Answer: A

NEW QUESTION 77

Which protocol data unit (PDU) is associated with the OSI model's Transport layer?

- A. Segment
- B. Datagram
- C. Packet
- D. Bit

Answer: A

Explanation:

https://en.wikjpedia.org/wiki/Protocol_data_unit

NEW QUESTION 82

A company recentlyopened a new branch site. The site needs to access the internet through a link to HQ.Therouter at the branch Branch1 the router at HQ is Called core1. The computers at the branch site reside on the network 192 168 1 0/24 directly connected to Branch1 Users at HQ can already access the Internet.What routing must be configured to achieve the required internet connectivity for the branch site?

- A. a route for 0. 0. 0.0/0 on Branch1 to Core1, and a route for 192 168 1 0/24 from Core 1 to Branch1
- B. a route for 0. 0. 0.0/0 on Core 1 to Branch1. and a route (or 192 168 1.0/24 from Branch 1 to Core.
- C. only a route for 192 168 0 0724 from Core1 to Branch1
- D. only a route for 0. 0.0.0/0 on Branch1 to Core1

Answer: A

NEW QUESTION 87

A BIG-IP Administrator needs to create a route to send traffic destined to 10.1.1 1 to another router with an address of 192 168 1 1 Which TMSH command should the administrator use?

- A. create/net route 10. 11. 1/32 gw 192 168. 1. 1
- B. create met route 192 168. 1. 1/32 gw 10. 11. 1
- C. add met route 192. 168. 1. 1/32 gw 10. 1. 1. 1
- D. add inet route 10.11.1/32 gw 192. 168.1.1

Answer: A

NEW QUESTION 91

In an active/standby high-availability mode, what causes a standby unit to assume the active role?

- A. Hashed unit iD
- B. management MAC address
- C. resource utilization
- D. heartbeat detection


Answer: D

Explanation:

<https://supportf5.com/csP/article/K95002127>

NEW QUESTION 96

Which of the following would happen?

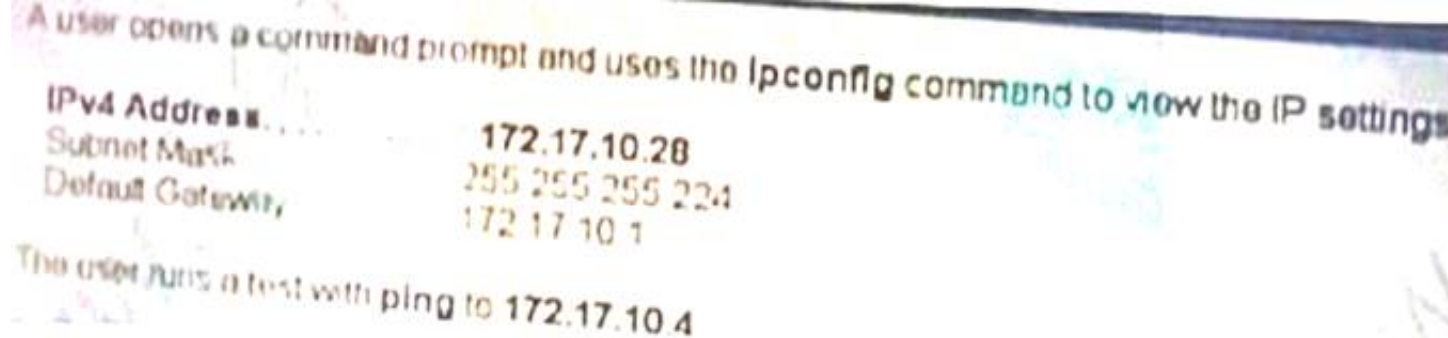

- A. The PC sends a DNS query for 172. 17. 10. 1
- B. The PC sends an ARP looking for the MAC address of 172. 17. 10. 4
- C. The PC sends an ARP looking for the MAC address of 172. 17. 10. 1
- D. The PC sends a DNS query for 172.17.10 4

Answer: B

NEW QUESTION 97

An Administrator enables HTTP keep alive. How does this affect the network?

- A. HTTP connections will remain open longer
- B. Fewer TCP connections will need to be opened
- C. HTTP connections will close when the keep-alive times out
- D. More TCP connections will need to be opened

Answer: B

Explanation:

[https //en wikipedia org/wiki/HTTPpersistentconnection](https://en.wikipedia.org/wiki/HTTPpersistentconnection)

NEW QUESTION 98

An administrator needs to do the following

- * install a load balancer in front of an existing application
- * test application performance
- * avoid reconfiguration of the application server
- * avoid interruption of users accessing the application

- A. modify the test client's local host file
- B. modify the DNS Server A-record for the application
- C. configure IP Anycasting
- D. configure Port Address Translation

Answer: A

NEW QUESTION 101

Which two protocol are used for the retrieval of email? (Choose two)

- A. ICAP
- B. SMTP
- C. IMAP
- D. POP3
- E. SNMP

Answer: CD

NEW QUESTION 105

An administrator encounter an error while working on eBiG.IP device and contacts F5 Support to open a case. While opening the case Support of the administrator that a BIO-IP version update is required.

Which F5 Support policy requires the administrator to upgrade the BIG-IP version.

- A. End of Software Support
- B. End of Support Contact Renewal
- C. End of Technical Support
- D. End of Return to Manufacturing

Answer: A

NEW QUESTION 108

ICMP is used by which command line tool?

- A. curt
- B. tcpdump
- C. traceroute
- D. nslookup

Answer: C

NEW QUESTION 113

A company deploys F5 load balancers to manage number of secure applications. The company needs to centrally manage certificates. Which F5 product provides this functionality?

- A. BIG IQ
- B. GTW
- C. iHeath
- D. LTM

Answer: A

NEW QUESTION 116


Which of the following is a valid IP address and prefix length?

- A. 192. 168.:0 177/25
- B. 192 168:0. 129/25
- C. 192.168:0 128/25
- D. 192 168 :0 255/25

Answer: B

NEW QUESTION 117

An administrator is having a connectivity issue with a server in the same network. Upon checking with the command arp -a on a Windows machine, the two outputs are taken on a 1 minute interval "hat is likely causing this issue?

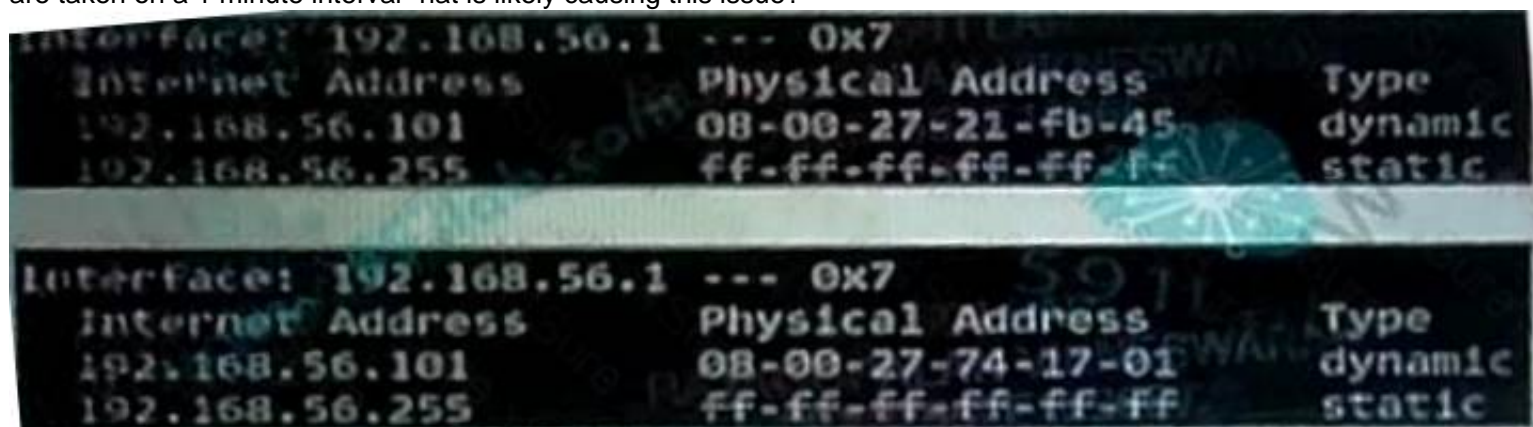

Interface: 192.168.56.1 --- 0x7	Internet Address	Physical Address	Type
	192.168.56.101	08-00-27-21-fb-45	dynamic
	192.168.56.255	ff-ff-ff-ff-ff-ff	static

Interface: 192.168.56.1 --- 0x7	Internet Address	Physical Address	Type
	192.168.56.101	08-00-27-74-17-01	dynamic
	192.168.56.255	ff-ff-ff-ff-ff-ff	static

- A. Interface down
- B. MAC address conflict
- C. No route available
- D. IP address conflict

Answer: D

NEW QUESTION 120


Which protocol emphasizes reduced latency over reliability?

- A. TCP
- B. UDP
- C. GRE
- D. RSVP

Answer: B

NEW QUESTION 124

An administrator configures secure remote access to a server's shell Given the netstal output, what did the administrator configure?

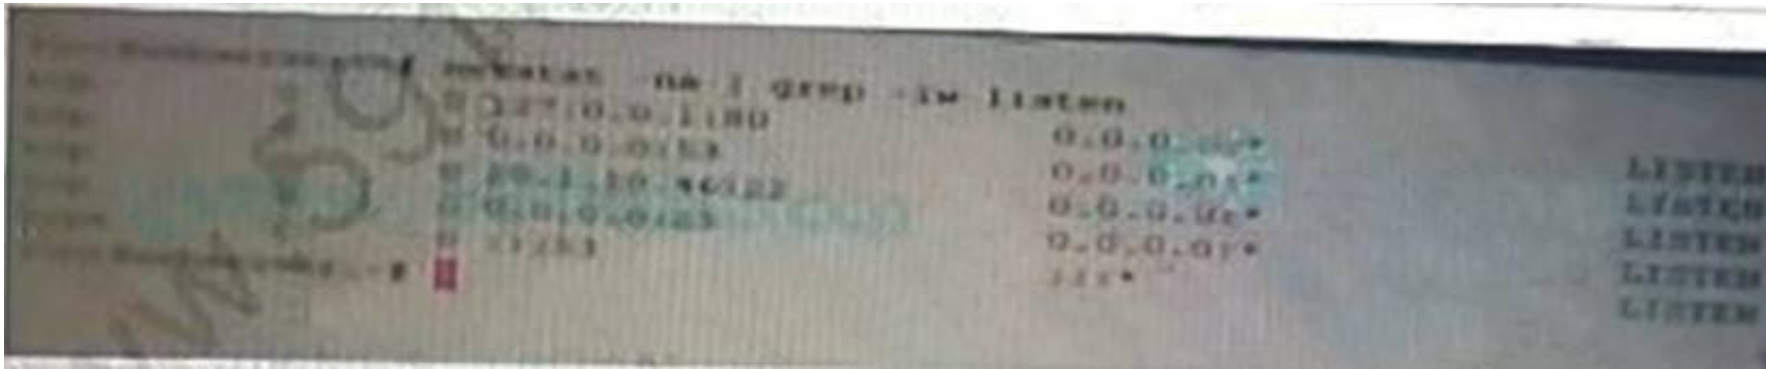

- A. telnet
- B. allowing connections only from IP address 10 .1. 10.46
- C. ssh
- D. listening on IP address 10. 1. 10.46
- E. ssh
- F. allowing connections only from IP address 10.1. 10. 46
- G. teinetd listening on IP address 10.1. 10. 46

Answer: B

Explanation:

Although it appears telnet is configured in this example (!) it is listening on all IP addresses of the system while ssh (port 22) is only on the 10.1.10.46 address.

NEW QUESTION 125

Which Datalink sublayer has the primary funcn of proving node lo node flow and error control?

- A. LLC
- B. ARP
- C. MAC
- D. UDP

Answer: A

Explanation:

https://en.wikipedia.org/wiki/Logical_link_control

NEW QUESTION 127

In the Network Map a red diamond appears next to the three member servers in the Virtual Server's pool. The nodes in the pool each show a green circle. What is the most likely reason for this scenario?

- A. The pool members health monitor has been disable
- B. The pool members have been disabled
- C. The pool members have been powered off
- D. The pool member services have been shut down

Answer: D

NEW QUESTION 128

A BIG-IP Administrator has a cluster of devices.

What should the administrator do after creating a new Virtual Server on device 1?

- A. synchronize the settings of device 1 to the group
- B. create a new cluster on device 1
- C. create the new virtual server on device 2
- D. synchronize the settings of the group to device 1

Answer: A

NEW QUESTION 129

A user is trying to access a website using the URL https://1.1.1.1/ The website fails to load. The user can access other websites. Given the packet capture above, what is the most likely issue?



- A. The remote server is not responding because it is down

- B. The client machine is not 'connected to the internet
- C. The client machine's DNS is configured incorrectly
- D. The remote server is actively rejecting the connection

Answer: D

NEW QUESTION 130

A BIG-IP Administrator needs to configure a network to separate traffic into three different VLANs using a single port on the BIG-IP device. What means should be used to allow this?

- A. LACP link aggregation
- B. Multiple MAC registration Protocol
- C. 0902 19 VLAN tagging
- D. Port Spanning

Answer: C

NEW QUESTION 133

HTTP pool attached to a Virtual Server has three members Pool member A default HTTP monitor in red Pool member 6 custom HTTP monitor in green Pool member C does not monitor

Which pool members participate in the load balancing?

- A. Pool members A and C
- B. Pool members A B and C
- C. Pool members B and C
- D. Pool members A and B

Answer: C

NEW QUESTION 135

An administrator needs to load balance connections to the application server with the lowest number of Which load balancing method meets these requirements?

- A. Least Sessions
- B. Ratio Least Connections (member)
- C. Least Connections (member)
- D. Least Connections (node)

Answer: D

Explanation:

<https://support.f5.com/csp/article/K9573>

NEW QUESTION 139

An IPV6 clients tries to connect to <http://myserver.com>

Wh.cn type of DNS request should the client send to its configured server?

- A. type MX
- B. type AAAA
- C. type NS
- D. type A

Answer: B

NEW QUESTION 143

An administrator is currently designing the IP addressing scheme for a small company. They have been asked to use the 192. 168. 100 x block of addresses with a /27 network prefix. How many networks and hosts per network will be available when using the 27-bit network prefix.

- A. 255 networks each with 224 hosts
- B. 30 networks each with 8 hosts
- C. 8 networks each with 30 hosts
- D. 27networks each with 30 hosts

Answer: C

NEW QUESTION 147

An administrator needs a data a format that is support authentication against an external security domain. The data format must format support SSO. Which data format should the administrator choose?

- A. AAA
- B. Kerberos
- C. SAML
- D. EAP

Answer: C

NEW QUESTION 150

A BIG IP administrator recently reset statistics for interfaces 1.1 and 1.2. The administrator notices that traffic appears on a data plane interface without receiving any client requests. All nodes and pools have monitoring enabled, and all routes are locally defined on the device. All management traffic is sent over the mgmt interface. What is the nature of this traffic?

- A. SNMP polling and traps
- B. Health checks for nodes and pool members
- C. Dynamic routing protocols
- D. TCP Keepalives for nodes and pool members

Answer: B

Explanation:

Health checks typically will be sent via the tmm interface based on the tmm routing configuration

NEW QUESTION 151

Which protocol data unit (PDU) is associated with the OSI model's Physical layer?

- A. Frame
- B. Datagram
- C. Segment
- D. Bit

Answer: D

Explanation:

https://en.wikipedia.org/wiki/Protocol_data_unit

NEW QUESTION 154

AD VLAN must be created with an 802.1Q tag of 705 on interface 11. What is the proper TSH command to create this new VLAN on the BIG-IP?

- A. Create net wan internal interfaces add {1 1 (tagged)} tag 706
- B. Create net vlan internal trunk add (11 {tagged})
- C. add /net vlan internal interfaces add (11) tag 705
- D. add / net vlan internal trunk add {1 1 (tagged)} tag 705

Answer: A

NEW QUESTION 156

A client is transmitting a large amount of data to a server. During this process, the server sets the window size to zero. What is the likely cause of this issue?

- A. The server is unable to accept more data
- B. The server resets the connection
- C. The client runs out of network buffers
- D. The server reaches its maximum segment size

Answer: A

Explanation:

<https://wiki.wireshark.org/TCP%20ZeroWindow>

NEW QUESTION 161

Which support service is required to synchronize the time stamps in system logs from these devices?

- A. SNMP
- B. Syslog
- C. SMTP
- D. DNS

Answer: B

NEW QUESTION 165

Which protocol could be used to provide AAA Accounting?

- A. Kerberos
- B. SAML
- C. DIAMETER
- D. LDAP

Answer: C

Explanation:

https://en.wikipedia.org/wiki/Diameter_protocol

NEW QUESTION 169

Layer 2 mapping information is announced by an interface without receiving a request for the mapping first. Which term describes this event?

- A. ICMP
- B. STP
- C. gratuitous ARP
- D. ARP

Answer: C

NEW QUESTION 170

Pool A has three members. Why is the pool up?



- A. Heaton monitoring is enabled on only one member
- B. One member has a successful health monitor
- C. Member status is determined by volume of traffic
- D. There is no health monitoring

Answer: B

NEW QUESTION 175

The BIG-IP device has the following configured routes:

Destination	Gateway
10.238.0.0/16	192.168.10.10
10.238.10.0/24	192.168.10.20
10.238.10.10/32	192.168.10.30
default	192.168.10.40

Which gateway will be chosen to send the packet to the destination 10.238.10.11?

- A. 192.168.10.20
- B. 192.168.10.40
- C. 192.168.10.30
- D. 192.168.10.10

Answer: A

NEW QUESTION 178

A BIG IP Administrator configures three Network Time Protocol servers to keep the time of the devices in sync. Which tool should the administrator use to show the synchronization status with the Network Time Protocol servers?

- A. time
- B. ntpdate
- C. date
- D. ntpq

Answer: D

Explanation:

ntpq -pn will show the synchronization status of configured ntp servers

NEW QUESTION 182

What is a primary benefit of employing a load balancer to manage traffic for an application?

- A. It reduces the number of client connections
- B. It provides a more uniform client experience
- C. It allows easy scaling up of the application
- D. It Reduces dropped connections

Answer: C

NEW QUESTION 186

What is a disadvantage of running a visualized load balancer

- A. more expensive than a hardware load balancer
- B. slower than a hardware load balancer
- C. less reliable than a hardware load balancer
- D. does not support high availability

Answer: B

NEW QUESTION 190

What are three functions commonly performed by HTTP cookies? (Choose three)

- A. Track users' browsing activities
- B. hold User preferences
- C. maintain session state
- D. execute client side scripts
- E. execute server side scripts

Answer: ABC

NEW QUESTION 193

A company is creating a new department for Security Engineering and needs to create a segregated network segment with only 24 IPS. What should be configured?

- A. configure a new VLAN and assign a netmask of /29
- B. use an existing VLAN and assign a netmask of /28
- C. use an existing VLAN and assign a netmask of /30
- D. configure a new VLAN and assign a netmask of /27

Answer: D

Explanation:

a /28 contains 14 usable IPs and a /27 contains 30 usable IPs

NEW QUESTION 196

A new virtual server is being tested to replace <http://myapp.mydomain.com>. The original virtual server is still on use. And the new virtual server is on a different ip address. What should be done to test this new virtual server using the fully qualified domain name for this application?

- A. add a DNS record for the fully qualified domain name
- B. add the fully qualified domain name to the browser cache
- C. make an entry in the client host file
- D. make an entry in the web server services file

Answer: C

NEW QUESTION 200

Which security mode. functions by defining what traffic is allowed and rejecting all other traffic?

- A. context-based access control mode!
- B. role-based access control mode!
- C. negative security model
- D. positive security model

Answer: D

NEW QUESTION 204

A server is capable of handling more connections than other servers in the same pool. Which load distribution method should the administrator choose?

- A. Least Connections
- B. Fastest
- C. Ratio
- D. Round Robin

Answer: C

NEW QUESTION 207

In which scenario is a packet forwarding architecture required?

- A. when HTTP header must be modified
- B. when cookie persistency is demanded
- C. when the server responds directly to the client
- D. when the number of TCP connections on the server should be reduced

Answer: C

NEW QUESTION 212


Web application <http://www.example.com> at 10.10.1.10 is unresponsive.

A recent change installed new firewalls in the network. Which command should be used to locate where data loss has occurred within the network?


A)




B)



C)



D)



- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

Explanation:

Traceroute attempts to send ICMP-packets that expire further down the network and determine if a network device is responding or allowing traffic through.

NEW QUESTION 216

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

101 Practice Exam Features:

- * 101 Questions and Answers Updated Frequently
- * 101 Practice Questions Verified by Expert Senior Certified Staff
- * 101 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 101 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 101 Practice Test Here](#)