

# Cisco

## Exam Questions 300-430

Implementing Cisco Enterprise Wireless Networks (ENWLSI)



#### NEW QUESTION 1

A wireless engineer must implement a corporate wireless network for a large company in the most efficient way possible. The wireless network must support 32 VLANs for 300 employees in different departments. Which solution must the engineer choose?

- A. Configure a second WLC to support half of the APs in the deployment.
- B. Configure one single SSID and implement Cisco ISE for VLAN assignment according to different user roles.
- C. Configure different AP groups to support different VLANs, so that all of the WLANs can be broadcast on both radios.
- D. Configure 16 WLANs to be broadcast on the 2.4-GHz band and 16 WLANs to be broadcast on the 5.0-GHz band.

Answer: B

#### NEW QUESTION 2

Which two restrictions are in place with regards to configuring mDNS? (Choose two.)

- A. mDNS uses only UDP port 5436 as a destination port.
- B. mDNS cannot use UDP port 5353 as the destination port.
- C. mDNS is not supported on FlexConnect APs with a locally switched WLAN.
- D. Controller software must be newer than 7.0.6+.
- E. mDNS is not supported over IPv6.

Answer: CD

#### NEW QUESTION 3

Which QoS level is recommended for guest services?

- A. gold
- B. bronze
- C. platinum
- D. silver

Answer: B

#### NEW QUESTION 4

Which two statements about the requirements for a Cisco Hyperlocation deployment are true? (Choose two.)

- A. After enabling Cisco Hyperlocation on Cisco CMX, the APs and the wireless LAN controller must be restarted.
- B. NTP can be configured, but that is not recommended.
- C. The Cisco Hyperlocation feature must be enabled on the wireless LAN controller and Cisco CMX.
- D. The Cisco Hyperlocation feature must be enabled only on the wireless LAN controller.
- E. If the Cisco CMX server is a VM, a high-end VM is needed for Cisco Hyperlocation deployments.

Answer: AC

#### NEW QUESTION 5

Which command set configures a Cisco Catalyst 9800 Series Wireless Controller so that the client traffic enters the network at the AP switch port?

A.

```
config terminal
wireless profile policy [policy name]
local switching
end
```

B.

```
config terminal
wireless flexconnect policy [policy name]
local switching
end
```

A. 

```
config terminal
wireless flexconnect policy [policy name]
no central switching
end
```

B. 

```
config terminal
wireless profile policy [policy name]
no central switching
end
```

Answer: B

**NEW QUESTION 6**


What is the difference between PIM sparse mode and PIM dense mode?

- A. Sparse mode supports only one switch
- B. Dense mode supports multiswitch networks.
- C. Sparse mode flood
- D. Dense mode uses distribution trees.
- E. Sparse mode uses distribution tree
- F. Dense mode floods.
- G. Sparse mode supports multiswitch network
- H. Dense mode supports only one switch.

**Answer: C**

**NEW QUESTION 7**

Refer to the exhibit.

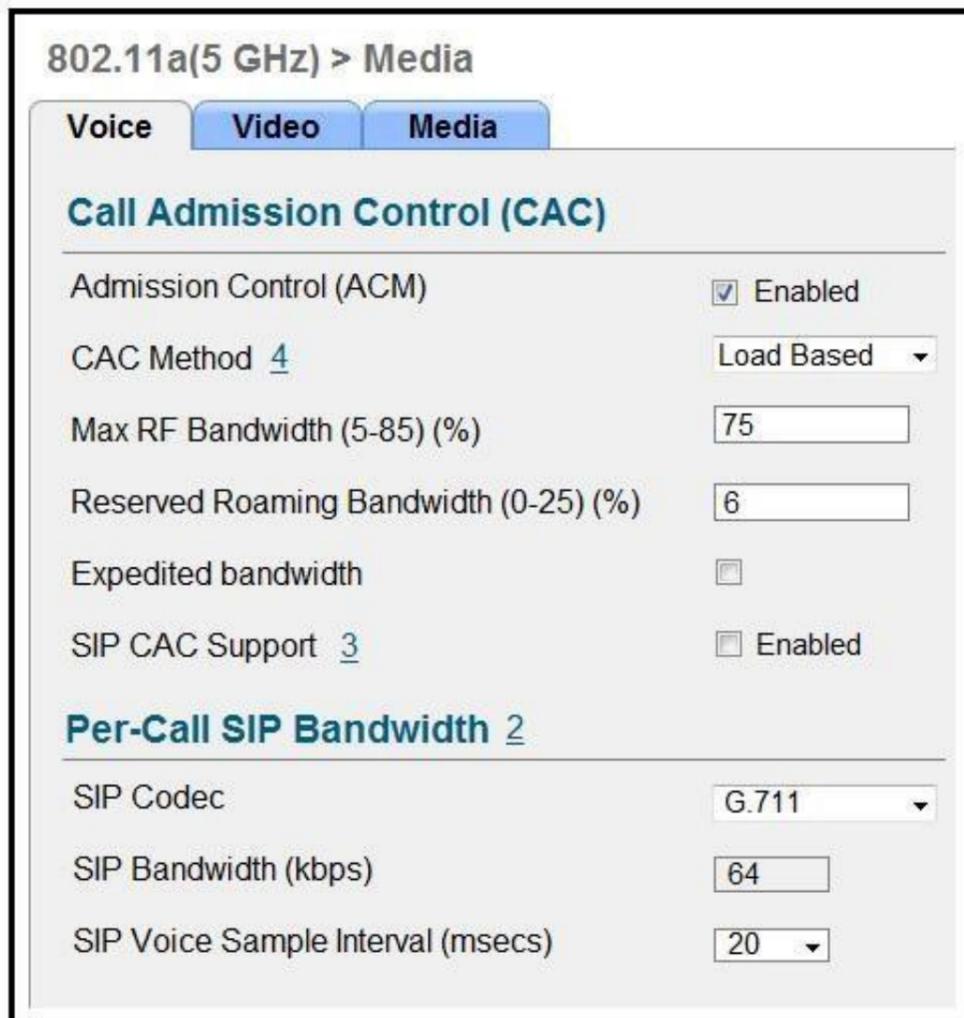

Which two items must be supported on the VoWLAN phones to take full advantage of this WLAN configuration? (Choose two.)

- A. TSPEC
- B. SIFS
- C. 802.11e
- D. WMM
- E. APSD

**Answer: CD**

**NEW QUESTION 8**

A user is trying to connect to a wireless network that is configured for WPA2-Enterprise security using a corporate laptop. The CA certificate for the authentication server has been installed on the Trusted Root Certification Authorities store on the laptop. The user has been prompted to enter the credentials multiple times, but the authentication has not succeeded. What is causing the issue?

- A. There is an IEEE invalid 802.1X authentication policy on the authentication server.
- B. The user Active Directory account is locked out after several failed attempts.
- C. There is an invalid 802.1X authentication policy on the authenticator.
- D. The laptop has not received a valid IP address from the wireless controller.

**Answer: C**

**NEW QUESTION 9**

For security purposes, an engineer enables CPU ACL and chooses an ACL on the Security > Access Control Lists > CPU Access Control Lists menu. Which kind of traffic does this change apply to, as soon as the change is made?

- A. wireless traffic only
- B. wired traffic only
- C. VPN traffic
- D. wireless and wired traffic

**Answer: A**

#### NEW QUESTION 10

The IT manager is asking the wireless team to get a report for all guest user associations during the past two weeks. In which two formats can Cisco Prime save this report? (Choose two.)

- A. CSV
- B. PDF
- C. XLS
- D. DOC
- E. plain text

**Answer:** AB

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/net\\_mgmt/prime/infrastructure/3-2/user/guide/bk\\_CiscoPrimeInfrastructure\\_3\\_2\\_0\\_UserGuide/bk\\_CiscoPrimeInfrastructure\\_3\\_2\\_0\\_UserGuide\\_chapter\\_01010.html](https://www.cisco.com/c/en/us/td/docs/net_mgmt/prime/infrastructure/3-2/user/guide/bk_CiscoPrimeInfrastructure_3_2_0_UserGuide/bk_CiscoPrimeInfrastructure_3_2_0_UserGuide_chapter_01010.html)

#### NEW QUESTION 10

Which devices can be tracked with the Cisco Context Aware Services?

- A. wired and wireless devices
- B. wireless devices
- C. wired devices
- D. Cisco certified wireless devices

**Answer:** A

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/wireless/context-aware-software/110836-cas-faq.html>

#### NEW QUESTION 15

All APs are receiving multicast traffic, instead of only the APs that need it. What is the cause of this problem?

- A. The multicast group includes all APs
- B. The wrong multicast address was used
- C. The multicast group is assigned the wrong VLAN
- D. Multicast IGMP snooping is not enabled

**Answer:** D

#### NEW QUESTION 16

Which two events are outcomes of a successful RF jamming attack? (Choose two.)

- A. disruption of WLAN services
- B. unauthentication association
- C. deauthentication broadcast
- D. deauthentication multicast
- E. physical damage to AP hardware

**Answer:** AE

#### NEW QUESTION 18

Which two steps are needed to complete integration of the MSE to Cisco Prime Infrastructure and be able to track the location of clients/rogues on maps? (Choose two.)

- A. Synchronize access points with the MSE.
- B. Add the MSE to Cisco Prime Infrastructure using the CLI credentials.
- C. Add the MSE to Cisco Prime Infrastructure using the Cisco Prime Infrastructure communication credentials configured during set up.
- D. Apply a valid license for Wireless Intrusion Prevention System.
- E. Apply a valid license for location tracking.

**Answer:** DE

#### NEW QUESTION 21

An engineer is performing a Cisco Hyperlocation accuracy test and executes the cmxloc start command on Cisco CMX. Which two parameters are relevant? (Choose two.)

- A. X, Y real location
- B. client description
- C. AP name
- D. client MAC address
- E. WLC IP address

**Answer:** AD

#### NEW QUESTION 23


A network engineer observes a spike in controller CPU overhead and overall network utilization after multicast is enabled on a controller with 500 APs. Which feature connects the issue?

- A. controller IGMP snooping
- B. multicast AP multicast mode
- C. broadcast forwarding
- D. unicast AP multicast mode

**Answer: B**

**NEW QUESTION 27**

Refer to the exhibit. An engineer must connect a fork lift via a WGB to a wireless network and must authenticate the WGB certificate against the RADIUS server. Which three steps are required for this configuration? (Choose three.)

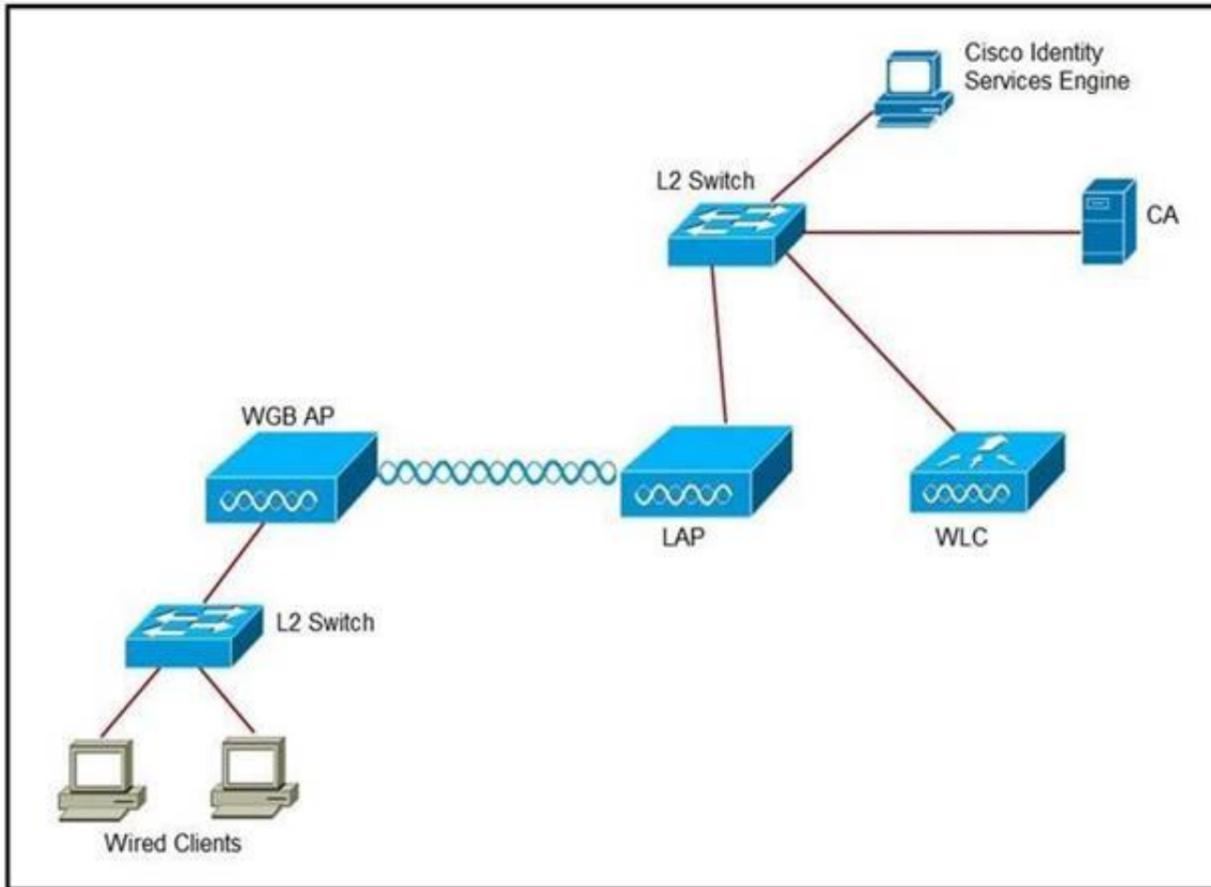

- A. Configure the certificate, WLAN, and radio interface on WGB.
- B. Configure the certificate on the WLC.
- C. Configure WLAN to authenticate using ISE.
- D. Configure the access point with the root certificate from ISE.
- E. Configure WGB as a network device in ISE.
- F. Configure a policy on ISE to allow devices to connect that validate the certificate.

**Answer: ACF**

**NEW QUESTION 31**

On a branch office deployment, it has been noted that if the FlexConnect AP is in standalone mode and loses connection to the WLC, all clients are disconnected, and the SSID is no longer advertised. Considering that FlexConnect local switching is enabled, which setting is causing this behavior?

- A. ISE NAC is enabled
- B. 802.11r Fast Transition is enabled
- C. Client Exclusion is enabled
- D. FlexConnect Local Auth is disabled

**Answer: D**

**NEW QUESTION 36**

An engineer must implement rogue containment for an SSID. What is the maximum number of APs that should be used for containment?

- A. 1
- B. 2
- C. 3
- D. 4

**Answer: D**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/wireless/technology/roguedetection\\_deploy/Rogue\\_Detection.html](https://www.cisco.com/c/en/us/td/docs/wireless/technology/roguedetection_deploy/Rogue_Detection.html)

**NEW QUESTION 40**

An engineer is implementing a FlexConnect group for access points at a remote location using local switching but central DHCP. Which client feature becomes available only if this configuration is changed?

- A. multicast
- B. static IP
- C. fast roaming
- D. mDNS

**Answer:** B

#### NEW QUESTION 45

What is the default NMSP echo interval between Cisco MSE and a Wireless LAN Controller?

- A. 10 seconds
- B. 15 seconds
- C. 30 seconds
- D. 60 seconds

**Answer:** B

#### Explanation:

Reference: [https://www.cisco.com/en/US/docs/wireless/mse/3350/6.0/CAS/configuration/guide/msecg\\_ch4\\_CAS.html](https://www.cisco.com/en/US/docs/wireless/mse/3350/6.0/CAS/configuration/guide/msecg_ch4_CAS.html)

#### NEW QUESTION 46

When implementing self-registration for guest/BYOD devices, what happens when an employee tries to connect four devices to the network at the same time?

- A. The last device is removed and the newly added device is updated as active device.
- B. The registration is allowed, but only one device is connected at any given time.
- C. All devices are allowed on the network simultaneously.
- D. Purge time dictates how long a device is registered to the portal.

**Answer:** B

#### NEW QUESTION 49

Where is Cisco Hyperlocation enabled on a Cisco Catalyst 9800 Series Wireless Controller web interface?

- A. Policy Profile
- B. AP Join Profile
- C. Flex Profile
- D. RF Profile

**Answer:** B

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/config-guide/b\\_wl\\_16\\_10\\_cg/cisco-hyperlocation.html](https://www.cisco.com/c/en/us/td/docs/wireless/controller/9800/config-guide/b_wl_16_10_cg/cisco-hyperlocation.html)

#### NEW QUESTION 53

A customer is experiencing performance issues with its wireless network and asks a wireless engineer to provide information about all sources of interference and their impacts to the wireless network over the past few days. Where can the requested information be accessed?

- A. CleanAir reports on Cisco Prime Infrastructure
- B. Performance reports on Cisco Prime Infrastructure
- C. Interference Devices reports on Cisco Wireless LAN Controller
- D. Air Quality reports on Cisco Wireless LAN Controller

**Answer:** A

#### NEW QUESTION 57

A wireless engineer needs to implement client tracking. Which method does the angle of arrival use to determine the location of a wireless device?

- A. received signal strength
- B. triangulation
- C. time distance of arrival
- D. angle of incidence

**Answer:** D

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Mobility/WiFiLBS-DG/wifich2.html>

#### NEW QUESTION 58

An engineer is implementing Cisco Identity-Based Networking on a Cisco AireOS controller. The engineer has two ACLs on the controller. The first ACL, named BASE\_ACL, is applied to the corporate\_clients interface on the WLC, which is used for all corporate clients. The second ACL, named HR\_ACL, is referenced by ISE in the Human Resources group policy. What is the resulting ACL when a Human Resources user connects?

- A. HR\_ACL appended with BASE\_ACL
- B. HR\_ACL only
- C. BASE\_ACL appended with HR\_ACL
- D. BASE\_ACL only

**Answer:** B

**NEW QUESTION 60**

Which three characteristics of a rogue AP pose a high security risk? (Choose three.)

- A. open authentication
- B. high RSSI
- C. foreign SSID
- D. accepts clients
- E. low RSSI
- F. distant location

**Answer:** ACD

**NEW QUESTION 63**

A Cisco WLC has been added to the network and Cisco ISE as a network device, but authentication is failing. Which configuration within the network device configuration should be verified?

- A. SNMP RO community
- B. device interface credentials
- C. device ID
- D. shared secret

**Answer:** D

**NEW QUESTION 68**

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **300-430 Practice Exam Features:**

- \* 300-430 Questions and Answers Updated Frequently
- \* 300-430 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-430 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* 300-430 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 300-430 Practice Test Here](#)**