

VMware

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x



NEW QUESTION 1

An architect is designing a vSphere environment for a customer and learns that the customer has:

- A single vSphere cluster
- Two storage arrays with different RAID capabilities

Which two design decisions should the architect make to maximize data availability and data performance for this customer? (Choose two.)

- A. Use Storage DRS.
- B. Use VMDK anti-affinity rules.
- C. Use multiple datastores for heartbeat.
- D. Use a minimum of three storage arrays.
- E. Use VM to host DRS rules.

Answer: AC

NEW QUESTION 2

A customer requests a review of its current vSphere platform design.

The following information is noted:

- There are three different workload profiles for the virtual machines:
- Tier-1 virtual machines operate resource-intensive applications and require dedicated allocations for CPU and RAM.
- Tier-2 virtual machines operate internet-facing applications and require access to externally facing networks.
- Tier-3 virtual machines operate platform management tools such as vCenter Server and have different lifecycle management requirements.
- Tier-1, Tier-2 and Tier-3 virtual machines are all hosted on a single large vSphere cluster.
- The Chief Information Security Officer (CISO) has raised concerns that hosting externally facing applications alongside management tools does not meet internal compliance standards.
- The Operations team has raised concerns about Tier-1 virtual machines negatively impacting the performance of vCenter Server.
- The Operations lead has stated that management changes have consistently been rejected by application teams.

As a result of the review, which recommendation should the architect make regarding the design of this platform?

- A. Separate Tier-1, Tier-2 and Tier-3 virtual machines using dedicated distributed virtual switches (DVS)
- B. Separate Tier-2 virtual machines onto a dedicated cluster
- C. Separate Tier-1, Tier-2 and Tier-3 virtual machines onto dedicated clusters
- D. Separate Tier-1, Tier-2 and Tier-3 virtual machines using resource pools and shares

Answer: C

NEW QUESTION 3

An architect is designing a VMware solution for a customer based on the following information:

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing IPv4 based network infrastructure.
- There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 4

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 5

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 6

An architect is designing a new vSphere environment to meet the following requirements:

- The environment must support 5,000 virtual machines.
- The environment will be built initially using 350 hosts.

Which vCenter Server appliance deployment size should the architect specify for the design?

- A. Large
- B. Small
- C. Tiny
- D. Medium

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-077C7523-E0EA-492>

NEW QUESTION 7

An architect makes the design decision to install ESXi on embedded and resilient 8 GB SD cards. What is the impact of this design decision?

- A. Host profiles must be used for this kind of installation
- B. Scratch partition would need to be created on the external storage
- C. The size of the SD cards is too small and the installation will fail
- D. The vSphere Auto Deploy feature must be enabled on vCenter Server

Answer: B

Explanation:

<https://kb.vmware.com/s/article/2074026> You can store coredumps on the SD boot media, but refrain from configuring the scratch partition here as the logs are write intensive and can cause the SD card to fail faster resulting in re-installation of ESXi

NEW QUESTION 8

An architect is designing a new vSphere platform to meet a list of requirements from the security team. Which two requirements would be classified as non-functional requirements? (Choose two.)


- A. Migration of virtual machines between hosts must be encrypted
- B. Log information must be verbose to support incident resolution
- C. Critical events generated within the platform must be logged to an external Syslog service
- D. Data integrity must be ensured
- E. A common content library must be maintained across all data centers

Answer: CD

NEW QUESTION 9

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:

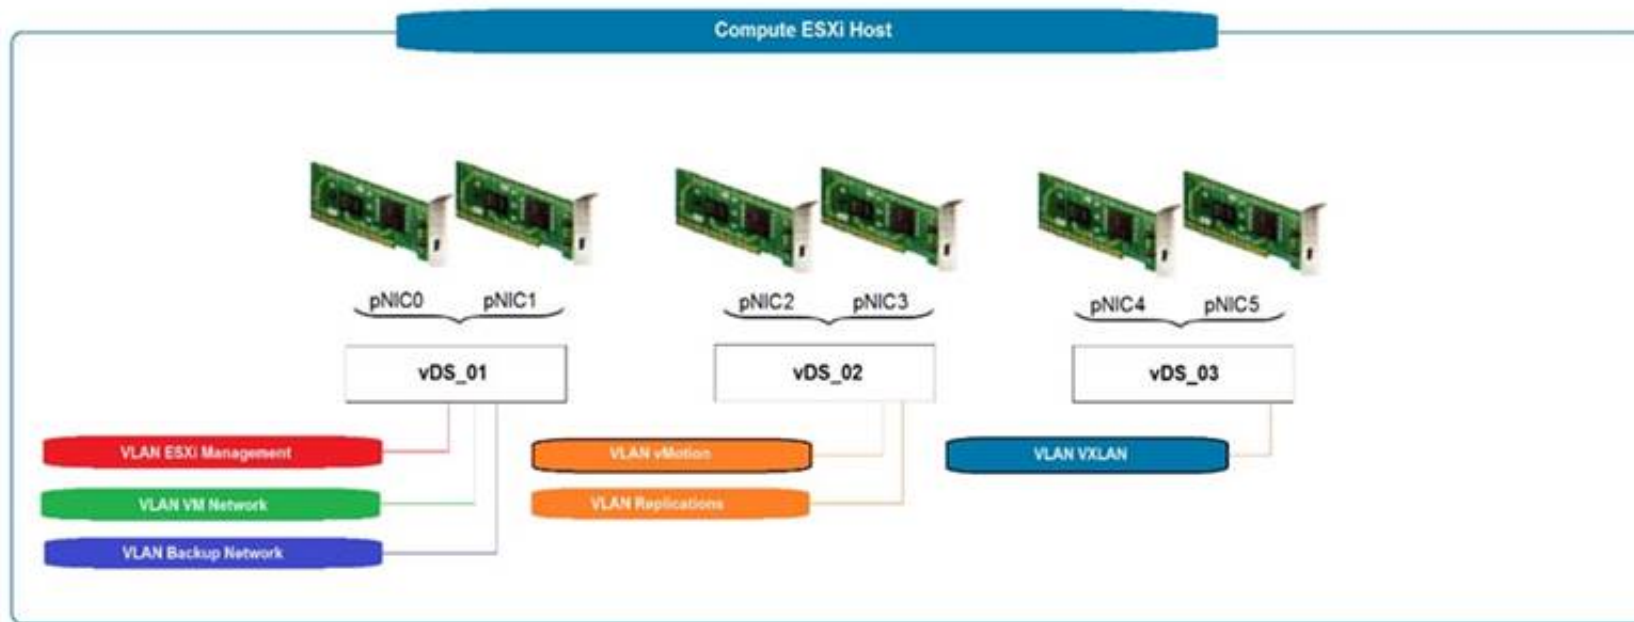

What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup network Use explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 10

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 10

During a requirements gathering workshop, the customer provides the following requirement:

- A new vSphere platform must be designed securely and all interfaces must be protected against potential snooping.
- How should this non-functional security requirement be documented?

- A. Interfaces must be audited.
- B. Encrypted channels must be used for all communications.
- C. Unauthorized access to interfaces must be reported within 15 minutes.
- D. Communications must be through Private VLANs (PVLAN).

Answer: A

NEW QUESTION 15

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- Full virtual machine image backup and restore
- Incremental virtual machine image backup and restore
- File level backup and restore within both Windows and Linux virtual machines
- LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?


- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 16

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

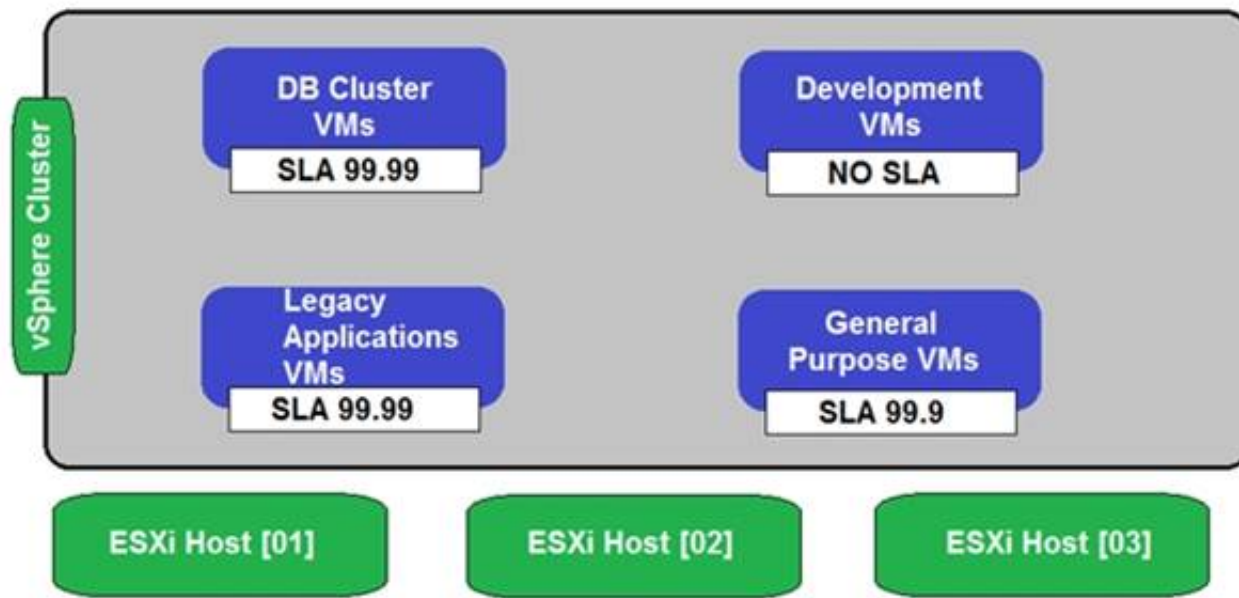

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 19

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

Answer: BE

NEW QUESTION 24

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 26

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster.Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster.Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain.Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain.Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 28

During a requirements gathering workshop, the customer provides the following requirement that is pertinent to the design of a new vSphere environment:

- The Maximum Tolerable Downtime (MTD) for all Tier 1 applications is one hour. Which requirement classification is being gathered for the design documentation?

- A. Manageability
- B. Performance
- C. Availability
- D. Recoverability

Answer: C

NEW QUESTION 32

During a requirements gathering workshop, the customer provides the following information:

- Each host has 2 × 10 GbE NIC
- EtherChannel is not currently configured
- No changes can be made to the physical network
- Network throughput must be prioritized for defined critical services

Which two recommendations should the architect make with regard to virtual networking? (Choose two.)

- A. Use Route Based on Physical NIC Load.
- B. Use Network I/O Control with Shares.
- C. Use Network I/O Control with Reservation.
- D. Use Link Aggregation Control Protocol (LACP).
- E. Use Network I/O Control with Limits.

Answer: AD

NEW QUESTION 34

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 36

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 41

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 46

A customer has a database cluster with 40/60 read/write ratio and a high IOPs requirement with no contention on an all-flash vSAN cluster. Which two storage settings should be configured for best performance? (Choose two.)

- A. IOPs limits enabled
- B. RAID 1
- C. Deduplication and Compression disabled
- D. RAID 5/6
- E. Deduplication and Compression enabled

Answer: AB

NEW QUESTION 47

There is a request for approved virtual machine applications through a new vSphere platform's integrated automation portal. The platform was built following all provided company security guidelines and has been assessed against Sarbanes-Oxley Act of 2002 (SOX) regulations.

The platform has the following characteristics:

- vRealize Operations is being used to monitor all clusters.
- There is a dedicated ESXi cluster, supporting all management services.
- All network traffic is via distributed virtual switches (DVS). There is a dedicated ESXi cluster for all line-of-business applications.
- Network traffic is serviced by NSX-T.

There is a dedicated ESXi cluster for virtual desktop infrastructure (VDI).

- Network traffic is serviced by NSX-T.

The application owner is requesting approval to install a new service that must be protected as per the Payment Card Industry (PCI) Data Security Standard.

Which additional non-functional requirement should the architect include in the design to support the new service?

- A. The vSphere hosting platform and all PCI application virtual machines must be assessed against Payment Card Industry (PCI) Data Security Standard compliance.
- B. The vSphere hosting platform and all PCI application virtual machines must be assessed for SOX compliance.
- C. The vSphere hosting platform and all PCI application virtual machine network traffic must be routed via NSX-T.
- D. The vSphere hosting platform and all PCI application virtual machines must be monitored using the vRealize Operations Compliance Pack for Payment Card Industry.

Answer: A

NEW QUESTION 50

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 51

An architect is designing a vSphere environment for a customer based on the following information:

- The vSphere cluster will have three hosts only due to budget considerations.
- A database cluster (node majority) consisting of three virtual machines will be running on the vSphere cluster.

Which two recommendations can the architect make so that the customer achieves the highest level of application availability while taking into consideration operational resiliency? (Choose two.)

- A. Create VM-VM anti-affinity rules
- B. Set das.respectvmvmantiaffinityrules to false
- C. Create VM-Host anti-affinity rules
- D. Disable vSphere HA during maintenance
- E. Set das.ignoreinsufficienthbdastore to true

Answer: BC

NEW QUESTION 55

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 57

An architect decides to separate virtual desktops and application servers into separate vSphere clusters to meet security and management requirements. What are two implications of this design decision? (Choose two.)

- A. There will be an increase in management overhead.
- B. Identical hardware must be procured for all hosts.
- C. There will be a reduction in performance.
- D. The patching cycles will affect both clusters at the same time.
- E. There will be additional licensing and cost requirements for both clusters.

Answer: DE

NEW QUESTION 58

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should for the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 63

A customer has six hosts available in a cluster. When running at full capacity, all virtual machines can be run on two hosts.

How many hosts can the customer place into maintenance mode at the same time while still providing N+2 resiliency to the cluster?

- A. Two
- B. Three
- C. One
- D. None

Answer: A

NEW QUESTION 64

Which two of the listed requirements would be classified as performance non-functional requirements? (Choose two.)

- A. The vSphere platform must be able to provide a recovery time objective of 30 minutes
- B. The vSphere platform must be able to provide a minimum throughput of 400 MB/s
- C. The vSphere platform must be able to provide N+1 redundancy
- D. The vSphere platform must be able to provide a maximum read latency of 15 ms
- E. The vSphere platform must be able to provide a service-level agreement (SLA) of 99,9%

Answer: BD

NEW QUESTION 67

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space.

Which solution meets the customer requirements?

- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups
- D. Array-based encryption

Answer: D

NEW QUESTION 72

A new vSphere platform is being created. The platform will host virtual machines that will run management services and line-of-business applications.


What should the architect consider when designing the number and type of clusters required?

- A. Maximum tolerable downtime
- B. Predicted platform growth
- C. Auditing requirements for the virtual machines
- D. The level of isolation required between virtual machine classifications

Answer: D

NEW QUESTION 73

Refer to the exhibit.

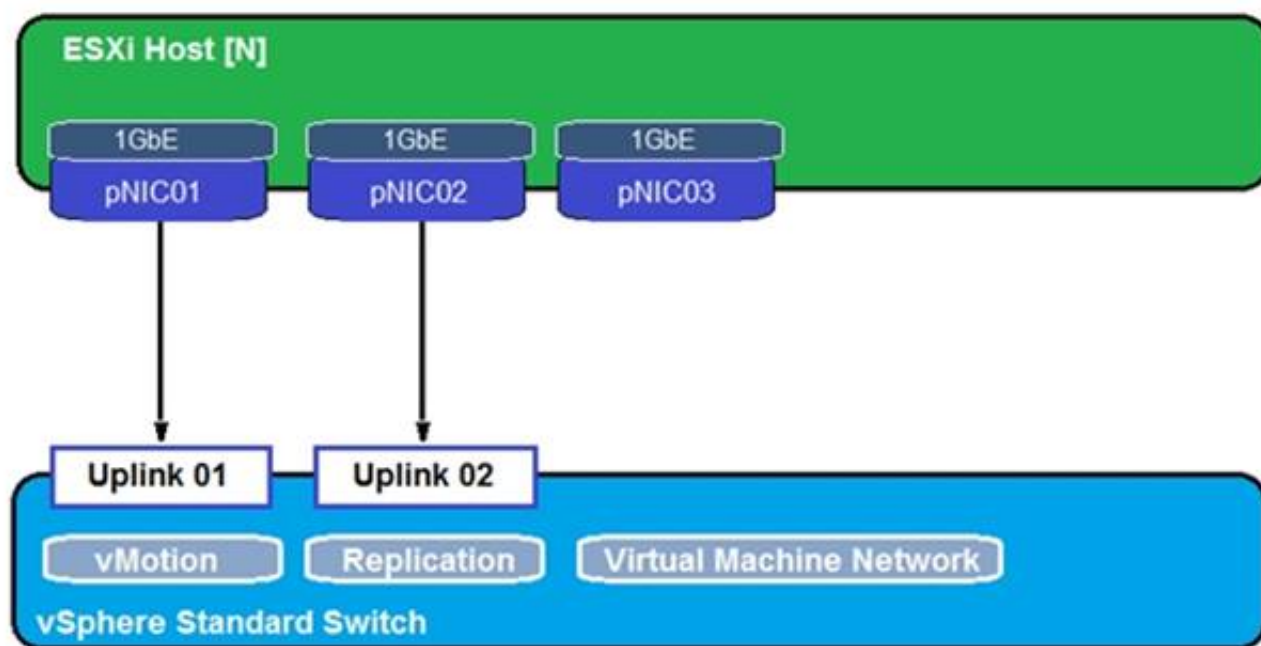

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:
 The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 76

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).
 Their current environment consists of the following components:

- > vSphere 7.0 and vSAN 7.0
- > External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- > 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments.
 Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 81

An architect is finalizing the design for a new vCenter Server High Availability deployment. What is one thing the architect must document in the design?

- A. The load balancing algorithm used by the Management Distributed Virtual Switches (DVS)
- B. The SSH configuration settings for the vCenter Server's active node
- C. The vCenter Management Network IPv4 addresses for the witness node vCenter Server
- D. The details of each of the vCenter Server licenses for active, passive and witness nodes

Answer: C

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-9B176C8A-4EEE-4A>

NEW QUESTION 83

An architect is designing a new vSphere environment with the following resources:

- > 600 vCPU

➤ 5,760 GB RAM

Average resource usage is:

➤ 60 vCPU

➤ 1,152 GB RAM

The design must meet the following requirements:

➤ The environment has the ability to burst by 25%.

➤ Each host can schedule 36 vCPUs and has 512 GB RAM.

➤ Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

A. Three

B. Five

C. Four

D. Two

Answer: D

NEW QUESTION 85

Which two statements are true about gathering functional business and application requirements? (Choose two.)

A. It focuses on functional requirements with C-level stakeholders

B. It leverages a single set of QUESTION NO:s for all stakeholders

C. It might require multiple rounds of stakeholder interviews

D. It builds stakeholder consensus

E. It is a non-iterative process

Answer: AC

NEW QUESTION 86

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

A. RAID controller with Passthru mode

B. RAID controller with RAID 5 mode

C. RAID controller with RAID 10 mode

D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 89

As part of a requirements gathering workshop, the customer provides the following requirements for the design of a new greenfield virtual infrastructure:

➤ Some applications have a latency that must be less than 5 minutes.

➤ The solution must be able to support a workload growth rate of 10% per year. Which requirement classification is being gathered for the design documentation?

A. Performance

B. Manageability

C. Recoverability

D. Availability

Answer: A

NEW QUESTION 92

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.21 Practice Test Here](#)