

Exam Questions 300-810

Implementing Cisco Collaboration Applications (CLICA)

<https://www.2passeasy.com/dumps/300-810/>



NEW QUESTION 1

Which two protocols does the Cisco IM Presence service use to federate with external domains? (Choose two.)

- A. XMPP
- B. SNMP
- C. SIP
- D. SCCP
- E. SMPP

Answer: AC

NEW QUESTION 2


To redirect calls from the phone extension for user A to the voicemail greeting, which call routing rule should be used in Cisco Unity Connection?

- A. Attempt Forward forwarded routing rule
- B. Opening Greeting direct routing rule
- C. Attempt Sign-In direct routing rule
- D. Opening Greeting forwarded routing rule

Answer: A

NEW QUESTION 3

Refer to the exhibit.

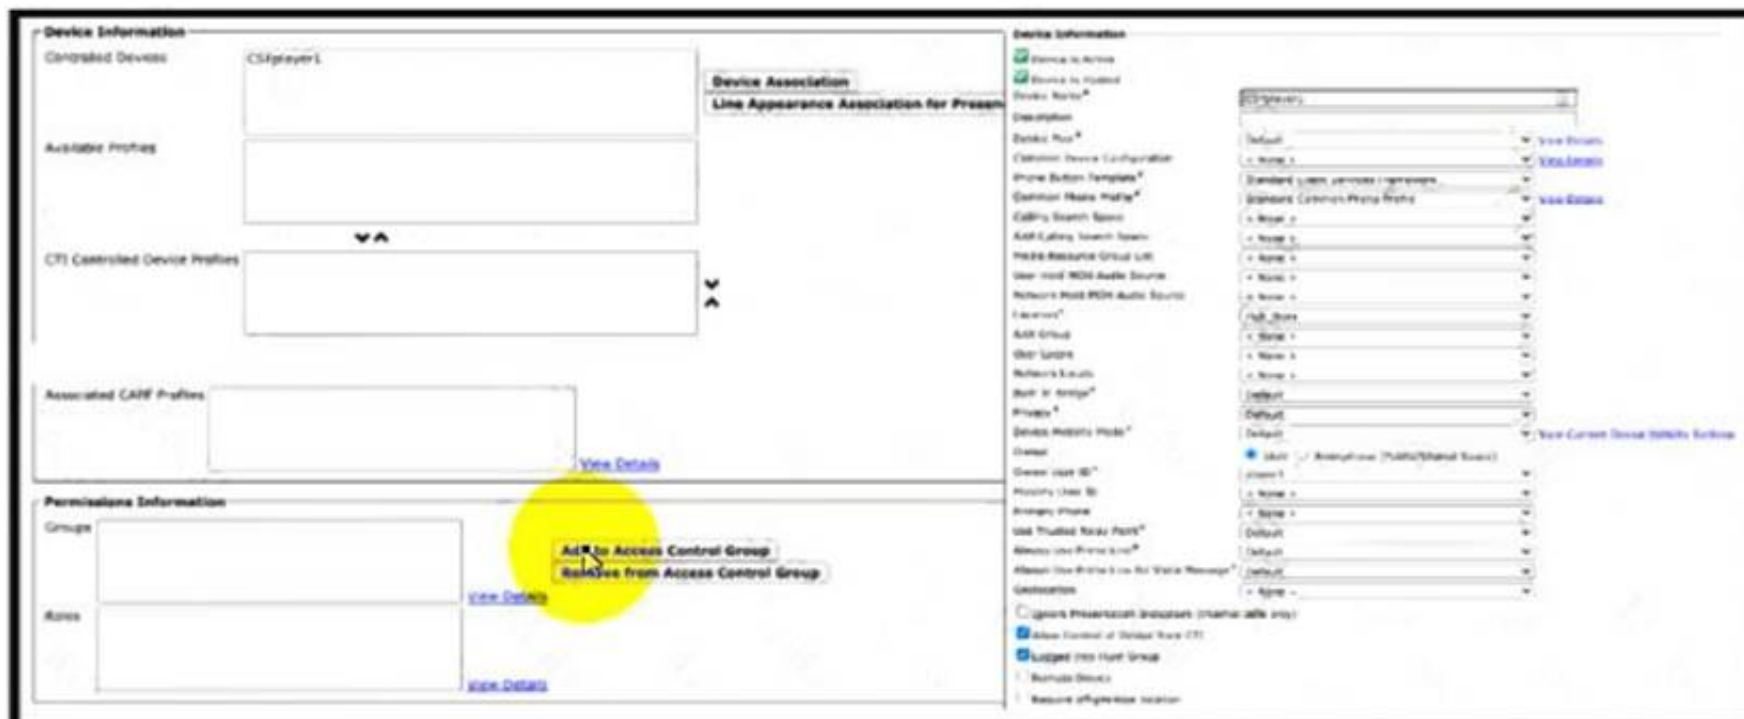

A Cisco Jabber for windows users Is reporting an Issue with phone control. Which action will resolve this issue?

- A. Change the privacy setting on the CSF device to "Off".
- B. Uncheck "logged into hunt group" on the user's CSF device.
- C. Create a device profile for the phone.
- D. Add the standard CCM end users and standard CTI enabled permission groups for the user.

Answer: D

NEW QUESTION 4

Which DNS record is used for on-premises service by Jabber clients?

- A. _collab-edge._tcp.<domain> SRV record
- B. _cisco-uds._tls.<domain> SRV record
- C. _cisco-uds._tcp.<domain> SRV record
- D. <tftp server FQDN> A record

Answer: C

NEW QUESTION 5

A collaboration engineer configured high availability for Cisco IM and Presence service The engineer wants to ensure that client failovers do not disrupt other users on the secondary node What must the engineer configure to accomplish this goal?

- A. "Maximum Requests Per Child" on the SIP Proxy service
- B. "Maximum database requests to allow" on the XCP Router service
- C. "EWS Status Frequency" on the Presence Engine service
- D. "CUPC 8.5 And Higher - Re-Login Limits" on the Server Recovery Manager service

Answer: D

NEW QUESTION 6

An engineer is configuring DNS for service discovery in a jabber deployment for On-premises Clients. Which snippet will complete the SRV record name _

tcp.example.com?

- A. _cisco_uds
- B. _collab_edge
- C. _xmp
- D. server
- E. _xmpp-client

Answer: A

NEW QUESTION 7

Which SAML component specifies the mapping of SAML assertion protocol message exchanges with standard messaging formats or communication protocols such as SOAP exchanges?

- A. SAML binding
- B. SAML assertion
- C. SAML profiles
- D. SAML protocol

Answer: A

NEW QUESTION 8

Which SSO authentication method requires no action from the user when the session token times out?

- A. web form
- B. smart card
- C. external database
- D. local authentication

Answer: A

NEW QUESTION 9

Which two Cisco Unity Connection logs are used to troubleshoot issues with Message Waiting Indicators? (Choose two.)

- A. Connection IMAP Server
- B. Connection Mailbox Sync
- C. Connection Notifier
- D. Connection Message Transfer Agent
- E. Connection Conversation Manager

Answer: CE

Explanation:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/11x/troubleshooting/guide/b_11xcuctsg/b_1

NEW QUESTION 10

Users report that they are unable to check voicemail. and an engineer discovers that the voicemail system is not routing calls between Cisco Unity Connection and Cisco UCM via SCCP Which action should be taken to resolve this issue?

- A. Verify registration of the CTI ports.
- B. Verify OPTIONS Ping in the SIP trunk profile.
- C. Verify voicemail SIP trunk in the route list.
- D. Verify Calling Search Space in the Directory Number setting.

Answer: D

NEW QUESTION 10


In the integration of Cisco Unity Connection using SIP, which SIP trunk security profile option is required for MWI to work correctly?

- A. Accept out-of-dialog refer
- B. Accept replaces header
- C. Accept unsolicited notification
- D. Accept presence subscription

Answer: C

NEW QUESTION 14

Refer to the exhibit.

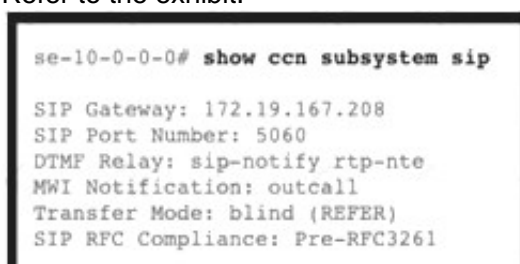

```
se-10-0-0-0# show ccn subsystem sip

SIP Gateway: 172.19.167.208
SIP Port Number: 5060
DTMF Relay: sip-notify rtp-nte
MWI Notification: outcall
Transfer Mode: blind (REFER)
SIP RFC Compliance: Pre-RFC3261
```

An administrator is configuring a Cisco Unity Express call handler. One of the options will transfer calls off-system to Cisco UCME. The administrator wants the

transfer to finish while the transfer target is ringing. Which transfer-mode command completes the configuration?

- A. attended
- B. blind refer
- C. semi-attended
- D. Wind bye-also

Answer: C

NEW QUESTION 18

An engineer is checking the Cisco Unified Communications Manager and Cisco Unity Connection integration and presses the Message button on a phone to check the voicemail. Which action does Cisco Unified CM take?

- A. Cisco Unified CM looks up the voicemail pilot configured to dial.
- B. Cisco Unified CM routes the configured hunt pilot to Unity Connection.
- C. Cisco Unified CM looks up the hunt pilot configured to dial.
- D. Cisco Unified CM sends an AXL query to Unity Connection.

Answer: A

NEW QUESTION 22

Which statement about SIP federation between Cisco Unified Communications IM and Presence and Microsoft Skype for Business is true?

- A. Add the federated user as a contact in Jabber to view its presence status.
- B. The role of SIP Proxy service is to process the XMPP packet in from Jabber and convert it to SIP.
- C. TLS is optional.
- D. Use of directory URI as an IM addressing scheme is not supported.

Answer: A

NEW QUESTION 27

SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A. The browser follows the redirect and issues an HTTPS GET request to the IdP.
- B. The IdP checks for a valid browser session.
- C. The service provider generates a SAML authentication request.
- D. The SAML request is maintained as a query parameter in the GET request.

Answer: C

NEW QUESTION 28

An engineer is configuring a remote Cisco IM and Presence Service and needs to ensure that users can communicate across clusters in the same domain and receive presence status. Which protocol should be used to accomplish this task?

- A. XMPP
- B. DNS
- C. LDAP
- D. AXL/SOAP

Answer: A

NEW QUESTION 33


An engineer is configuring Cisco Unity Connection to provide messaging services and needs to designate a set of phone numbers to be used for transferring calls within the organization to prevent toll fraud. Which mechanism in Cisco Unity Connection should be modified to accomplish this goal?

- A. restriction tables
- B. calling search spaces
- C. transfer rules
- D. fraud tables

Answer: A

NEW QUESTION 37

Refer to the exhibit.

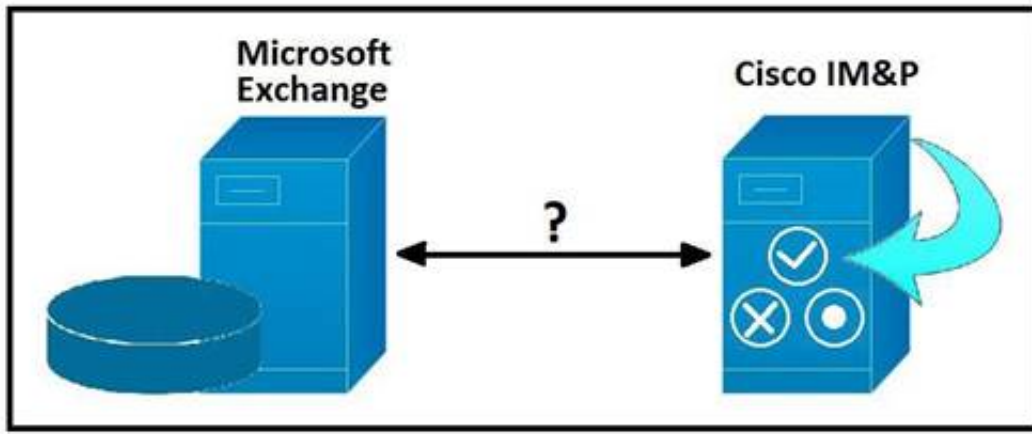

Which protocol is used for communication between Cisco IM and Presence and Microsoft Exchange Server?

- A. POP3
- B. IMAP
- C. EWS
- D. XMPP

Answer: C

NEW QUESTION 39


Which two steps are needed to configure high availability in Cisco IM and presence? (choose two.)

- A. Enable the Failover Check box
- B. Configure CUP administrator
- C. Assign the subscriber to the redundancy group
- D. Select the enable high availability checkbox and save the configuration change
- E. Configure the CUP AXL user.

Answer: CD

NEW QUESTION 44

Refer to the exhibit.

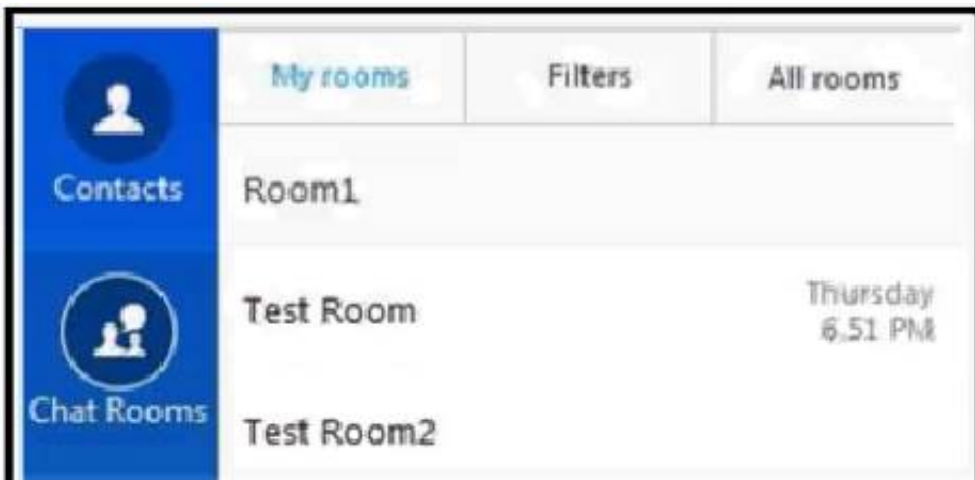


Persistent Chat is configured in the Cisco IM and Presence server using PostgreSQL as the back-end database. Users report that the Chat Rooms icon is missing from their Cisco Jabber clients. Which action should the administrator take to resolve this issue?

- A. Start the Cisco XCP Message Archiver.
- B. Start the Cisco XCP Text Conference Manager.
- C. Restart the Cisco XCP Directory Service
- D. Restart the Cisco XCP XMPP Federation Connection Manager.

Answer: B

NEW QUESTION 48

Refer to the exhibit.

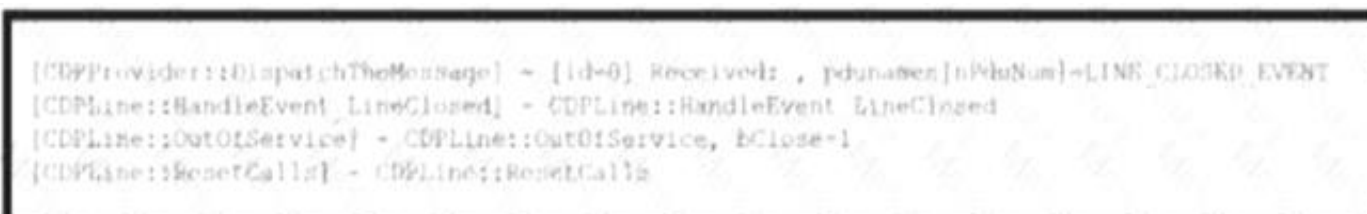

After receiving a new desk phone, the Jabber user can no longer make calls via phone control. The help desk collected the user's Jabber problem report and verified that they the correct Cisco UCM CTI permissions. Which configuration must be changed to correct this issue?

- A. Verify that the desk phone device has Allow Control of Device from CTI enabled.
- B. Verify that the Cisco UCM service profile has Cisco UCM CTI servers configured.
- C. Verify that the user's desk phone device is listed as a controlled device in the Cisco UCM end user configuration
- D. Verify that the device line configuration has Allow Control of Device from CTI enabled.

Answer: A

NEW QUESTION 53

A collaboration engineer is configuring SIP interdomain federation for Cisco IM and Presence. The external domain cannot be discovered using DNS SRV. If the external enterprise domain is ciscocollab.com, what destination pattern should the engineer use for a static route?

- A. com.ciscocollab.*
- B. _sipfederationtls._tcp.ciscocollab.com
- C. *.ciscocollab.com,*
- D. .ciscocollab.com

Answer: B

NEW QUESTION 55

Refer to the exhibit.

```
cm_xmpp_fed: b4291b90| INFO | XMPPServerOutDir: Could not resolve 'jabber.example.com' using SRV _jabber._tcp. Failing the outbound connection.
```

An administrator is troubleshooting an issue with XMPP Federation between two, eight-node IM and Presence clusters. After looking at the logs, the administrator finds this message and must publish one or more DNS SRV records containing one or more addresses of the IM and Presence node(s). How many nodes must be selected to publish?

- A. 1
- B. 5
- C. 10
- D. 20

Answer: A

NEW QUESTION 59

Refer to Exhibit.

Monitored Node	Assigned Users	Active Users	Node State	Node Reason
10.48.53.57	1	3	Running in Backup Mode	Critical Service Down
10.48.53.58	2	0	Failed Over with Critical Services not Running	Critical Service Down

An engineer is troubleshooting operation performance in the network. Which account should be taken to restore high availability in the sub cluster?

- A. Start all critical services on the second node, and select the Fallback button in the "Presence Redundancy Group Configuration"
- B. Go to "Presence Redundancy Group Configuration" on the Cisco UCM Administration page and select the Fallback button.
- C. Start all critical services on both nodes and select "rebalance users" in the "Presence User Assignment"
- D. Go to "Presence User Agreement" on the Cisco UCM Administration page and select "rebalance users" for all users.

Answer: A

NEW QUESTION 61

Fraudulent calls are being made from Cisco Unity Connection. Which action prevents the calls from reaching the PSTN using SCCP integration?

- A. Change the configuration of the routing rule.
- B. Change the CSS of the voicemail port.
- C. Change the Rerouting CSS on the trunk to Cisco Unity Connection.
- D. Remove values from restriction table.

Answer: B

NEW QUESTION 66

A customer is using Cisco Unified IM and Presence with high availability and has reported that their primary node is not providing any IM and Presence services. What is causing this issue?

- A. The presence redundancy group node state of the primary node is 'idle'.
- B. The presence redundancy group node state of the peer node is "normal".
- C. The presence redundancy group node state of the primary node is 'initializing'.
- D. The presence redundancy group node state of the peer node is 'running in backup mode'.

Answer: D

NEW QUESTION 69

An organization has two Cisco IM and Presence clusters: one in the Americas and one in EMEAR. Both clusters connect via an intercluster peer. Each Cisco IM and Presence cluster has four nodes logically divided into two subclusters with high availability enabled with its local peers. When the Cisco IM and Presence publisher node in the Americas fails, to where are the users failed over?

- A. Cisco IM and Presence publisher in EMEA
- B. in the different logical group

- C. Cisco IM and Presence subscriber in the Americas, in the different logical group
- D. Cisco IM and Presence subscriber in EMEA
- E. in the same logical group with IM and Presence publisher
- F. Cisco IM and Presence subscriber in the Americas, in the same logical group with IM and Presence publisher

Answer: D

NEW QUESTION 71

An engineer is assisting a user who is reporting Jabber desk phone control issues. The user has two desk phones, but jabber controls only one of them. The user is not given the option to select the second phone within the Jabber client. Everything else is functioning normally with Jabber and with both desk phones. Which action resolves this issue?

- A. Set the Owner User ID on the second phone
- B. Ensure that both phones are in the same device pool
- C. Add the problematic phone to the user's Controlled Devices list
- D. Enable "Allow Control of Device from CTI" on the second phone.

Answer: D

NEW QUESTION 73

An administrator is configuring Cisco Unity Connection call handlers. The administrator wants to ensure that all outside callers are played a welcome message and then are transferred to a live operator. The administrator wants to restrict the callers from interrupting the welcome message with key presses. Under which call handler menu is this task accomplished?

- A. Greetings
- B. Transfer Rules
- C. Caller Input
- D. Message Settings

Answer: C

NEW QUESTION 76

A collaboration engineer is installing the Cisco Jabber client from the Windows CLI. The engineer wants to complete a silent installation of the client, clear any existing bootstrap file, and use a Service Domain of cisco.com. Which install command achieves these goals?


- ☐ `msiexec /i CiscoJabberSetup.msi CLEAR=1 SERVICES_DOMAIN=cisco.com`
- ☐ `msiexec /i CiscoJabberSetup.msi CLEAR=0 SERVICES_DOMAIN=cisco.com`
- ☒ `msiexec /i CiscoJabberSetup.msi /quiet CLEAR=1 SERVICES_DOMAIN=cisco.com`
- ☐ `msiexec.exe /i CiscoJabberSetup.msi /quiet CLEAR=1 SSO_ORG_DOMAIN=cisco.com`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 80

Refer to the exhibit.

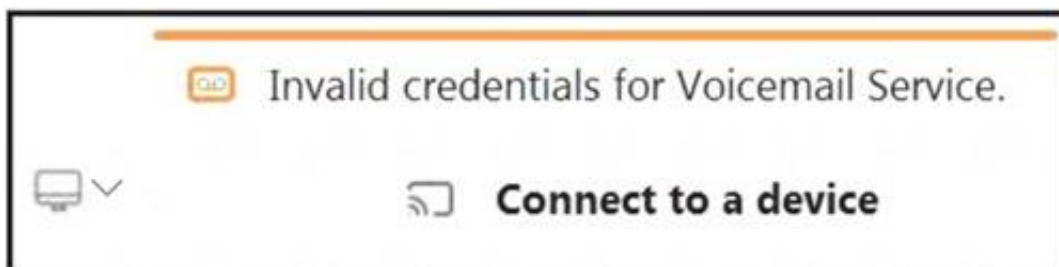


A Jabber user is unable to access voicemail. During troubleshooting, an administrator captures this screenshot. What are the two ways to resolve this issue? (Choose two.)

- A. Ask the user to click on the "Connect to a device" button and use the correct username and password.
- B. Ensure the user is not locally created on Cisco Unity Connection with a password expiring separately from the password that is used for Jabber.
- C. Make sure the Jabber service profile created in Cisco UCM contains Unity Connection UC service with a voicemail server configured.
- D. Ask an administrator to create an account for this user in Cisco Unity Connection but remove the Unity Connection UC service from the Cisco UCM Jabber service profile. Check if "OAuth with Refresh Login Flow" is enabled on Cisco Unity Connection but disabled in Cisco UCM.

Answer: AB

NEW QUESTION 84

Refer to the exhibit.

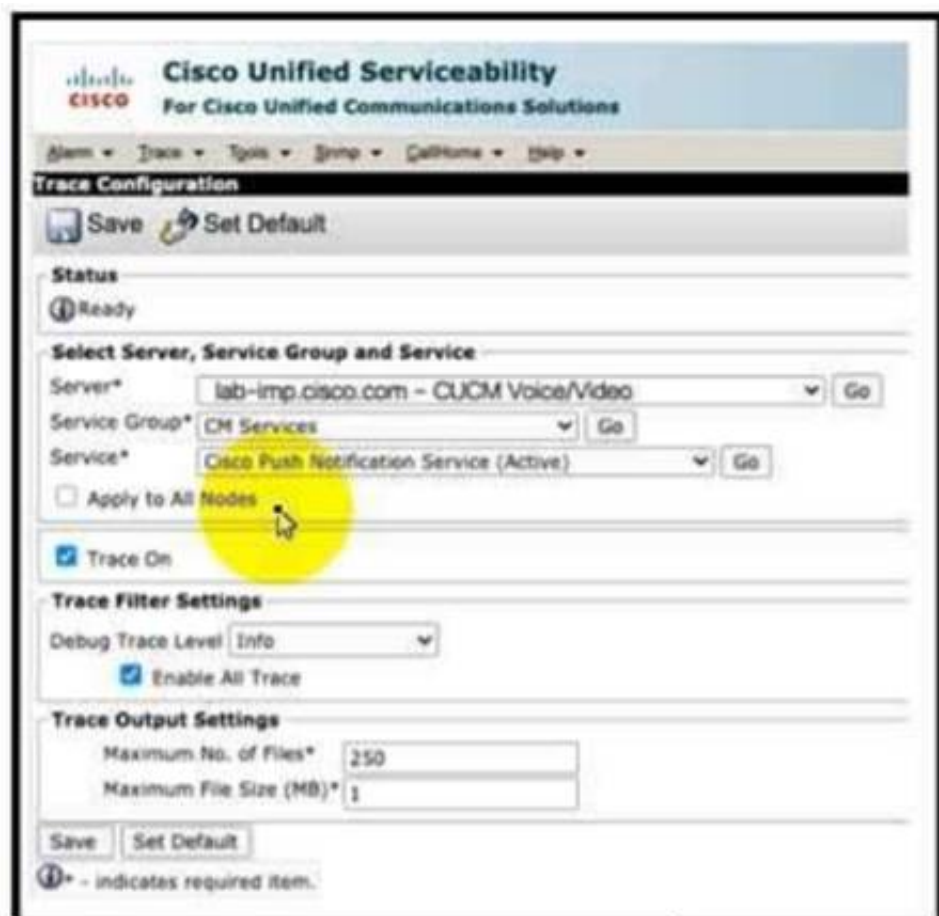

An administrator troubleshoots push notifications, and Cisco TAC requests the trace files from the cluster. From which location should the files be collected?

- ☐ /var/log/active/imp/trace/cmas/log4j/
- ☐ /var/log/active/cm/trace/ccmpns/log4j/
- ☐ /var/log/active/cm/trace/cmas/log4j/
- ☐ /var/log/active/cm/trace/ccm/log4j/

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 87

A collaboration engineer wants to stop fraudulent calls to the PSTN that are being made through Cisco Unity Connection. Cisco Unity Connection is integrated with Cisco UCM via the SCCP protocol. Which action accomplishes this goal?

- A. Change the Rerouting CSS on the trunk to Cisco Unity Connection
- B. Change the CSS of the voicemail port
- C. Change the configuration of the routing rule
- D. Remove values from the restriction table

Answer: B

NEW QUESTION 92

Refer to the exhibit.

High Availability				
Monitored Node	Assigned Users	Active Users	Node State	Node Reason
10.48.53.57	1	3	Running in Backup Mode	Critical Service Down
10.48.53.58	2	0	Failed Over with Critical Services not Running	Critical Service Down

An organization is moving from on-premise Exchange to Microsoft Office 365 for email and calendaring. The administrator would like to maintain meeting presence functionality in Jabber clients connected to Cisco IM and Presence after this move. Office 365 certificates must be installed to accomplish this. Which two trust stores should these certificates be uploaded to on Cisco IM and Presence? (Choose two.)

- A. cup-xmpp-trust
- B. xmpp-fed-trust
- C. cup-trust
- D. tomcat-trust
- E. xmpp-trust

Answer: AD

NEW QUESTION 97

An engineer is working on a cisco unity Express system and notices that users that exist on the integrated cisco UCME are missing from Cisco Unity Express. Which two actions using the GUI resolve this discrepancy? (Choose two)

- A. Use the Synchronize task under the User ID field.
- B. Use the Synchronize System under MWI
- C. Use the Synchronize Information under Administration
- D. Import the users using a CSV file.
- E. Add the missing users manually to Cisco Unity Express

Answer: BE

NEW QUESTION 99

An engineer must configure a test user mailbox in a newly deployed Cisco Unity Express module. Which console command set reflects the correct configuration in this scenario?

- A.

```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- B.

```
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- C.

```
username testuser phonenumber 4001
username testuser pin 12345
voicemail mailbox owner testuser
```
- D.

```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001 testuser@labdomain.com
voicemail mailbox create testuser
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 102

An engineer is importing users into Cisco Unity Connection using AXL and discovers that some users are not listed in the import view. Which action should be taken to resolve this issue?

- A. Configure the user primary extension to their directory number.
- B. Configure the user digest credentials to match the user password.
- C. Configure the user access control group assignment to Standard CTI Enabled.
- D. Configure the username and password in LDAP.

Answer: A

NEW QUESTION 105

Which dial-peer configuration routes calls from SIP-based phones on Cisco Unified Communications Manager Express to Cisco Unity Express?

- A. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g711alaw
- B. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec ilbc
- C. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g711ulaw
- D. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g729r6

Answer: C

NEW QUESTION 110

An engineer is configuring a customer's environment for Jabber user over mobile and remote access. The customer's internal domain. Which Jabber parameter

defines the external service discovery domain statistically?

- A. UPN discovery enabled
- B. exclude services
- C. services domain
- D. voice services domain

Answer: B

NEW QUESTION 112


An administrator is troubleshooting an Issue with Cisco Unity Connection. When outside callers interact with the Auto-Attendant, the callers cannot reach the operator when they press '0'. However, the callers can leave messages for users when they get a user's mailbox. Internal callers to the Auto-Attendant are experiencing the same issue. Which two areas should the administrator verify that Cisco Unity Connection is receiving the callers' keypresses? (Choose two.)

- A. Cisco Unity Connection Media (Wave) Traces
- B. Cisco Unity Connection Remote Port Status Monitor
- C. Cisco Unity Connection Packet Capture
- D. Cisco UCM CallManager Traces
- E. Cisco UCM CDR Records

Answer: CD

NEW QUESTION 113

Refer to the exhibit.

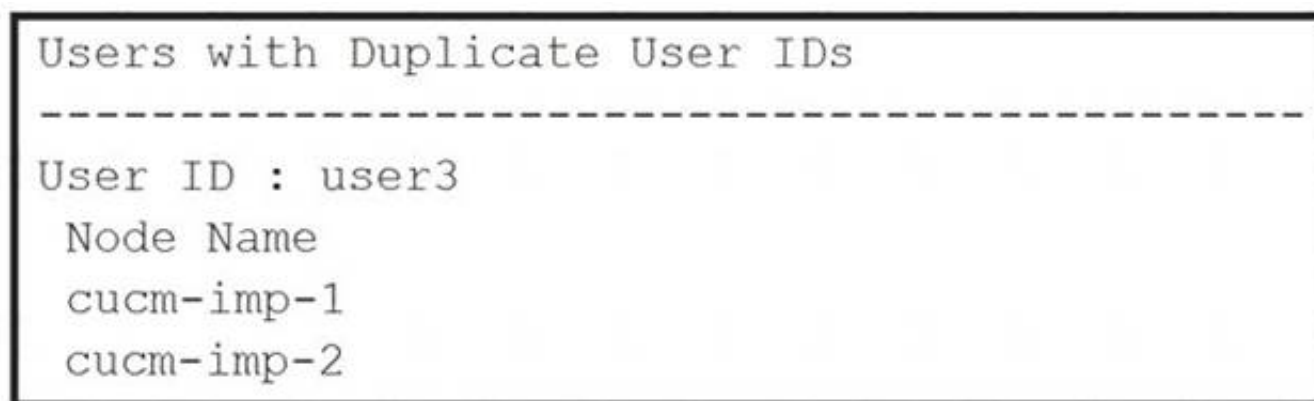

Which two steps resolve the “Users with Duplicate User IDs” message? (Choose two.)

- A. Rename the directory URI value for one of the users to ensure that there is no duplication.
- B. Rename the User ID value for one user if different users on different clusters have the same User ID assigned.
- C. Unassign a user from one of the clusters when the same user is assigned to two different clusters.
- D. Assign the duplicate user to the secondary Cisco IM and Presence node.
- E. Delete the user ID for the duplicate user ID.

Answer: BC

NEW QUESTION 114

Refer to the exhibit.



An engineer is troubleshooting an issue with Cisco Jabber for Windows The end-user reports that Cisco Jabber cannot be used to control a Cisco 8841 IP Phone The phone appears in the Jabber client, but there is a red x on the icon for the phone Which end-user option resolves the issue?

- A. Standard CTI Allow Reception of SRTP Key Material
- B. Standard CTI Allow Calling Number Modification
- C. Standard CTI Allow Call Monitoring
- D. Standard CTI Allow Control of Phones Supporting Rollover Mode

Answer: D

NEW QUESTION 117

Refer to the exhibit.



The associated directory number is configured with Call Forward All to voicemail in Cisco UCM. When users call the directory number they hear the opening greeting. Which action should be taken to correct this issue?

- A. Modify the rule to a Forward Routing Rule.
- B. Modify the Calling Number to 3005.
- C. Modify the Dialed Number condition from "Equals" to "In".
- D. Modify the Call Forward All to the voicemail pilot.

Answer: A

NEW QUESTION 119

Refer to the exhibit.



An engineer assists a user who reports that the voicemail notifications show correctly on the desk phone are not available in the jabber client. Which action resolves this issue?

- A. Reset the Jabber client and have the user sign in again
- B. Set the voicemail profile on the user's line on the CSF device.
- C. Configure the voicemail profile on the user's service profile
- D. Ensure that the voicemail server is listed in the user's CTI profile

Answer: C

NEW QUESTION 124

An end user opened a ticket, stating that though he can log in to Jabber for Windows, and presence and chat works, he cannot place phone calls using the desktop client. You investigate the user and find that no phone device is associated with the user account in Cisco Unified Communications Manager. Which device type must you create for this user to enable calling services from the Jabber for Windows desktop client?

- A. Cisco Unified Personal Communicator
- B. Cisco Jabber for Tablet
- C. Cisco Unified Client Services Framework
- D. third-party SIP device (advanced)

Answer: C

Explanation:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_5/CJAB_BK_D00D8CBD_00_deployment-in

NEW QUESTION 126

An engineer must configure open SIP Federation on cisco IM and presence using cisco Expressways with the additional requirement not to allow a specific list of domains and allow all other domains that are not specified. How is this additional requirement met?

- A. Configure default static routes for each blocked domain with an invalid next-hop IP address.
- B. Add a static route for each blocked domain and keep the "Block Route" checkbox checked.
- C. Block the specified SIP domains on the Expressway
- D. Add each allowed domain as a SIP Federated domain.

Answer: C

NEW QUESTION 131

Which HTTP response code does Cisco UCM use to redirect a client to the identity provider for authentication?

- A. 300
- B. 301
- C. 302
- D. 304

Answer: C

NEW QUESTION 132

A network engineer needs to configure high availability on the Cisco IM and presence cluster. After the configuration was completed and tested, the engineer noticed on Cisco UCM that the IM and Presence publisher is in "Failed Over" state. Which set of steps must be taken to resolve this issue?

- A. Cisco UCM Group Configuration > High Availability > click Fallback
- B. BLF Presence Group Configuration > High Availability > select the publisher server > click Restart Services
- C. BLF Presence Group Configuration > High Availability > click Fallback
- D. Presence Redundancy Group Configuration > High Availability > click Fallback

Answer: D

NEW QUESTION 137

Which description of an IdP server is true?

- A. authenticates user credentials
- B. provides user authorization
- C. is an authentication request that is generated by a Cisco Unified Communications application
- D. consists of pieces of security information that are transferred to the service provider for user authentication

Answer: A

Explanation:

SSO uses Security Assertion Markup Language (SAML) to exchange authentication details between an Identity Provider (IdP) and a service provider. The identity provider authenticates user credentials and issues SAML assertions, which are pieces of security information transferred from the identity provider to the service provider for user authentication. Each assertion is an XML document that contains trusted statements about a subject including, for example, username and privileges. SAML assertions are usually digitally signed to ensure their authenticity.

NEW QUESTION 142

A jabber user reports that they receive pop-up windows warning about untrusted certificates when they attempt to log in to jabber without receiving the certificate warnings. Which two actions resolve this issue? (Choose two.)

- A. Add the certificates to the client machine's local certificate store or keychain
- B. Reinstall the Jabber client using the /quiet option
- C. Configure Jabber with the INVALID_CERTIFICATE_BEHAVIOR option set to "RejectAndNotify."
- D. Replace self-signed certificates with certificates signed by a CA
- E. Move the user to a different Presence Redundancy Group

Answer: AD

NEW QUESTION 144

What prevents toll fraud on voicemail ports?

- A. IP address trusted list on the PSTN gateway
- B. CSS
- C. Block OffNet to OffNet Transfer service parameter
- D. FAC

Answer: B

NEW QUESTION 149

Digital networking is configured between two Cisco Unity Connection clusters using an HTTPS connection. Which two objects are replicated between these two clusters? (Choose two.)

- A. partitions and search spaces
- B. user greetings
- C. user templates and user greetings
- D. call handlers
- E. users and their corresponding mailboxes

Answer: AE

NEW QUESTION 152


An engineer is configuring SAML SSO for a Cisco Unified Communications Manager. After completing all required steps, the engineer wants to verify the status. Which CLI command provides the status of SAML SSO?

- A. utils sso status
- B. show sso status
- C. show saml status
- D. utils saml status

Answer: A

NEW QUESTION 156

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

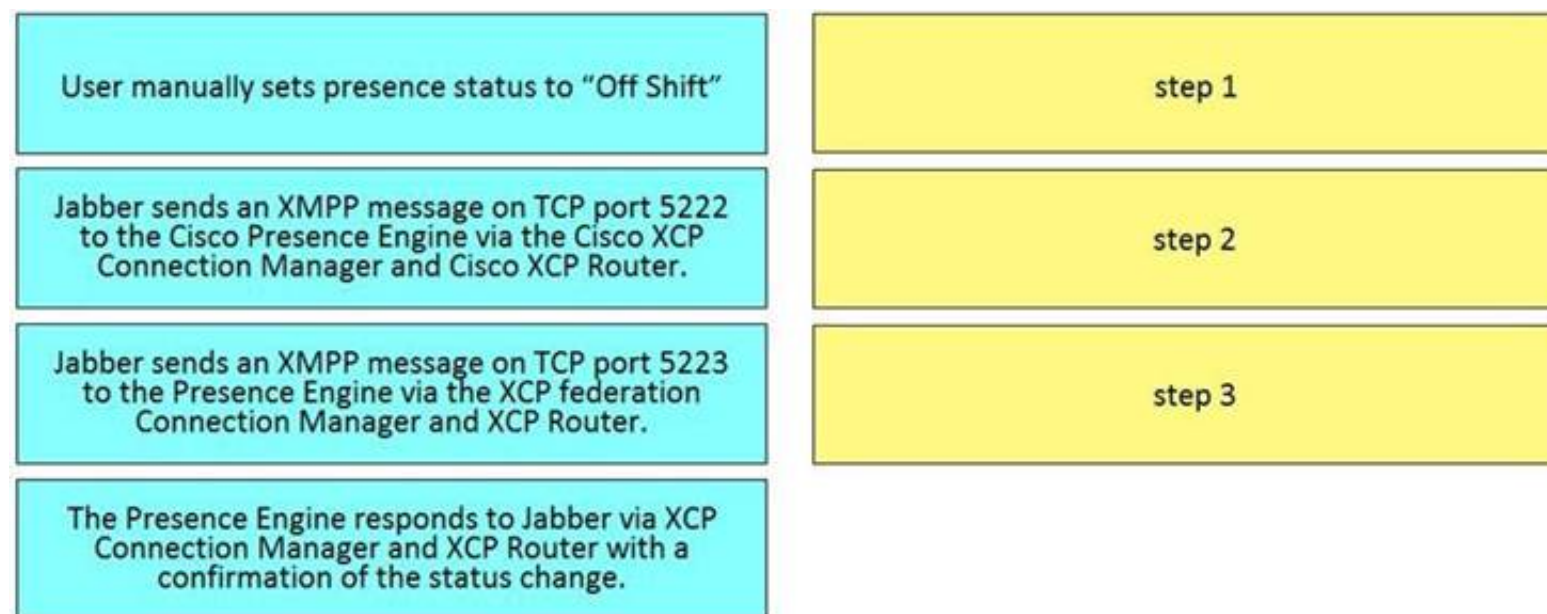

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:


Step 1 – A

Step 2 – B Step 3 - D

<https://www.ciscolive.com/c/dam/r/ciscolive/emea/docs/2019/pdf/BRKUCC-3347.pdf>

NEW QUESTION 158

Refer to the exhibit

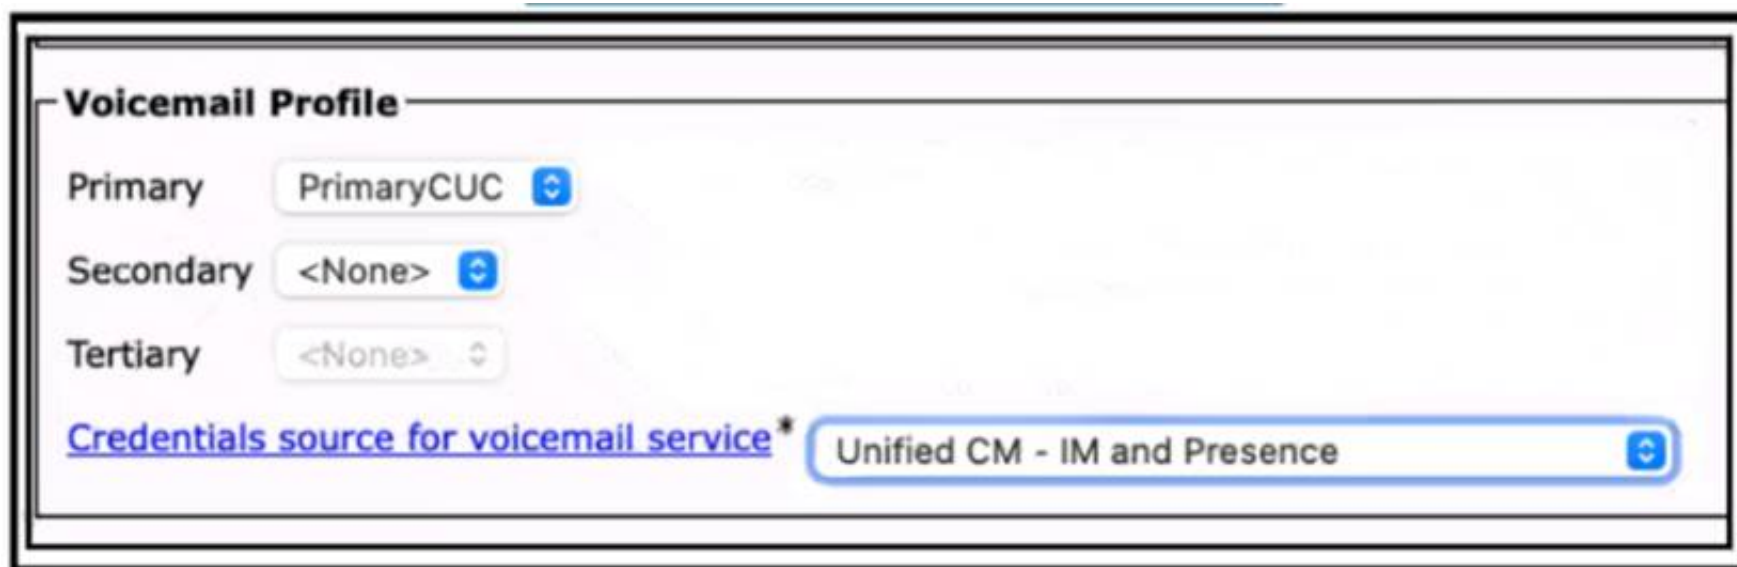

A collaboration engineer is troubleshooting an issue with Cisco Jabber for Windows deployed in phone-only mode. The users are reporting that they cannot access voicemail services via the Cisco Jabber for Windows client on the corporate LAN. Which steps resolve this issue?

- A. Add a secondary voicemail service to Cisco UCM to allow Cisco Jabber users to receive voice messages
 B. Apply the voicemail service to a service profile so that the client can retrieve the settings
 C. Update the jabber-config.xml file with the correct voicemail parameters and restart the appropriate services
 D. Add a primary voicemail service to Cisco UCM to allow Cisco Jabber users to receive voice messages

Answer: D

NEW QUESTION 159

An engineer is assisting a user who is reporting Jabber Presence Issues. Whenever the user is on an active call, Cisco Jabber does not show the user as active when on a call. However, the user can set the presence status manually, and that status shows correctly. Which action resolves the issue?

- A. Assign the user to a different Presence Redundancy Group.
 B. Restart the XCP Router service.
 C. Set the Owner ID on the user's desk phone.
 D. Associate the user to the line on the Directory Number Configuration page.

Answer: D

NEW QUESTION 164

Drag and drop the steps for SAML SSO authentication from the left into the order on the right.

The client attempts to access a resource.	step 1
The client sends an authentication request to an IdP.	step 2
The client sends a signed response to the service provider.	step 3
The IdP authenticates the client by using a signed response.	step 4
The service provider redirects the client to the IdP.	step 5

- A. Mastered
 B. Not Mastered


Answer: A

Explanation:

The client attempts to access a resource.	The client attempts to access a resource.
The client sends an authentication request to an IdP.	The service provider redirects the client to the IdP.
The client sends a signed response to the service provider.	The client sends an authentication request to an IdP.
The IdP authenticates the client by using a signed response.	The IdP authenticates the client by using a signed response.
The service provider redirects the client to the IdP.	The client sends a signed response to the service provider.

NEW QUESTION 166

Refer to the exhibit.

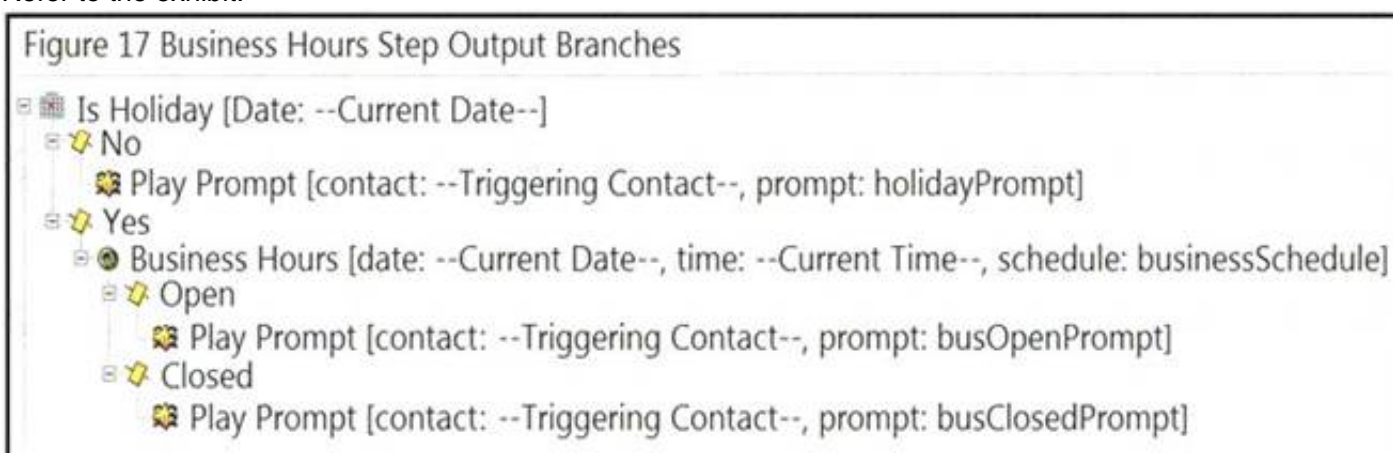

An administrator is configuring the auto-attendant script for a Cisco Unity Express Integration to Cisco UCME and wants to play the “busOpenprompt” wave file when it is not a holiday. How should the script be configured to accomplish this goal?

- A. Check the Business Hours only if the "Is Holiday" prompt returns a "Yes".
 B. Swap me Open and Closed branches in the script.
 C. Check the Business Hours only if the "Is Holiday" prompt returns a "No".
 D. Swap the “busOpenPrompt” with “busclosedPrompt”.

Answer: C

NEW QUESTION 171

Refer to the exhibit.

```
CUE# show ccn application

Name: aa2
Description: aa2
Application type: aa
Script: aa.aef
ID number: 6
Enabled: yes
Maximum number of sessions: 2
allowExternalTransfers: true
busClosedPrompt: AABusinessClosed.wav
businessSchedule: systemschedule
busOpenPrompt: AABusinessOpen.wav
dialByExtnAnytime: false
dialByExtnAnytimeInputLength: 4
dialByFirstName: false
disconnectAfterMenu: false
holidayPrompt: AAHolidayPrompt.wav
MaxRetry: 3
operExtn: 4445
welcomePrompt: AAWelcome.wav

CUE# show ccn trigger

Name: 3334
Type: Cisco SIP Trigger
Application: aa2
Locale: systemDefault
Idle Timeout: 10000
Enabled: yes
Maximum number of sessions: 2

CUE# show ccn prompts

Name: AAWelcome.wav
Language: en_GB
Last Modified Date: Sat Aug 13 17:25:37 EDT 2005
Length in Bytes: 0
```

A collaboration engineer is troubleshooting Cisco Unity Express integrated with Cisco UCME. Internal users and external callers report that calls to the auto-attendant are answered, but that greeting is not being played. Which two actions must the engineer take to resolve the issue? (Choose two.)

- A. Change the trigger number.
- B. Change the welcome prompt setting.
- C. Rerecord AAWelcome.wav.
- D. Increase the number of sessions on the aa2 application.
- E. Change the language setting on the prompt.

Answer: CD

NEW QUESTION 176

A user encounters a problem while checking voicemail, set up in a Cisco UCME and Cisco Unity Express integration. The user reports that when calling the office number from a mobile phone, the call goes to voicemail, but it is then routed to the main menu rather than the voicemail box. The user can check voicemail from an office phone without any issues How is this issue fixed?

- A. Assign the user to the correct user group.
- B. Add the user to Cisco Unity Express.
- C. Configure a primary E.164 number for the user.
- D. Set "Login without PIN" to 'No' for the user.

Answer: B

NEW QUESTION 179

An end user opened a ticket, stating that before logging in to Jabber for Windows, a warning is displayed that a server certificate has expired. Which two certificates must be verified on the Cisco Unified Communications Manager and IM&P deployment? (Choose two.)

- A. capf on Cisco Unified CM
- B. cup-xmpp on IM&P
- C. callmanager on Cisco Unified CM
- D. tomcat on Cisco Unified CM
- E. cup on IM&P


Answer: BD

Explanation:

<https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-presence/116917-technote-certific>

NEW QUESTION 180

Refer to the exhibit.

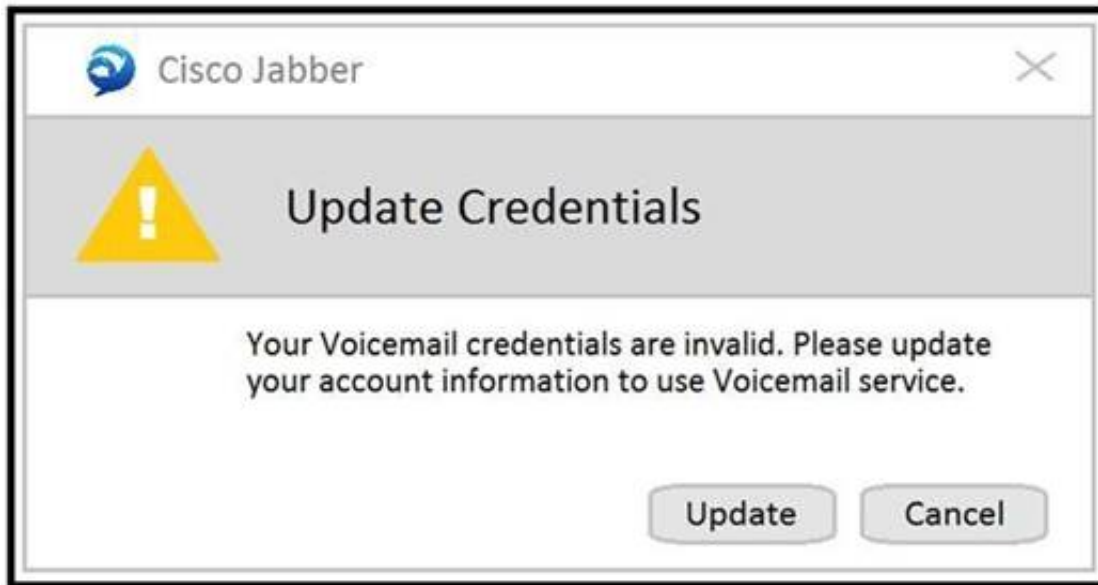

Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

- A. Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.
- B. Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- C. Add CUCM under System Settings > Authz Servers in Cisco Unity.
- D. Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.

Answer: D

NEW QUESTION 185

Which authentication method allows a user to log in to an SSO-enabled Cisco Unified Communications application by utilizing a Microsoft Windows login, thereby not requiring any credentials to be entered?

- A. Smart Card
- B. OAuth
- C. form-based
- D. Kerberos

Answer: D

Explanation:

<https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/118773-configure-kerber> The main advantage of Kerberos authentication compared to the other authentication methods is that you do not need to provide your credentials when you log in to Cisco Jabber. If you use Kerberos, the client does not prompt users for credentials, because authentication was already provided to gain access to the Windows desktop. This authentication method allows you to log in to Cisco Jabber with your Microsoft Windows login.

NEW QUESTION 190

An administrator is setting up the Cisco Unified IM and Presence on-premises high availability feature and wants the Server Recovery Manager to initiate failover after 90 seconds. However, failover is happening after 60 seconds How is this issue corrected?

- A. Change peer Heartbeat Timeout to 90 seconds.
- B. Change Keep Alive (Heartbeat) Interval to 90 seconds
- C. Change critical service delay to 90 seconds.
- D. Change keep Alive (Heartbeat) Timeout to 90 seconds.

Answer: D

NEW QUESTION 192

An engineer deploys Centralized Deployment for Cisco IM and Presence, where central IM and Presence runs version 12.0, and remote Cisco UCM clusters run version 10.5. The engineer checks under System > Centralized Deployment and notes that Status remains UnSynchronized. What are two reasons for this status? (Choose two.)

- A. The Cisco UCM and IM and Presence cluster must be running at least version 11.5 to allow for Centralized Deployment.
- B. The remote Cisco UCM cluster does not support OAuth Refresh Token flow.
- C. This connection must be synchronized from the remote Cisco UCM Administration menu.
- D. The username ana/or password of the application user that was provided for adding remote dusters to the central IM and Presence is incorrect.
- E. The application user that is configured on remote Cisco UCM clusters does not have 'Standard AXL API Access- added.

Answer: BC

NEW QUESTION 197

An engineer is configuring a Cisco Voicemail organization. How many links be configured between two Cisco unity connection Clusters?

- A. One
- B. Two
- C. Three
- D. Four

Answer: A

NEW QUESTION 202

An engineer is configuring XMPP federation on the Cisco IM and Presence server and has changed the security settings to TLS Optional on one node in the cluster. What is the next step in the configuration process?

- A. Start the Cisco DB Replicator
- B. Start the Cisco Replication Watcher.
- C. Restart the Cisco XCP Router.
- D. Restart the Cisco Presence Engine

Answer: C

NEW QUESTION 206

A collaboration engineer troubleshoots an Issue with Cisco IM and Presence federated with Microsoft Skype for Business. A Cisco Jabber user reports being unable to see the presence status of a user on Microsoft Skype for Business when searching for the Microsoft user. Which action resolves this issue?

- A. Disable TLS for the federation.
- B. Configure the federation to use the XMPP protocol.
- C. Add a static route on Cisco IM and Presence to the Skype for Business domain.
- D. Have the Jabber user add the Skype for Business user to the Jabber contact list.

Answer: A

NEW QUESTION 209

How is automatic fallback enabled on a Cisco IM and Presence server?

- A. In IM and Presence Service Parameter Configuration > Cisco Server Recovery Manager, change the Failover parameter to True.
- B. In Communications Manager Service Parameter Configuration > Cisco Server Recovery Manager, change the Enable Automatic Fallback parameter to True.
- C. Automatic fallback is enabled by default.
- D. In the Presence Redundancy Group Configuration > Cisco Unified Communications Manager, check the Enable Automatic Fallback parameter.

Answer: B

NEW QUESTION 214

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-810 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-810 Product From:

<https://www.2passeasy.com/dumps/300-810/>

Money Back Guarantee

300-810 Practice Exam Features:

- * 300-810 Questions and Answers Updated Frequently
- * 300-810 Practice Questions Verified by Expert Senior Certified Staff
- * 300-810 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-810 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year