



VMware

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

NEW QUESTION 1

The Chief Information Security Officer (CISO) for an organization is concerned about the security posture of the operating system images that are used for the provisioning of their Software-as-a-Service (SaaS) applications. The organization is in a growth period. The organization is opening a new data center to launch its next phase of new SaaS-based solutions.

The DevOps team currently creates encrypted virtual machine (VM) templates that are used for various operating systems and adds these to the vSphere inventory. The DevOps team already uses a published content library and has been granted a role with the ability to add and delete library items.

The following requirements have been noted:

- Impacts to the DevOps team's operational processes must be kept to a minimum.
- The DevOps team must be able to regularly check out a copy of the image for updates and check in a new version of the image.
- Images must be synchronized from the primary data center to the new data center.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Clone virtual machines as VM templates to the published content library
- B. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates on-demand
- C. Create a subscription and publish VM templates to a subscribed content library
- D. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates automatically
- E. Clone virtual machines as Open Virtualization Format (OVF) templates to the published content library
- F. Update the role for the DevOps team with new privileges

Answer: BEF

NEW QUESTION 2

An architect is designing a vSphere environment for a customer and learns that the customer has:

- A single vSphere cluster
- Two storage arrays with different RAID capabilities

Which two design decisions should the architect make to maximize data availability and data performance for this customer? (Choose two.)

- A. Use Storage DRS.
- B. Use VMDK anti-affinity rules.
- C. Use multiple datastores for heartbeat.
- D. Use a minimum of three storage arrays.
- E. Use VM to host DRS rules.

Answer: AC

NEW QUESTION 3

An architect is designing a VMware solution for a customer based on the following information:

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing IPv4 based network infrastructure.
- There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 4

An organization's existing vSphere environments are configured for Enhanced Linked Mode. The DevOps team automates the creation of hardened virtual machine images for various operating systems. Their continuous integration/continuous delivery (CI/CD) pipeline runs a task at the end of a successful build, which uploads the Open Virtualization Format (OV) image to a sandbox content library, deploys a virtual machine from the image, and then destroys these objects after quality checks are complete.

The following requirements have been noted:

- All content libraries and images must be centrally created and managed.
- All images must be capable of being updated.
- All images must be refreshed and available to subscribed libraries within 24 hours.
- All images must provide details of the image contents and versions.
- All images must be capable of being reverted to a previous version.
- All images must be capable of having the hardware and guest operating system customized during deployment.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Create a local content library in the primary vSphere environment and enable publishing.
- B. Create and publish a new subscription to a new subscriber library for each target vSphere environment.
- C. Deploy the OVF images to vSphere and clone as an OVF template to a local content library.
- D. Deploy the OVF images to vSphere and clone as a VM template to a local content library.
- E. Edit the Auto Sync Refresh Interval advanced setting for each subscribed library.

F. Add a new subscriber library from each vSphere environment.

Answer: ACF

NEW QUESTION 5

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- > REQ01 The environment has an availability target of 99.5% for all infrastructure.
- > REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- > REQ03 Windows and Linux virtual machines must reside on separate clusters.
- > REQ04 Access to the management cluster within the environment must be controlled. Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Answer: D

NEW QUESTION 6

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 7

Following a recent acquisition, the architect learns that both companies use vSphere on-premise and will need to combine the data centers into one. The acquired company's licenses will not be renewed for cost-savings related to the acquisition. All consumed vSphere licenses must have active support to support line-of-business operations. The merged environment must maintain 25% spare capacity. The architect has a small budget remaining unallocated for hardware. The architect has calculated that the current vSphere environment can absorb the acquired company's virtual machines but the cluster will run at 90% memory utilization and at 50% CPU utilization.

Which design decision can the architect make to incorporate the new company's virtual machines into the combined vSphere environment?


- A. Migrate the acquired company's virtual machines into the vSphere environment as it will currently fit.
- B. Use the current budget to add memory to the cluster to increase each ESXi host's capacity and add the new virtual machines.
- C. Purchase extra hosts to add to the cluster in anticipation of adding the acquired company's virtual machines.
- D. Purchase new licenses for some of the acquired company's ESXi hosts and add them to the cluster to hold the acquired company's virtual machines.

Answer: B

NEW QUESTION 8

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:

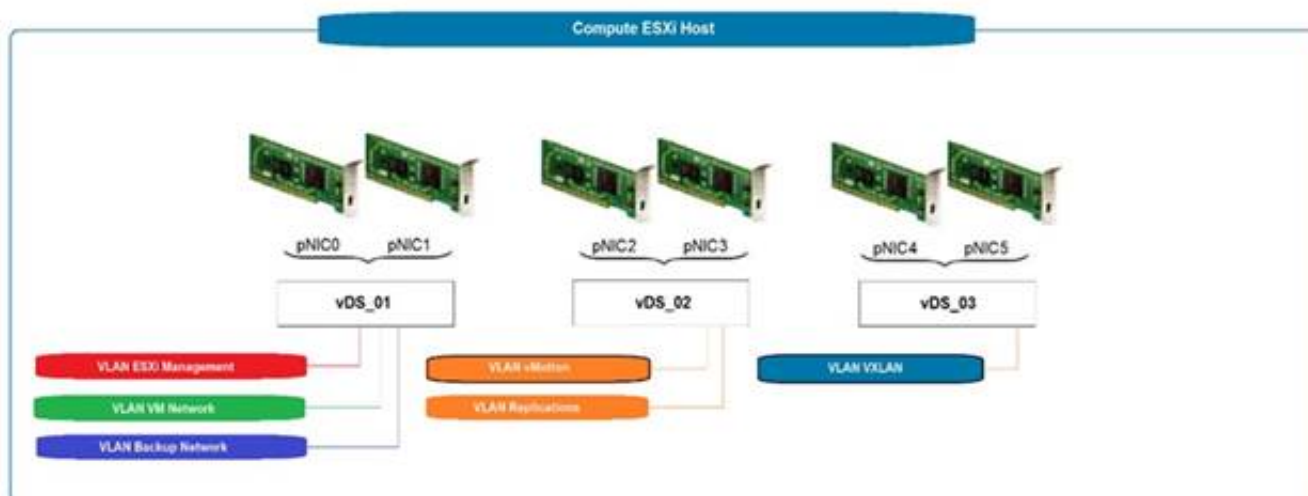

What should the architect recommend for guaranteed throughput for each service?


- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup networkUse explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup networkUse the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS_01Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup networkCreate a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 9

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

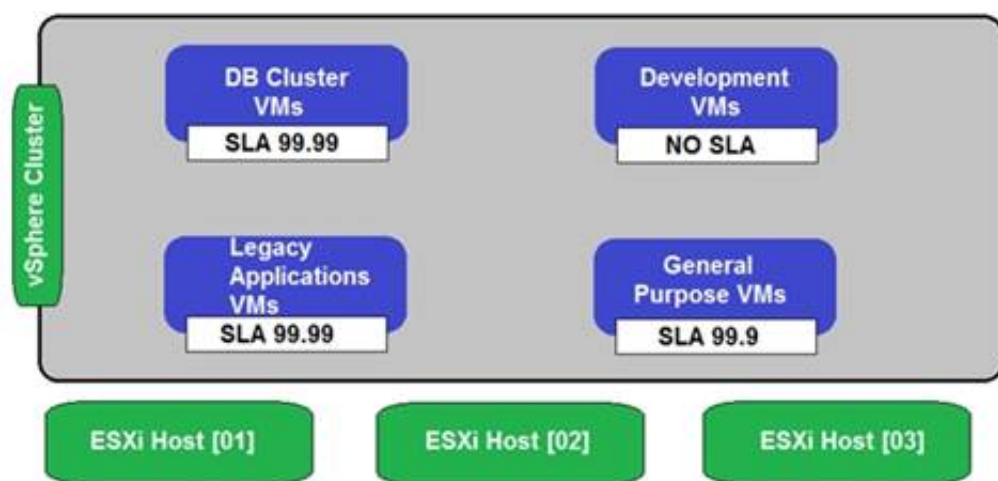

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 10

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- > There is a single four node cluster of ESXi servers
- > There are two, Layer 2, physical network switches connecting resources
- > The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 10

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- > The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- > The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- > The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- > The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- > The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- > All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- > The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

Answer: BE

NEW QUESTION 14

An architect is designing a VMware solution for a customer to meet the following requirements:

- > The solution must use investments in existing storage array that supports both block and file storage.
- > The solution must support the ability to migrate workloads between hosts within a cluster.
- > The solution must support resource management priorities.
- > The solution must support the ability to connect virtual machines directly to LUNs.
- > The solution should use existing 32G fabric infrastructure.
- > There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 18

During a requirements gathering workshop, the customer provides the following information:

- > Each host has 2 × 10 GbE NIC
- > EtherChannel is not currently configured
- > No changes can be made to the physical network
- > Network throughput must be prioritized for defined critical services

Which two recommendations should the architect make with regard to virtual networking? (Choose two.)

- A. Use Route Based on Physical NIC Load.
- B. Use Network I/O Control with Shares.
- C. Use Network I/O Control with Reservation.
- D. Use Link Aggregation Control Protocol (LACP).
- E. Use Network I/O Control with Limits.

Answer: AD

NEW QUESTION 22

A customer provides the following list of requirements for their vSphere platform:

- > REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- > REQ02 The solution should allow logs to be retained for a period of 30 days.
- > REQ03 All user access to the platform should be recorded for audit purposes.
- > REQ04 The solution should allow the management of multiple ESXi hosts.
- > REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 27

The storage team at an organization is planning to migrate from an older Fibre Channel storage environment to a new environment using IP-based storage.

Which two switch features or characteristics are appropriate for IP storage networks? (Choose two.)

- A. Fabric extending devices
- B. Spanning Tree Protocol (STP)
- C. 2:1 or greater bandwidth oversubscription for 10 GbE switches
- D. Non-blocking switch
- E. Deep or ultra buffered switches

Answer: DE

Explanation:

<https://www.arista.com/en/solutions/ip-storage-network-infrastructures>

NEW QUESTION 32

An architect is tasked with planning the design of a new vSphere environment. When commissioned, this environment will be used to migrate an existing set of virtual machines.

An inventory of the existing infrastructure, including configured vCPU, RAM and storage sizes has been provided.

In order for each virtual machine to be migrated, which two data sources with peak and average utilization data are required for sizing? (Choose two.)

- A. %Ready
- B. Disk Write latency
- C. CPU
- D. Ballooned memory
- E. IOPS

Answer: BE

NEW QUESTION 34

An architect is tasked with recommending a solution for a company that is running out of VLANs. Currently the company is running two separate data centers based on vSphere including an Enterprise Plus license. In the first data center, the problem was solved by using VMware NSX and overlay network. In the second data center, there is currently no VMware NSX implementation in place and no budget for additional licenses.

What should the architect recommend as a potential solution to provide support for additional VLANs?

- A. Separate Distributed Virtual Switches (DVS)
- B. Private VLANs (PVLAN)
- C. Virtual Guest Tagging (VGT)
- D. vSwitch VLAN Tagging (VST)

Answer: A

NEW QUESTION 35

There is a request for approved virtual machine applications through a new vSphere platform's integrated automation portal. The platform was built following all provided company security guidelines and has been assessed against Sarbanes-Oxley Act of 2002 (SOX) regulations.

The platform has the following characteristics:

- > vRealize Operations is being used to monitor all clusters.
- > There is a dedicated ESXi cluster, supporting all management services.
- > All network traffic is via distributed virtual switches (DVS). There is a dedicated ESXi cluster for all line-of-business applications.
- > Network traffic is serviced by NSX-T.

There is a dedicated ESXi cluster for virtual desktop infrastructure (VDI).

- > Network traffic is serviced by NSX-T.

The application owner is requesting approval to install a new service that must be protected as per the Payment Card Industry (PCI) Data Security Standard. Which additional non-functional requirement should the architect include in the design to support the new service?

- A. The vSphere hosting platform and all PCI application virtual machines must be assessed against Payment Card Industry (PCI) Data Security Standard compliance.
- B. The vSphere hosting platform and all PCI application virtual machines must be assessed for SOX compliance.
- C. The vSphere hosting platform and all PCI application virtual machine network traffic must be routed via NSX-T.
- D. The vSphere hosting platform and all PCI application virtual machines must be monitored using the vRealize Operations Compliance Pack for Payment Card Industry.

Answer: A

NEW QUESTION 38

An architect is tasked with reviewing the design of a VMware software-defined data center (SDDC) for a software development company. The platform is used to developing applications and services. It is important that the customer be able to accurately benchmark performance of developed applications.

The platform has recently commissioned new hosts to update the development cluster. The development cluster host configuration is:

- > 4 ESXi hosts with 2 sockets x 16 cores
- > 512 GB RAM divided evenly between sockets
- > There is no resource contention

The benchmarking cluster host configuration is:

- > 8 ESXi hosts with 2 sockets x 8 cores
- > 256 GB RAM divided evenly between sockets
- > There is no resource contention

The customer is developing an application that includes a database virtual machine. The application developer states that the database virtual machine performs as required only when allocated 8 vCPUs 256 GB RAM. The database virtual machine performance meets the required levels when run from the development cluster. Performance benchmarking for the database virtual machine yields highly variable results when run from the benchmarking cluster. The application cannot be released without reliable performance benchmarking data.

What is a possible reason for the difference in performance test results between the development and benchmarking clusters?

- A. The database tier breaches a single NUMA node boundary for the benchmarking cluster
- B. The database tier breaches a single NUMA node boundary for the development cluster
- C. The development cluster can support a lower %Ready time per vCPU
- D. The development cluster has more available RAM per host

Answer: C

NEW QUESTION 41

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 42

A customer defines a requirement to minimize the vMotion migration time during a maintenance period. The servers being used are equipped with eight 1 GbE network adapters.

Per the defined logical network configuration, there are two network adapters each used for:

- > Management traffic
- > vMotion traffic
- > iSCSI traffic
- > Virtual machine traffic

Which design decision should the architect make to meet the customer requirement?

- A. Use Network I/O Control to define a reservation for vMotion traffic.
- B. Implement Multi-NIC vMotion by adding additional vMotion VMkernels.
- C. Configure a dedicated TCP/IP stack for vMotion traffic.
- D. Combine vMotion and Management traffic to make use of four adapters.

Answer: A

NEW QUESTION 43

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 44

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 47

Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.
- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Answer: A

NEW QUESTION 48


A new vSphere platform is being created. The platform will host virtual machines that will run management services and line-of-business applications. What should the architect consider when designing the number and type of clusters required?

- A. Maximum tolerable downtime
- B. Predicted platform growth
- C. Auditing requirements for the virtual machines
- D. The level of isolation required between virtual machine classifications

Answer: D

NEW QUESTION 51

Refer to the exhibit.

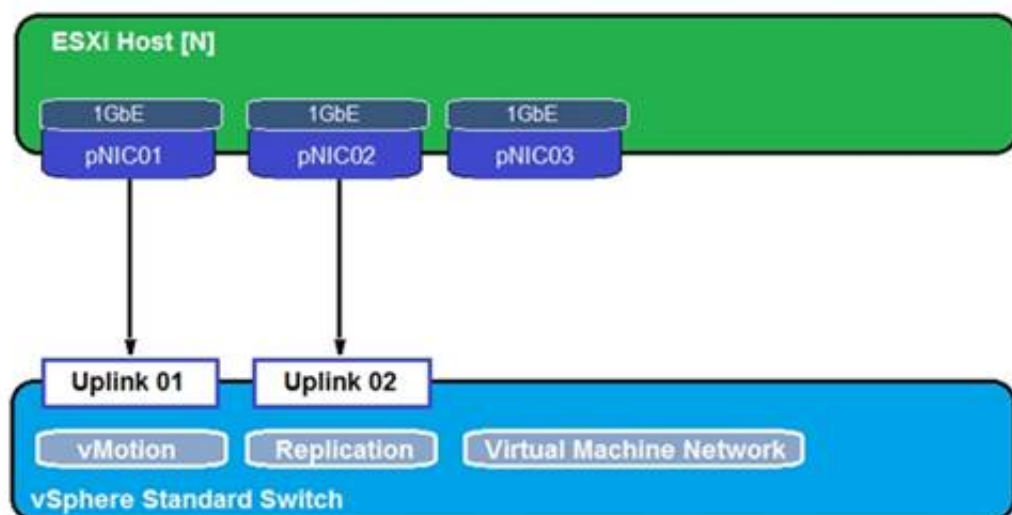

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:
 The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their

challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 54

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).

Their current environment consists of the following components:

- > vSphere 7.0 and vSAN 7.0
- > External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- > 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments.

Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 57

An architect is designing a VMware software-defined data center (SDDC) solution based on the following customer requirements:

- > The solution must initially support 1,000 virtual machines
- > The solution must scale to support the concurrent running of up to 5,000 virtual machines
- > The production environment should be delivered across two data centers
- > The solution should have a maximum tolerable downtime (MTD) of four hours
- > The solution should have a monthly service availability target of 99.8%

Which two assumptions could the architect make based on the information from the customer to help size the solution? (Choose two.)

- A. The number of vSphere hosts in a cluster
- B. The average resource utilization of a virtual machine
- C. The size (CPU/RAM/storage) of the average virtual machine
- D. The guest operating system for each virtual machine
- E. The size (CPU/RAM/storage) of the vSphere hosts

Answer: AE

NEW QUESTION 60

An architect is finalizing the design for a new vCenter Server High Availability deployment. What is one thing the architect must document in the design?

- A. The load balancing algorithm used by the Management Distributed Virtual Switches (DVS)
- B. The SSH configuration settings for the vCenter Server's active node
- C. The vCenter Management Network IPv4 addresses for the witness node vCenter Server
- D. The details of each of the vCenter Server licenses for active, passive and witness nodes

Answer: C

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-9B176C8A-4EEE-4A>

NEW QUESTION 61

An architect has 50 ESXi hosts to deploy and DHCP servers are not allowed on any network. Which automated host deployment method should the architect use?

- A. Stateless vSphere Auto Deploy
- B. Stateful vSphere Auto Deploy
- C. Scripted installation
- D. Interactive installation

Answer: C

NEW QUESTION 62

Which two statements are true about gathering functional business and application requirements? (Choose two.)

- A. It focuses on functional requirements with C-level stakeholders
- B. It leverages a single set of QUESTION NO:s for all stakeholders
- C. It might require multiple rounds of stakeholder interviews
- D. It builds stakeholder consensus

E. It is a non-iterative process

Answer: AC

NEW QUESTION 65

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- 70ms latency between the primary and secondary data centers
- Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 66

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 71

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

3V0-21.23 Practice Exam Features:

- * 3V0-21.23 Questions and Answers Updated Frequently
- * 3V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.23 Practice Test Here](#)