

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

<https://www.2passeasy.com/dumps/3V0-21.23/>



NEW QUESTION 1

The Chief Information Security Officer (CISO) for an organization is concerned about the security posture of the operating system images that are used for the provisioning of their Software-as-a-Service (SaaS) applications. The organization is in a growth period. The organization is opening a new data center to launch its next phase of new SaaS-based solutions.

The DevOps team currently creates encrypted virtual machine (VM) templates that are used for various operating systems and adds these to the vSphere inventory. The DevOps team already uses a published content library and has been granted a role with the ability to add and delete library items.

The following requirements have been noted:

- Impacts to the DevOps team's operational processes must be kept to a minimum.
- The DevOps team must be able to regularly check out a copy of the image for updates and check in a new version of the image.
- Images must be synchronized from the primary data center to the new data center.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Clone virtual machines as VM templates to the published content library
- B. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates on-demand
- C. Create a subscription and publish VM templates to a subscribed content library
- D. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates automatically
- E. Clone virtual machines as Open Virtualization Format (OVF) templates to the published content library
- F. Update the role for the DevOps team with new privileges

Answer: BEF

NEW QUESTION 2

A customer requests a review of its current vSphere platform design.

The following information is noted:

- There are three different workload profiles for the virtual machines:
- Tier-1 virtual machines operate resource-intensive applications and require dedicated allocations for CPU and RAM.
- Tier-2 virtual machines operate internet-facing applications and require access to externally facing networks.
- Tier-3 virtual machines operate platform management tools such as vCenter Server and have different lifecycle management requirements.
- Tier-1, Tier-2 and Tier-3 virtual machines are all hosted on a single large vSphere cluster.
- The Chief Information Security Officer (CISO) has raised concerns that hosting externally facing applications alongside management tools does not meet internal compliance standards.
- The Operations team has raised concerns about Tier-1 virtual machines negatively impacting the performance of vCenter Server.
- The Operations lead has stated that management changes have consistently been rejected by application teams.

As a result of the review, which recommendation should the architect make regarding the design of this platform?

- A. Separate Tier-1, Tier-2 and Tier-3 virtual machines using dedicated distributed virtual switches (DVS)
- B. Separate Tier-2 virtual machines onto a dedicated cluster
- C. Separate Tier-1, Tier-2 and Tier-3 virtual machines onto dedicated clusters
- D. Separate Tier-1, Tier-2 and Tier-3 virtual machines using resource pools and shares

Answer: C

NEW QUESTION 3

An organization's existing vSphere environments are configured for Enhanced Linked Mode. The DevOps team automates the creation of hardened virtual machine images for various operating systems. Their continuous integration/continuous delivery (CI/CD) pipeline runs a task at the end of a successful build, which uploads the Open Virtualization Format (OVF) image to a sandbox content library, deploys a virtual machine from the image, and then destroys these objects after quality checks are complete.

The following requirements have been noted:

- All content libraries and images must be centrally created and managed.
- All images must be capable of being updated.
- All images must be refreshed and available to subscribed libraries within 24 hours.
- All images must provide details of the image contents and versions.
- All images must be capable of being reverted to a previous version.
- All images must be capable of having the hardware and guest operating system customized during deployment.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Create a local content library in the primary vSphere environment and enable publishing.
- B. Create and publish a new subscription to a new subscriber library for each target vSphere environment.
- C. Deploy the OVF images to vSphere and clone as an OVF template to a local content library.
- D. Deploy the OVF images to vSphere and clone as a VM template to a local content library.
- E. Edit the Auto Sync Refresh Interval advanced setting for each subscribed library.
- F. Add a new subscriber library from each vSphere environment.

Answer: ACF

NEW QUESTION 4

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance

D. Use an SSO domain per site

Answer: C

NEW QUESTION 5

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- REQ01 The environment has an availability target of 99.5% for all infrastructure.
- REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- REQ03 Windows and Linux virtual machines must reside on separate clusters.
- REQ04 Access to the management cluster within the environment must be controlled. Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Answer: D

NEW QUESTION 6

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Answer: B

NEW QUESTION 7

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 8

During a requirements gathering workshop, the customer's Chief Information Security Office (CISO) provides the following requirements that are pertinent to the design of a new vSphere environment:

- All operating system critical patches must be installed within 24 hours of release.
- All virtual machine templates must be updated every three months in line with company policy.

Which requirement classification is being gathered for the design documentation?

- A. Security
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

Explanation:

This is lifecycle management function. The requirement is system critical patches, not system security patches.

NEW QUESTION 9

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 10

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7.

The architect wants the backup solution to perform the following:

- Full virtual machine image backup and restore
- Incremental virtual machine image backup and restore
- File level backup and restore within both Windows and Linux virtual machines
- LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 10

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers.

The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated.

Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 15

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

Answer: BE

NEW QUESTION 19

An architect is designing storage for a new vSphere environment to meet the following requirements: ➤ Asynchronous replication is required between two sites.

- The impact on the storage layer should not impact the performance of the compute layer.
- Each application tier will require different replication attributes.
- Virtual machine live migration across compute and storage must be supported.
- Virtual machine aware back up will be leveraged.
- Operational management overhead should be minimized.
- Operational automation should be supported.

Which storage design recommendations would meet the requirements?

- A. Two new Fibre Channel storage arrays will be deployed, one at either site. Each application tier will be initially provisioned a new LU
- B. Data replication will be offloaded to the new arrays.
- C. Two new vSphere clusters enabled with vSAN will be deployed, one at either sit
- D. vSAN will be used to provide policy-based management for each application tier. vSphere Replication will be used to replicate the virtual machine data in an asynchronous configuration.
- E. Two new iSCSI storage arrays will be deployed, one at either site. Each application tier will be initially provisioned a new LU
- F. Data replication will be offloaded to the new arrays.
- G. Two new storage arrays will be deployed, one at either site. vSphere Volumes (vVOLS) will be used to provide policy-based management for each application tie
- H. Data replication will be offloaded to the new arrays.

Answer: B

NEW QUESTION 20

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 25

During a requirements gathering workshop, the customer provides the following requirement that is pertinent to the design of a new vSphere environment:

- The Maximum Tolerable Downtime (MTD) for all Tier 1 applications is one hour. Which requirement classification is being gathered for the design documentation?

- A. Manageability
- B. Performance
- C. Availability
- D. Recoverability

Answer: C

NEW QUESTION 26

An architect is designing a solution for an environment with two types of resource profiles that must be virtualized. The first type consists of Tier 1 virtual machines that are disk I/O intensive, but do NOT require high CPU or memory. The second type consists of Tier 2 virtual machines that require a lower CPU and memory allocation and have minimal disk I/O.

Which design recommendation should the architect make for distributing the resource profiles?

- A. Separate the two resource profiles into two cluster
- B. The Tier 1 cluster will have fast storage while the Tier 2 cluster will not.
- C. Run both resource profiles on the same cluster with the same host hardware platform.
- D. Separate the two resource profiles into two cluster
- E. The Tier 2 cluster will have faster CPU and more memory while the Tier 1 cluster will have slower CPU and less memory but more disk space.
- F. Run both resource profiles on the same cluster with host hardware that has fast CPU, large amounts of memory, and the fastest storage platform.

Answer: D

NEW QUESTION 29

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 34

Following a recent acquisition, an architect needs to merge IT assets into its current data center. The combined vSphere environment will need to run the newly acquired company's virtual machines.

Network integration work has already been completed and the current environment has capacity to host all virtual machines. The Operations team needs to identify which virtual machines belong to the acquired company and report on their usage.

How should the architect merge the company's assets and virtual machines?

- A. Leave the newly acquired company's assets in its current place
- B. Lift and shift the acquired assets into the data center
- C. Migrate the acquired company's virtual machines into the existing vSphere environment
- D. Migrate and apply vSphere tags to the acquired company's virtual machines

Answer: D

NEW QUESTION 36

An architect is designing a new VMware software-defined data center (SDDC) that will consist of 100 branch sites connected to a single VMware vCenter Server within the primary data center. To allow for the use of existing automation scripts, there is a requirement to replicate the names of the virtual distributed port groups across all sites. The procurement team purchases licensing and there is no further budget allocated. Which design decision should the architect make to meet this requirement?

- A. A new vCenter Server will be deployed for each branch site
- B. A new host and cluster folder will be created for each branch site
- C. The automation script will be updated to reflect unique naming for each site
- D. A new virtual data center will be created for each branch site

Answer: B

NEW QUESTION 40

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 43

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 48

A customer has a database cluster with 40/60 read/write ratio and a high IOPs requirement with no contention on an all-flash vSAN cluster. Which two storage settings should be configured for best performance? (Choose two.)

- A. IOPs limits enabled
- B. RAID 1
- C. Deduplication and Compression disabled
- D. RAID 5/6
- E. Deduplication and Compression enabled

Answer: AB

NEW QUESTION 49

There is a request for approved virtual machine applications through a new vSphere platform's integrated automation portal. The platform was built following all provided company security guidelines and has been assessed against Sarbanes-Oxley Act of 2002 (SOX) regulations.

The platform has the following characteristics:

- vRealize Operations is being used to monitor all clusters.
- There is a dedicated ESXi cluster, supporting all management services.
- All network traffic is via distributed virtual switches (DVS). There is a dedicated ESXi cluster for all line-of-business applications.
- Network traffic is serviced by NSX-T.

There is a dedicated ESXi cluster for virtual desktop infrastructure (VDI).

- Network traffic is serviced by NSX-T.

The application owner is requesting approval to install a new service that must be protected as per the Payment Card Industry (PCI) Data Security Standard.

Which additional non-functional requirement should the architect include in the design to support the new service?

- A. The vSphere hosting platform and all PCI application virtual machines must be assessed against Payment Card Industry (PCI) Data Security Standard compliance.
- B. The vSphere hosting platform and all PCI application virtual machines must be assessed for SOX compliance.
- C. The vSphere hosting platform and all PCI application virtual machine network traffic must be routed via NSX-T.
- D. The vSphere hosting platform and all PCI application virtual machines must be monitored using the vRealize Operations Compliance Pack for Payment Card Industry.

Answer: A

NEW QUESTION 53

An architect is creating a network design for a new vSphere environment.

Based on customer requirements, the environment must support the following types of traffic:

- > Management
- > vMotion
- > vSAN
- > Fault Tolerance
- > Virtual machine traffic, which cannot be impacted by other types of traffic

Which design recommendation can the architect make for a resilient infrastructure with vSphere network service tiering?


- A. Use different logical networks to ensure traffic is isolated with separate VLANs
- B. Use Network I/O Control and ensure appropriate share value is defined for different types of traffic giving priority to the virtual machines traffic
- C. Use two dedicated virtual switches with a single adapter each, dedicating one virtual switch for Management, vMotion, vSAN and Fault Tolerance traffic, and the second one for virtual machine traffic
- D. Use a NIC teaming policy based on the physical NIC load

Answer: A

NEW QUESTION 55

Refer to the exhibit.

During a requirements gathering workshop, the customer shares the following diagram regarding their availability service-level agreements (SLAs):

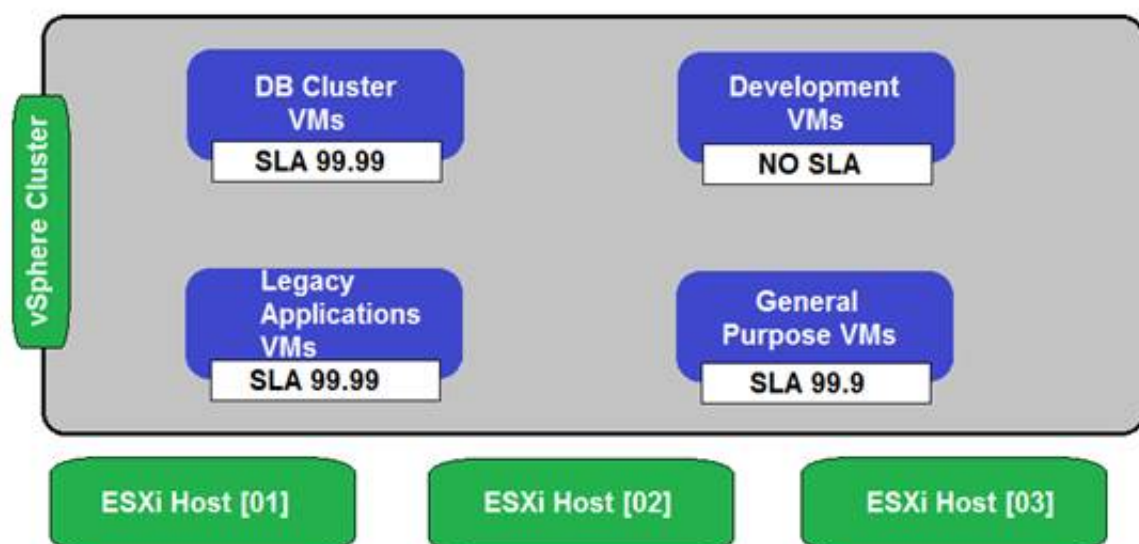

The customer wants database application level availability to always take precedence. What should the architect recommend to meet the customer's requirement?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Highest.
- B. Enable Fault Tolerance.
- C. Enable Sphere HA and maintain the default settings.
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest.

Answer: D

NEW QUESTION 57

An architect is designing a new vSphere cluster. The requirement is to provide a total of 96 CPU cores and 1.5 TB RAM across all hosts.

The following information has been provided:

Two different physical hardware profiles are available for the ESXi hosts in the cluster.

-Profile 1: 16 CPU cores and 256 GB RAM

-Profile 2: 32 CPU cores and 512 GB RAM

Profile 2 is twice as expensive to purchase as Profile 1.

Which two aspects should the architect consider when selecting the hardware profile? (Choose two.)

- A. The manufacturer and model of the CPUs in the hosts
- B. The amount of capacity available for failover of virtual machines within the cluster
- C. The downtime allowed for virtual machines that will be running within the cluster
- D. The cost to procure and maintain the hardware
- E. The number of virtual machines that will be running within the cluster

Answer: BE

NEW QUESTION 59

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 61

An architect is designing a vSphere environment for a customer based on the following information:

- The vSphere cluster will have three hosts only due to budget considerations.
- A database cluster (node majority) consisting of three virtual machines will be running on the vSphere cluster.

Which two recommendations can the architect make so that the customer achieves the highest level of application availability while taking into consideration operational resiliency? (Choose two.)

- A. Create VM-VM anti-affinity rules
- B. Set das.respectvmvmantiaffinityrules to false
- C. Create VM-Host anti-affinity rules
- D. Disable vSphere HA during maintenance
- E. Set das.ignoreinsufficienthbdastore to true

Answer: BC

NEW QUESTION 66

During a requirements gathering workshop to design a physical to virtual migration, the customer provides the following information:

- There is no physical firewall in the data center with no anticipated plans for a future network refresh.
- Leveraging the virtual infrastructure to mitigate the lack of network security must be addressed in the design.
- All physical servers to be migrated exist on the same VLAN.

Which recommendation should the architect make to address the customer requirement with regard to virtual networking?

- A. Split the virtual machines into several VLANs Use tag actions
- B. Create port groups with different names and same VLAN IDs Enable traffic shaping for ingress and egress traffic
- C. Enable traffic filtering and marking Use allow or drop actions
- D. Disable traffic filtering and marking Use tag actions

Answer: A

NEW QUESTION 69

As part of a new hybrid cloud initiative for a large financial company, the customer technical team is presenting an overview of the current state of the infrastructure and their vision for a new solution.

The project team captures notes during the presentation and adds them to the discovery documentation. Which of the listed statements is a design constraint?

- A. The applications are created in-house with in-guest recovery protection
- B. The maximum tolerable data loss is 10 minutes
- C. The two data center locations have a network latency of 8 ms round-trip time (RTT)
- D. The existing storage is out of maintenance

Answer: D

NEW QUESTION 70

An architect is tasked with expanding an existing VMware software-defined data center (SDDC) solution so that it can be used to deliver a virtual desktop infrastructure (VDI) service off-shore development activities.

The production environment is currently delivered across two geographically dispersed data centers. The two data centers are currently connected to each other through multiple diversely routed, high bandwidth and low latency links. The current operations management components are deployed to a dedicated management cluster that is configured with N+1 redundancy. The current VMware software-defined data center (SDDC) has a monthly availability target of 99.5%, which includes all management components.

The customer requires that the new solution scale to support the concurrent running of 500 persistent virtual desktops. The virtual desktops must not share the same virtual infrastructure as existing virtual machines, but can be managed using the same VMware operations management components. Any new VDI service management components must be installed into the management cluster. There is no requirement to back up the virtual desktops because all relevant user data is stored centrally. The VDI service is providing business critical services and must have an availability target of 99.9%.

Given the information from the customer, which two assumptions would the architect include in the design? (Choose two.)

- A. The existing virtual infrastructure has sufficient capacity to host the new VDI workloads
- B. The existing operations monitoring tools have sufficient capacity to monitor the new VDI services
- C. The existing management cluster has enough available capacity to host any VDI service management component
- D. The management cluster has N+1 redundancy
- E. The VDI service has a higher service-level agreement (SLA) than the operations management SLA

Answer: BD

NEW QUESTION 72

Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.
- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Answer: A

NEW QUESTION 75

An architect is designing a series of new vSphere environments for an organization. The environments will be deployed in their US-East and US-West region data centers. Each data center may have one or more dedicated vSphere environments. Only the vSphere environments within a data center will be configured with Enhanced Linked Mode. The Chief Technology Officer (CTO) has authorized the use of VMware vRealize Automation Cloud for automation. The build team

creates standardized virtual machine images for various operating systems in Open Virtualization Format (OVF) and publishes the latest version on an as-needed basis to an internal HTTPS-accessible repository.

The architect must design a content library topology that meets the following requirements:

- > A localized content library must be available in each data center.
- > Each content library must be updated when an image is updated and released by the build team.
- > It must leverage the existing build team processes.

What should the architect recommend to meet the requirements?

- A. Work with the build team to create a local content library for each vSphere environment. Import the OVF images when new image are published to the repository.
- B. Create a local content library for the primary vSphere environment in each data center. Create a subscribed content library for each additional vSphere environment in each data center.
- C. Configure the content library to download content automatically.
- D. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- E. Configure the content library to download content when needed.
- F. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- G. Configure the content library to download content automatically.

Answer: B

NEW QUESTION 77

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space.


Which solution meets the customer requirements?

- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups
- D. Array-based encryption

Answer: D

NEW QUESTION 78

Refer to the exhibit.

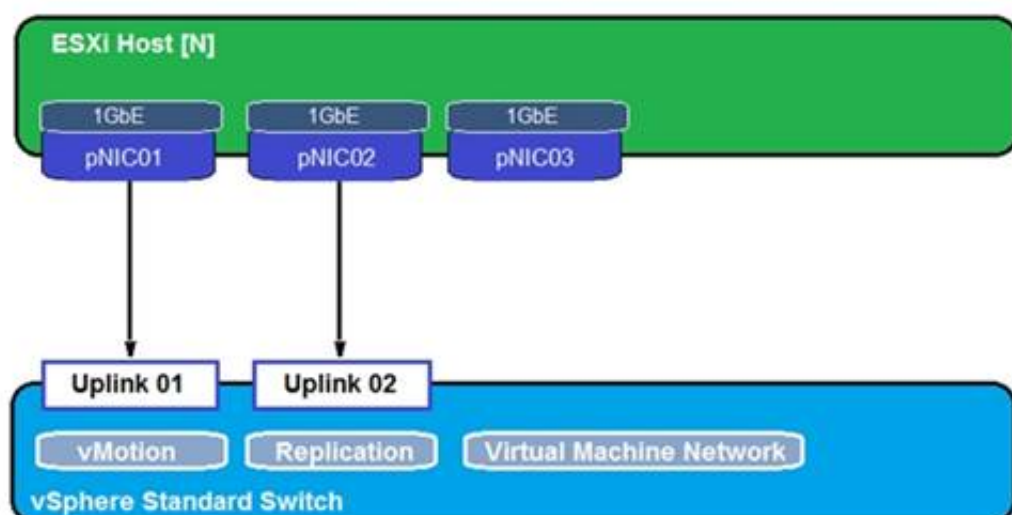

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:

The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 83

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).

Their current environment consists of the following components:

- > vSphere 7.0 and vSAN 7.0
- > External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- > 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments.

Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk

- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 87

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- > Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- > 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- > 70ms latency between the primary and secondary data centers
- > Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 90

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 91

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 3V0-21.23 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 3V0-21.23 Product From:

<https://www.2passeasy.com/dumps/3V0-21.23/>

Money Back Guarantee

3V0-21.23 Practice Exam Features:

- * 3V0-21.23 Questions and Answers Updated Frequently
- * 3V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year