

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x

<https://www.2passeasy.com/dumps/3V0-21.21/>



NEW QUESTION 1

A customer requests a review of its current vSphere platform design.

The following information is noted:

- There are three different workload profiles for the virtual machines:
- Tier-1 virtual machines operate resource-intensive applications and require dedicated allocations for CPU and RAM.
- Tier-2 virtual machines operate internet-facing applications and require access to externally facing networks.
- Tier-3 virtual machines operate platform management tools such as vCenter Server and have different lifecycle management requirements.
- Tier-1, Tier-2 and Tier-3 virtual machines are all hosted on a single large vSphere cluster.
- The Chief Information Security Officer (CISO) has raised concerns that hosting externally facing applications alongside management tools does not meet internal compliance standards.
- The Operations team has raised concerns about Tier-1 virtual machines negatively impacting the performance of vCenter Server.
- The Operations lead has stated that management changes have consistently been rejected by application teams.

As a result of the review, which recommendation should the architect make regarding the design of this platform?

- A. Separate Tier-1, Tier-2 and Tier-3 virtual machines using dedicated distributed virtual switches (DVS)
- B. Separate Tier-2 virtual machines onto a dedicated cluster
- C. Separate Tier-1, Tier-2 and Tier-3 virtual machines onto dedicated clusters
- D. Separate Tier-1, Tier-2 and Tier-3 virtual machines using resource pools and shares

Answer: C

NEW QUESTION 2

An organization's existing vSphere environments are configured for Enhanced Linked Mode. The DevOps team automates the creation of hardened virtual machine images for various operating systems. Their continuous integration/continuous delivery (CI/CD) pipeline runs a task at the end of a successful build, which uploads the Open Virtualization Format (OVF) image to a sandbox content library, deploys a virtual machine from the image, and then destroys these objects after quality checks are complete.

The following requirements have been noted:

- All content libraries and images must be centrally created and managed.
- All images must be capable of being updated.
- All images must be refreshed and available to subscribed libraries within 24 hours.
- All images must provide details of the image contents and versions.
- All images must be capable of being reverted to a previous version.
- All images must be capable of having the hardware and guest operating system customized during deployment.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Create a local content library in the primary vSphere environment and enable publishing.
- B. Create and publish a new subscription to a new subscriber library for each target vSphere environment.
- C. Deploy the OVF images to vSphere and clone as an OVF template to a local content library.
- D. Deploy the OVF images to vSphere and clone as a VM template to a local content library.
- E. Edit the Auto Sync Refresh Interval advanced setting for each subscribed library.
- F. Add a new subscriber library from each vSphere environment.

Answer: ACF

NEW QUESTION 3

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- REQ01 The environment has an availability target of 99.5% for all infrastructure.
- REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- REQ03 Windows and Linux virtual machines must reside on separate clusters.
- REQ04 Access to the management cluster within the environment must be controlled. Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Answer: D

NEW QUESTION 4

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 5

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 6

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:



What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup network Use explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 7

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 8

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- > Full virtual machine image backup and restore
- > Incremental virtual machine image backup and restore
- > File level backup and restore within both Windows and Linux virtual machines
- > LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 9

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers. The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated. Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 10

A Cloud Service Provider wants to introduce backup as a service for a customer's vSphere-based virtual machines. The following information is noted:

- All top-of-rack (ToR) switches are 10 GbE and fully populated
- The backup traffic must not impact existing services

Which two recommendations should the architect make to help the customer incorporate the service? (Choose two.)

- A. Enable and tag traffic on the backup distributed port group
- B. Add a new two-port 10 GbE NIC per ESXi host
- C. Replace the existing NIC with a two-port 25 GbE NIC per ESXi host
- D. Match the Class of Service (CoS) and Differentiated Services Code Point (DSCP) values to the physical network
- E. Create a new virtual switch using the 1 GbE uplinks

Answer: AB

NEW QUESTION 10

An architect is designing storage for a new vSphere environment to meet the following requirements: ➤ Asynchronous replication is required between two sites.

- The impact on the storage layer should not impact the performance of the compute layer.
- Each application tier will require different replication attributes.
- Virtual machine live migration across compute and storage must be supported.
- Virtual machine aware back up will be leveraged.
- Operational management overhead should be minimized.
- Operational automation should be supported.

Which storage design recommendations would meet the requirements?

- A. Two new Fibre Channel storage arrays will be deployed, one at either site. Each application tier will be initially provisioned a new LU
- B. Data replication will be offloaded to the new arrays.
- C. Two new vSphere clusters enabled with vSAN will be deployed, one at either site
- D. vSAN will be used to provide policy-based management for each application tier. vSphere Replication will be used to replicate the virtual machine data in an asynchronous configuration.
- E. Two new iSCSI storage arrays will be deployed, one at either site. Each application tier will be initially provisioned a new LU
- F. Data replication will be offloaded to the new arrays.
- G. Two new storage arrays will be deployed, one at either site. vSphere Volumes (vVOLS) will be used to provide policy-based management for each application tier
- H. Data replication will be offloaded to the new arrays.

Answer: B

NEW QUESTION 12

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 17

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC). During the discovery phase, the following information is documented:

Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled

Cluster Two

- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled

Cluster Three

- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure if resources are available
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques can be used
- Virtual machines should be protected from any host hardware failures
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: BD

NEW QUESTION 21

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- Create a shared SSO domain for each physical site.
- Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- Create a shared SSO domain across all physical sites.
- Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 22

An architect is designing a solution for an environment with two types of resource profiles that must be virtualized. The first type consists of Tier 1 virtual machines that are disk I/O intensive, but do NOT require high CPU or memory. The second type consists of Tier 2 virtual machines that require a lower CPU and memory allocation and have minimal disk I/O.

Which design recommendation should the architect make for distributing the resource profiles?

- Separate the two resource profiles into two cluster
- The Tier 1 cluster will have fast storage while the Tier 2 cluster will not.
- Run both resource profiles on the same cluster with the same host hardware platform.
- Separate the two resource profiles into two cluster
- The Tier 2 cluster will have faster CPU and more memory while the Tier 1 cluster will have slower CPU and less memory but more disk space.

F. Run both resource profiles on the same cluster with host hardware that has fast CPU, large amounts of memory, and the fastest storage platform.

Answer: D

NEW QUESTION 24

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 29

A architect is designing a new VMware software-defined data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each site
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 31

Following a recent acquisition, an architect needs to merge IT assets into its current data center. The combined vSphere environment will need to run the newly acquired company's virtual machines.

Network integration work has already been completed and the current environment has capacity to host all virtual machines. The Operations team needs to identify which virtual machines belong to the acquired company and report on their usage.

How should the architect merge the company's assets and virtual machines?

- A. Leave the newly acquired company's assets in its current place
- B. Lift and shift the acquired assets into the data center
- C. Migrate the acquired company's virtual machines into the existing vSphere environment
- D. Migrate and apply vSphere tags to the acquired company's virtual machines

Answer: D

NEW QUESTION 35

An architect is tasked with recommending a solution for a company that is running out of VLANs. Currently the company is running two separate data centers based on vSphere including an Enterprise Plus license. In the first data center, the problem was solved by using VMware NSX and overlay network. In the second data center, there is currently no VMware NSX implementation in place and no budget for additional licenses.

What should the architect recommend as a potential solution to provide support for additional VLANs?

- A. Separate Distributed Virtual Switches (DVS)
- B. Private VLANs (PVLAN)
- C. Virtual Guest Tagging (VGT)
- D. vSwitch VLAN Tagging (VST)

Answer: A

NEW QUESTION 36

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive

HA plugin

- B. Configure vSphere HASEt das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 38

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 39

An architect is creating a network design for a new vSphere environment.

Based on customer requirements, the environment must support the following types of traffic:

- > Management
- > vMotion
- > vSAN
- > Fault Tolerance
- > Virtual machine traffic, which cannot be impacted by other types of traffic

Which design recommendation can the architect make for a resilient infrastructure with vSphere network service tiering?

- A. Use different logical networks to ensure traffic is isolated with separate VLANs
- B. Use Network I/O Control and ensure appropriate share value is defined for different types of traffic giving priority to the virtual machines traffic
- C. Use two dedicated virtual switches with a single adapter each, dedicating one virtual switch for Management, vMotion, vSAN and Fault Tolerance traffic, and the second one for virtual machine traffic
- D. Use a NIC teaming policy based on the physical NIC load

Answer: A

NEW QUESTION 44

An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture.

During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s.

What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?

- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

Answer: C

NEW QUESTION 47

An architect is designing a new vSphere cluster. The requirement is to provide a total of 96 CPU cores and 1.5 TB RAM across all hosts.

The following information has been provided:

Two different physical hardware profiles are available for the ESXi hosts in the cluster.

-Profile 1: 16 CPU cores and 256 GB RAM

-Profile 2: 32 CPU cores and 512 GB RAM

Profile 2 is twice as expensive to purchase as Profile 1.

Which two aspects should the architect consider when selecting the hardware profile? (Choose two.)

- A. The manufacturer and model of the CPUs in the hosts
- B. The amount of capacity available for failover of virtual machines within the cluster
- C. The downtime allowed for virtual machines that will be running within the cluster
- D. The cost to procure and maintain the hardware
- E. The number of virtual machines that will be running within the cluster

Answer: BE

NEW QUESTION 51

A customer defines a requirement to minimize the vMotion migration time during a maintenance period. The servers being used are equipped with eight 1 GbE network adapters.

Per the defined logical network configuration, there are two network adapters each used for:

- > Management traffic
- > vMotion traffic
- > iSCSI traffic
- > Virtual machine traffic

Which design decision should the architect make to meet the customer requirement?

- A. Use Network I/O Control to define a reservation for vMotion traffic.
- B. Implement Multi-NIC vMotion by adding additional vMotion VMkernels.
- C. Configure a dedicated TCP/IP stack for vMotion traffic.
- D. Combine vMotion and Management traffic to make use of four adapters.

Answer: A

NEW QUESTION 52

During a requirements gathering workshop to design a physical to virtual migration, the customer provides the following information:

- There is no physical firewall in the data center with no anticipated plans for a future network refresh.
- Leveraging the virtual infrastructure to mitigate the lack of network security must be addressed in the design.
- All physical servers to be migrated exist on the same VLAN.

Which recommendation should the architect make to address the customer requirement with regard to virtual networking?

- A. Split the virtual machines into several VLANs Use tag actions
- B. Create port groups with different names and same VLAN IDs Enable traffic shaping for ingress and egress traffic
- C. Enable traffic filtering and marking Use allow or drop actions
- D. Disable traffic filtering and marking Use tag actions

Answer: A

NEW QUESTION 55

A new real-time financial service application is being developed by the engineering team at a financial firm and will be released as a public Software-as-a-Service (SaaS) offering. The solutions architect has designed and deployed a new vSphere environment and the supporting network infrastructure for hosting all public services. ESXi hosts are configured to use Precision Time Protocol (PTP) and a local stratum-1 network time server.

Application provisioning and scaling will be managed by VMware vRealize Automation and can be run on Microsoft Windows or multiple distributions of Linux.

Which three recommendations should the architect include in the design to ensure that the service maintain timekeeping within an accuracy of one second?

(Choose three.)

- A. Use Microsoft Windows Server as the guest operating system.
- B. Configure the chrony time-sync agent on each virtual machine guest operating system.
- C. Set the virtual hardware device to use Host System Time (NTP) for each virtual machine running the application.
- D. Add a precision clock virtual device to each virtual machine running the application.
- E. Use a Linux distribution as the guest operating system.
- F. Add a virtual watchdog timer (VWDT) device to each virtual machine running the application.

Answer: ABC

NEW QUESTION 60

An architect decides to separate virtual desktops and application servers into separate vSphere clusters to meet security and management requirements.

What are two implications of this design decision? (Choose two.)

- A. There will be an increase in management overhead.
- B. Identical hardware must be procured for all hosts.
- C. There will be a reduction in performance.
- D. The patching cycles will affect both clusters at the same time.
- E. There will be additional licensing and cost requirements for both clusters.

Answer: DE

NEW QUESTION 65

During a requirements gathering workshop, the customer provides the following requirement (REQ) and constraints (CON):

- REQ01: The customer is looking for a way to limit database virtual machine (VM) placement to save on CPU licensing costs.
- CON01: There is a single cluster with no budget to scale.
- CON02: All virtual machines must run on the consolidated cluster.

Which two design decisions should the architect make to meet the customer requirement? (Choose two.)

- A. The solution must use VM-VM anti-affinity rules
- B. The solution must use vSphere DRS in manual mode
- C. The solution must use a vRealize Orchestrator workflow for VM placement
- D. The solution must use VM-Host affinity rules
- E. The solution must use vSphere VM and host DRS groups

Answer: DE

NEW QUESTION 70

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should for the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 74

An architect is tasked with designing a new VMware software-defined data center (SDDC) solution for an online retail customer who has a primary and secondary data center as well as 10 distribution hubs.

The customer has provided the following business requirements to help inform the design:

- The solution must support the running of up to 1,000 concurrent virtual machines across the primary and secondary data center.
- The solution must support the running of up to 20 concurrent virtual machines in each distribution hub.
- The solution must support the separation of management and lines-of-business application virtual machines.
- All management components (including directory services, backup, automation, operations and logging) must be deployed to the primary data center.
- All virtual infrastructure components must have redundancy of N+1.
- The solution should support a monthly uptime target of 99.9%.
- The recovery time objective (RTO) for the solution must be four hours.
- The recovery point objective (RPO) for the solution must be 24 hours.

Given the information from the customer, which assumption should the architect include in the design?

- A. All business application virtual machines can be deployed into a single cluster within the primary data center.
- B. Each distribution hub should be configured with a backup device.
- C. The wide area network has sufficient bandwidth to support centralized management.
- D. Each cluster will have a minimum of four hosts.

Answer: B

NEW QUESTION 79

An architect is designing a series of new vSphere environments for an organization. The environments will be deployed in their US-East and US-West region data centers. Each data center may have one or more dedicated vSphere environments. Only the vSphere environments within a data center will be configured with Enhanced Linked Mode. The Chief Technology Officer (CTO) has authorized the use of VMware vRealize Automation Cloud for automation. The build team creates standardized virtual machine images for various operating systems in Open Virtualization Format (OVF) and publishes the latest version on an as-needed basis to an internal HTTPS-accessible repository.

The architect must design a content library topology that meets the following requirements:

- A localized content library must be available in each data center.
- Each content library must be updated when an image is updated and released by the build team.
- It must leverage the existing build team processes.


What should the architect recommend to meet the requirements?

- A. Work with the build team to create a local content library for each vSphere environment. Import the OVF images when new image are published to the repository.
- B. Create a local content library for the primary vSphere environment in each data center. Create a subscribed content library for each additional vSphere environment in each data center.
- C. Configure the content library to download content automatically.
- D. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- E. Configure the content library to download content when needed.
- F. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- G. Configure the content library to download content automatically.

Answer: B

NEW QUESTION 80

Refer to the exhibit.

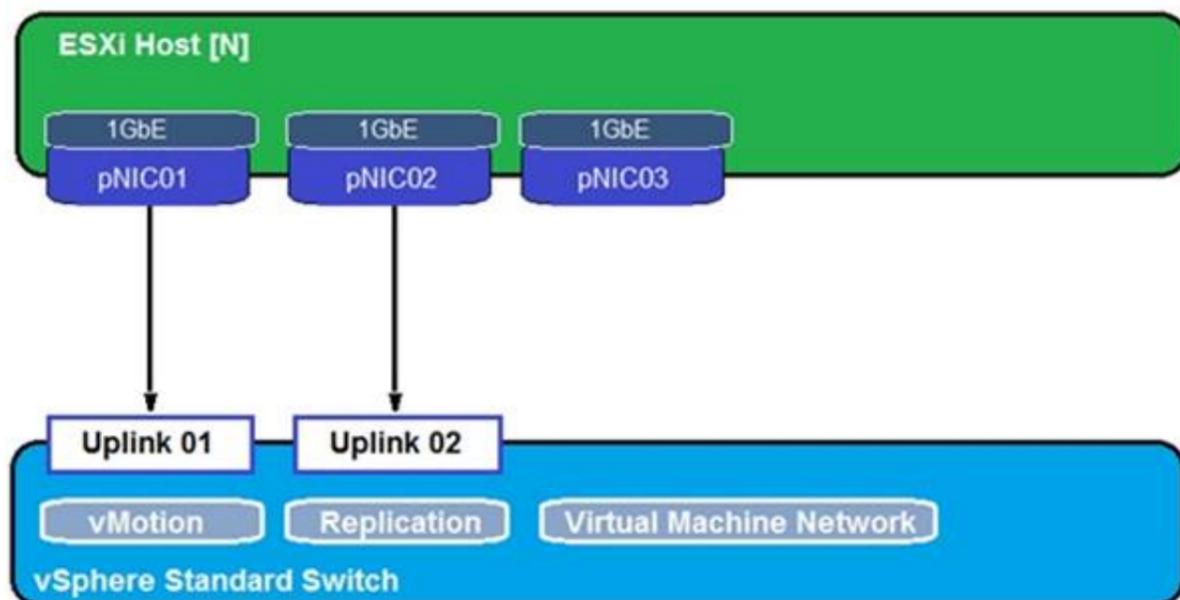

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:

The customer confirms that:

- Each ESXi host has approximately 200 virtual machines.
- They want to maximize the number of concurrent virtual machine migrations.
- When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their

challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 84

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC). Their current environment consists of the following components:

- > vSphere 7.0 and vSAN 7.0
- > External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- > 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments. Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 89

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated. They have the following in place:

- > Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- > 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- > 70ms latency between the primary and secondary data centers
- > Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 94

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 3V0-21.21 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 3V0-21.21 Product From:

<https://www.2passeasy.com/dumps/3V0-21.21/>

Money Back Guarantee

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year