

NSE7_SDW-7.0 Dumps

Fortinet NSE 7 - SD-WAN 7.0

https://www.certleader.com/NSE7_SDW-7.0-dumps.html



NEW QUESTION 1

Refer to the exhibit.

```
config system virtual-wan-link
  set status enable
  set load-balance-mode source-ip-based
  config members
    edit 1
      set interface "port1"
      set gateway 100.64.1.254
      set source 100.64.1.1
      set cost 15
    next
    edit 2
      set interface "port2"
      set gateway 100.64.2.254
      set priority 10
    next
  end
end
```

Based on the output shown in the exhibit, which two criteria on the SD-WAN member configuration can be used to select an outgoing interface in an SD-WAN rule? (Choose two.)

- A. Set priority 10.
- B. Set cost 15.
- C. Set load-balance-mode source-ip-ip-based.
- D. Set source 100.64.1.1.

Answer: AB

NEW QUESTION 2

Exhibit A –

#	Name	Type	Normalized Interface	Addressing Mode	IP/Netmask	Access
Physical (10)						
1	port1	Physical	port1	Manual	203.0.113.1/255.255.255.2	PING
2	port2	Physical	port2	Manual	203.0.113.9/255.255.255.2	PING
3	port3	Physical	port3	Manual	0.0.0.0/0.0.0.0	
4	port4	Physical	port4	Manual	172.16.0.9/255.255.255.24	PING
5	port5	Physical	port5	Manual	10.0.2.254/255.255.255.0	PING
6	port6	Physical	port6	Manual	0.0.0.0/0.0.0.0	
7	port7	Physical	port7	Manual	0.0.0.0/0.0.0.0	
8	port8	Physical	port8	Manual	0.0.0.0/0.0.0.0	
9	port9	Physical	port9	Manual	0.0.0.0/0.0.0.0	
10	port10	Physical	port10	Manual	192.168.0.32/255.255.255.	HTTPS, PING, SSH, HT
Aggregate (1)						
11	fortilink	Aggregate		Manual	169.254.1.1/255.255.255.0	PING, Security Fabric C
Tunnel (3)						
12	na1.root	Tunnel		Manual	0.0.0.0/0.0.0.0	
13	l2t.root	Tunnel		Manual	0.0.0.0/0.0.0.0	
14	ssl.root (SSL VPN interf	Tunnel		Manual	0.0.0.0/0.0.0.0	
EMAC VLAN (1)						
15	vl_lan_b1	EMAC VLAN		Manual	10.0.102.1/255.255.255.0	PING
SD-WAN Zone (2)						
16	virtual-wan-link	SD-WAN Zone				
17	SASE	SD-WAN Zone	SASE			

#	ID	Destination	Gateway	Interface	Distance	Priority	Status	Description
Static Route (2)								
1	1	0.0.0.0/0.0.0.0	203.0.113.2	port1	10	0	Enable	
2	2	0.0.0.0/0.0.0.0	203.0.113.10	port2	10	0	Enable	

Exhibit B –

#	Name	From	To	Source	Destination	Schedule	Service
1	Internet_Access	port5	port1	all	all	always	ALL
Implicit (2-2 / Total: 1)							
2	Implicit Deny	any	any	all	all	always	ALL

Exhibit A shows the system interface with the static routes and exhibit B shows the firewall policies on the managed FortiGate.

Based on the FortiGate configuration shown in the exhibits, what issue might you encounter when creating an SD-WAN zone for port1 and port2?

- A. port1 is assigned a manual IP address.
- B. port1 is referenced in a firewall policy.
- C. port2 is referenced in a static route.
- D. port1 and port2 are not administratively down.

Answer: B

NEW QUESTION 3

Refer to the exhibit, which shows the IPsec phase 1 configuration of a spoke.

```
config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set interface "port1"
    set ike-version 2
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256 aes256-sha256 aes128gcm-prfsha256 aes256gcm-prfsha384
    chacha20poly1305-prfsha256
    set comments "[created by FMG VPN Manager]"
    set idle-timeout enable
    set idle-timeoutinterval 5
    set auto-discovery-receiver enable
    set remote-gw 100.64.1.1
    set psksecret ENC
    6D5rVsaKlMeAyVYt1z95BS24Psew761wY023hnFVviwb6deIt8c5ltCa+iNYhuJ78gycfD4+Wuszpmlv8rRzrVh
    7DFkHaW2auAAprQ0dHUfaCzjOhME7mPw+8he2xB7Edb9ku/nZEHb0cKLkKYJc/p9J9IMweV21ZUgFjvIpXNxHxpH
    LReOFShoH01SPFKz5IYCVA==
    next
  end
```

What must you configure on the IPsec phase 1 configuration for ADVPN to work with SD-WAN?

- A. You must set ike-version to 1.
- B. You must enable net-device.
- C. You must enable auto-discovery-sender.
- D. You must disable idle-timeout.

Answer: B

NEW QUESTION 4

Refer to the exhibit.

```
# get router info routing-table all
...
B      10.0.2.0/24 [200/0] via 10.201.1.2 [3] (recursive via VPN0 tunnel 100.64.1.1), 00:00:54
        [200/0] via 10.202.1.2 [3] (recursive via VPN1 tunnel 100.64.1.9), 00:00:54
        [200/0] via 10.203.1.1 [3] (recursive via VPN2 tunnel 172.16.1.5), 00:00:54
...
```

The device exchanges routes using IBGP.

Which two statements are correct about the IBGP configuration and routing information on the device? (Choose two.)

- A. Each BGP route is three hops away from the destination.
- B. ibgp-multipath is disabled.
- C. additional-path is enabled.
- D. You can run the get router info routing-table database command to display the additional paths.

Answer: CD

NEW QUESTION 5

Which two conclusions for traffic that matches the traffic shaper are true? (Choose two.)

```
# diagnose firewall shaper traffic-shaper list name VoIP_Shaper
name VoIP_Shaper
maximum-bandwidth 6250 KB/sec
guaranteed-bandwidth 2500 KB/sec
current-bandwidth 93 KB/sec
priority 2
overhead 0
tos ff
packets dropped 0
bytes dropped 0
```

- A. The traffic shaper drops packets if the bandwidth is less than 2500 KBps.
- B. The measured bandwidth is less than 100 KBps.
- C. The traffic shaper drops packets if the bandwidth exceeds 6250 KBps.
- D. The traffic shaper limits the bandwidth of each source IP to a maximum of 6250 KBps.

Answer: BC

NEW QUESTION 6

Refer to the exhibit.

```
FortiGate # diagnose sys session list
session info: proto=1 proto_state=00 duration=25 expire=34 timeout=0 flags=00000000
socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=dirty may_dirty
statistic(bytes/packets/allow_err): org=84/1/1 reply=84/1/1 tuples=2
tx speed(Bps/kbps): 0/0 rx speed(Bps/kbps): 0/0
origin->sink: org pre->post, reply pre->post dev=5->4/4->5 gwy=192.168.73.2/10.0.1.10
hook-post dir=org act=snat 10.0.1.10:2246->8.8.8.8:8(192.168.73.132:62662)
hook-pre dir=reply act=dnat 8.8.8.8:62662->192.168.73.132:0(10.0.1.10:2246)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=000000a2c tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 80000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
total session 1
```

Based on the exhibit, which statement about FortiGate re-evaluating traffic is true?

- A. The type of traffic defined and allowed on firewall policy ID 1 is UDP.
- B. FortiGate has terminated the session after a change on policy ID 1.
- C. Changes have been made on firewall policy ID 1 on FortiGate.
- D. Firewall policy ID 1 has source NAT disabled.

Answer: C

NEW QUESTION 7

Refer to the exhibit.

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
  Gen(5), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(priority), link-cost-
  factor(latency), link-cost-threshold(10), health-check(VPN_PING)
  Members(3):
    1: Seq_num(3 T_INET_0_0), alive, latency: 101.349, selected
    2: Seq_num(4 T_INET_1_0), alive, latency: 151.278, selected
    3: Seq_num(5 T_MPLS_0), alive, latency: 200.984, selected
  Src address(1):
    10.0.1.0-10.0.1.255

  Dst address(1):
    10.0.0.0-10.255.255.255

branch1_fgt (3) # show
config service
  edit 3
    set name "Corp"
    set mode priority
    set dst "Corp-net"
    set src "LAN-net"
    set health-check "VPN_PING"
    set priority-members 3 4 5
  next
end
```

The exhibit shows the SD-WAN rule status and configuration.

Based on the exhibit, which change in the measured latency will make T_MPLS_0 the new preferred member?

- A. When T_INET_0_0 and T_MPLS_0 have the same latency.
- B. When T_MPLS_0 has a latency of 100 ms.
- C. When T_INET_0_0 has a latency of 250 ms.
- D. When T_MPLS_0 has a latency of 80 ms.

Answer: D

NEW QUESTION 8

Refer to the exhibit.


```
config vpn ipsec phase1-interface
edit "FIRST_VPN"
    set type dynamic
    set interface "port1"
    set peertype any
    set proposal aes128-sha256 aes256-sha38
    set dhgrp 14 15 19
    set xauthtype auto
    set authusrgrp "first-group"
    set psksecret fortinet1
next
edit "SECOND_VPN"
    set type dynamic
    set interface "port1"
    set peertype any
    set proposal aes128-sha256 aes256-sha38
    set dhgrp 14 15 19
    set xauthtype auto
    set authusrgrp "second-group"
    set psksecret fortinet2
next
edit
```

FortiGate has multiple dial-up VPN interfaces incoming on port1 that match only FIRST_VPN.

Which two configuration changes must be made to both IPsec VPN interfaces to allow incoming connections to match all possible IPsec dial-up interfaces? (Choose two.)

- A. Specify a unique peer ID for each dial-up VPN interface.
- B. Use different proposals are used between the interfaces.
- C. Configure the IKE mode to be aggressive mode.
- D. Use unique Diffie Hellman groups on each VPN interface.

Answer: AC

NEW QUESTION 9

Which are two benefits of using CLI templates in FortiManager? (Choose two.)

- A. You can reference meta fields.
- B. You can configure interfaces as SD-WAN members without having to remove references first.
- C. You can configure FortiManager to sync local configuration changes made on the managed device, to the CLI template.
- D. You can configure advanced CLI settings.

Answer: AD

NEW QUESTION 10

Refer to the exhibits.

Exhibit A

```
branch1_fgt (3) # show
config service
edit 3
    set name "Corp"
    set mode sla
    set dst "Corp-net"
    set src "LAN-net"
    config sla
        edit "VPN_PING"
            set id 1
        next
        edit "VPN_HTTP"
            set id 1
        next
    end
    set priority-members 3 4 5
    set gateway enable
next
end
```

Exhibit B

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(1), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(sla), sla-compare-order
Members(2):
  1: Seq_num(5 T_MPLS_0), alive, sla(0x3), gid(0), cfg_order(2), cost(0), selected
  2: Seq_num(4 T_INET_1_0), alive, sla(0x1), gid(0), cfg_order(1), cost(0), selected
  3: Seq_num(3 T_INET_0_0), alive, sla(0x0), gid(0), cfg_order(0), cost(0), selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt # get router info routing-table all | grep T_
S      10.0.0.0/8 [1/0] via T_INET_0_0 tunnel 100.64.1.1
          [1/0] via T_INET_1_0 tunnel 100.64.1.9
S      10.201.1.254/32 [15/0] via T_INET_0_0 tunnel 100.64.1.1
S      10.202.1.254/32 [15/0] via T_INET_1_0 tunnel 100.64.1.9
S      10.203.1.254/32 [15/0] via T_MPLS_0 tunnel 172.16.1.5

branch1_fgt # diagnose sys sdwan member | grep T_
Member(3): interface: T_INET_0_0, flags=0x4 , gateway: 100.64.1.1, peer: 10.201.1.254,
priority: 0 1024, weight: 0
Member(4): interface: T_INET_1_0, flags=0x4 , gateway: 100.64.1.9, peer: 10.202.1.254,
priority: 0 1024, weight: 0
Member(5): interface: T_MPLS_0, flags=0x4 , gateway: 172.16.1.5, peer: 10.203.1.254,
priority: 0 1024, weight: 0
```

Exhibit A shows the configuration for an SD-WAN rule and exhibit B shows the respective rule status, the routing table, and the member status. The administrator wants to understand the expected behavior for traffic matching the SD-WAN rule. Based on the exhibits, what can the administrator expect for traffic matching the SD-WAN rule?

- A. The traffic will be load balanced across all three overlays.
- B. The traffic will be routed over T_INET_0_0.
- C. The traffic will be routed over T_MPLS_0.
- D. The traffic will be routed over T_INET_1_0.

Answer: C

NEW QUESTION 10

Refer to the exhibits.
Exhibit A

Edit Performance SLA

Name

Level3_DNS

IP Version

IPv4

IPv6

Probe Mode

Active

Passive

Prefer Passive

Protocol

Ping

TCP ECHO

UDP ECHO

HTTP

TWAMP

Server

4.2.2.1

4.2.2.2

Participants

All SD-WAN Members

Specify

port1

port2

2 Entries

Enable Probe Packets

SLA Targets

+ Add Target

Link Status

Interval

500

Milliseconds

Failure Before Inactive

3

(max 3600)

Restore Link After

2

(max 3600)

Action When Inactive

Update Static Route

Cascade Interfaces

Exhibit B -

The Leader of IT Certification

visit - <https://www.certleader.com>

```
branch1_fgt # diagnose sys sdwan member | grep port
Member(1): interface: port1, flags=0x0 , gateway: 192.2.0.2, priority: 0 1024, weight: 0
Member(2): interface: port2, flags=0x0 , gateway: 192.2.0.10, priority: 0 1024, weight: 0

branch1_fgt # get router info routing-table all | grep port
S*    0.0.0.0/0 [1/0] via 192.2.0.2, port1
      [1/0] via 192.2.0.10, port2
S     8.8.8.8/32 [10/0] via 192.2.0.11, port2
C     10.0.1.0/24 is directly connected, port5
S     172.16.0.0/16 [10/0] via 172.16.0.2, port4
C     172.16.0.0/29 is directly connected, port4
C     192.2.0.0/29 is directly connected, port1
C     192.2.0.8/29 is directly connected, port2
C     192.168.0.0/24 is directly connected, port10

branch1_fgt # diagnose sys sdwan health-check status Level3_DNS
Health Check(Level3_DNS):
Seq(1 port1): state(alive), packet-loss(0.000%) latency(1.919), jitter(0.137), bandwidth-
up(10238), bandwidth-dw(10238), bandwidth-bi(20476) sla_map=0x0
Seq(2 port2): state(alive), packet-loss(0.000%) latency(1.509), jitter(0.101), bandwidth-
up(10238), bandwidth-dw(10238), bandwidth-bi(20476) sla_map=0x0
```

Exhibit A shows the SD-WAN performance SLA and exhibit B shows the SD-WAN member status, the routing table, and the performance SLA status. If port2 is detected dead by FortiGate, what is the expected behavior?

- A. Port2 becomes alive after three successful probes are detected.
- B. FortiGate removes all static routes for port2.
- C. The administrator manually restores the static routes for port2, if port2 becomes alive.
- D. Host 8.8.8.8 is reachable through port1 and port2.

Answer: B

Explanation:

This is due to Update static route is enable which removes the static route entry referencing the interface if the interface is dead

NEW QUESTION 12

Which two settings can you configure to speed up routing convergence in BGP? (Choose two.)

- A. update-source
- B. set-route-tag
- C. holdtime-timer
- D. link-down-failover

Answer: CD

NEW QUESTION 15

Which components make up the secure SD-WAN solution?

- A. Application, antivirus, and URL, and SSL inspection
- B. Datacenter, branch offices, and public cloud
- C. FortiGate, FortiManager, FortiAnalyzer, and FortiDeploy
- D. Telephone, ISDN, and telecom network.

Answer: C

NEW QUESTION 16

Which diagnostic command can you use to show the member utilization statistics measured by performance SLAs for the last 10 minutes?

- A. diagnose sys sdwan intf-sla-log
- B. diagnose sys sdwan health-check
- C. diagnose sys sdwan log
- D. diagnose sys sdwan sla-log

Answer: D

NEW QUESTION 20

Exhibit.

```
id=20010 trace_id=1402 func=print_pkt_detail line=5588 msg="vd-root:0 received a
packet(proto=6, 10.1.10.1:52490->42.44.50.10:443) from port3. flag [.], seq 1213725680,
ack 1169005655, win 65535"
id=20010 trace_id=1402 func=resolve_ip_tuple_fast line=5669 msg="Find an existing
session, id=00001ca4, original direction"
id=20010 trace_id=1402 func=fw_forward_dirty_handler line=447 msg="Denied by quota
check"
```

Which conclusion about the packet debug flow output is correct?


- A. The total number of daily sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the traffic shaper, and the packet was dropped.

- B. The packet size exceeded the outgoing interface MTU.
- C. The number of concurrent sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the traffic shaper, and the packet was dropped.
- D. The number of concurrent sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the firewall policy, and the packet was dropped.

Answer: C

NEW QUESTION 21

Two hub-and-spoke groups are connected through a site-to-site IPsec VPN between Hub 1 and Hub 2. The administrator configured ADVPN on both hub-and-spoke groups.

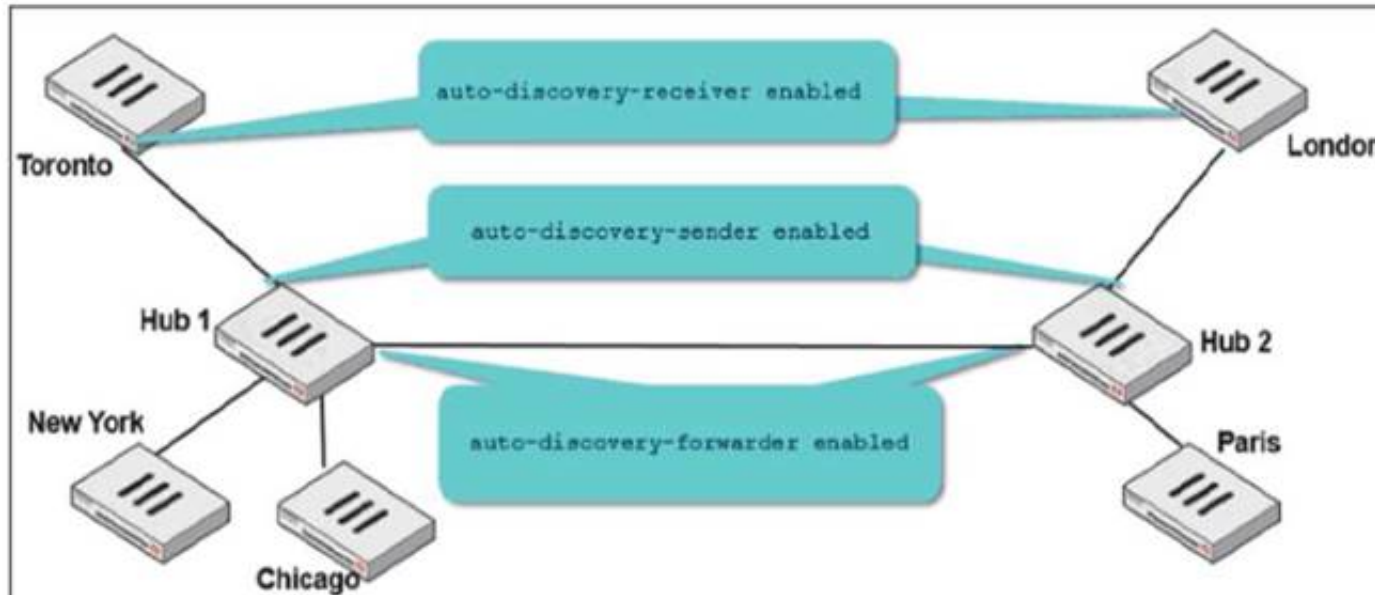

Which two outcomes are expected if a user in Toronto sends traffic to London? (Choose two.)

- A. London generates an IKE information message that contains the Toronto public IP address.
- B. Traffic from Toronto to London triggers the dynamic negotiation of a direct site-to-site VPN.
- C. Toronto needs to establish a site-to-site tunnel with Hub 2 to bypass Hub 1.
- D. The first packets from Toronto to London are routed through Hub 1 then to Hub 2.

Answer: BD

NEW QUESTION 24

Which are three key routing principles in SD-WAN? (Choose three.)

- A. FortiGate performs route lookups for new sessions only.
- B. Regular policy routes have precedence over SD-WAN rules.
- C. SD-WAN rules have precedence over ISDB routes.
- D. By default, SD-WAN members are skipped if they do not have a valid route to the destination.
- E. By default, SD-WAN rules are skipped if the best route to the destination is not an SD-WAN member.

Answer: BDE

NEW QUESTION 28

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE7_SDW-7.0 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE7_SDW-7.0-dumps.html