



# VMware

## Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

## About ExamBible

*[Your Partner of IT Exam](#)*

## Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

## Our Advances

### \* 99.9% Uptime

All examinations will be up to date.

### \* 24/7 Quality Support

We will provide service round the clock.

### \* 100% Pass Rate

Our guarantee that you will pass the exam.

### \* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

### NEW QUESTION 1

During a transformation project kick-off meeting, an architect highlights specific areas on which to focus while developing the new conceptual design. Which two of the listed statements are business requirements? (Choose two.)

- A. The project should use the existing storage devices within the data center
- B. Sites must support a network latency of less than 12 ms round-trip time (RTT)
- C. The solution must allow data replication between sites
- D. There is no budget specifically assigned for disaster recovery
- E. There must not be a single point of failure for the virtual infrastructure

**Answer:** CE

### NEW QUESTION 2

During a requirements gathering workshop, the customer's Chief Information Security Office (CISO) provides the following requirements that are pertinent to the design of a new vSphere environment:

- > All operating system critical patches must be installed within 24 hours of release.
- > All virtual machine templates must be updated every three months in line with company policy.

Which requirement classification is being gathered for the design documentation?

- A. Security
- B. Manageability
- C. Recoverability
- D. Availability

**Answer:** A

#### Explanation:

This is lifecycle management function. The requirement is system critical patches, not system security patches.

### NEW QUESTION 3

An architect is designing a new vSphere environment to meet the following requirements:

- > The environment must support 5,000 virtual machines.
- > The environment will be built initially using 350 hosts.

Which vCenter Server appliance deployment size should the architect specify for the design?

- A. Large
- B. Small
- C. Tiny
- D. Medium

**Answer:** A


#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-077C7523-E0EA-492>

### NEW QUESTION 4

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:

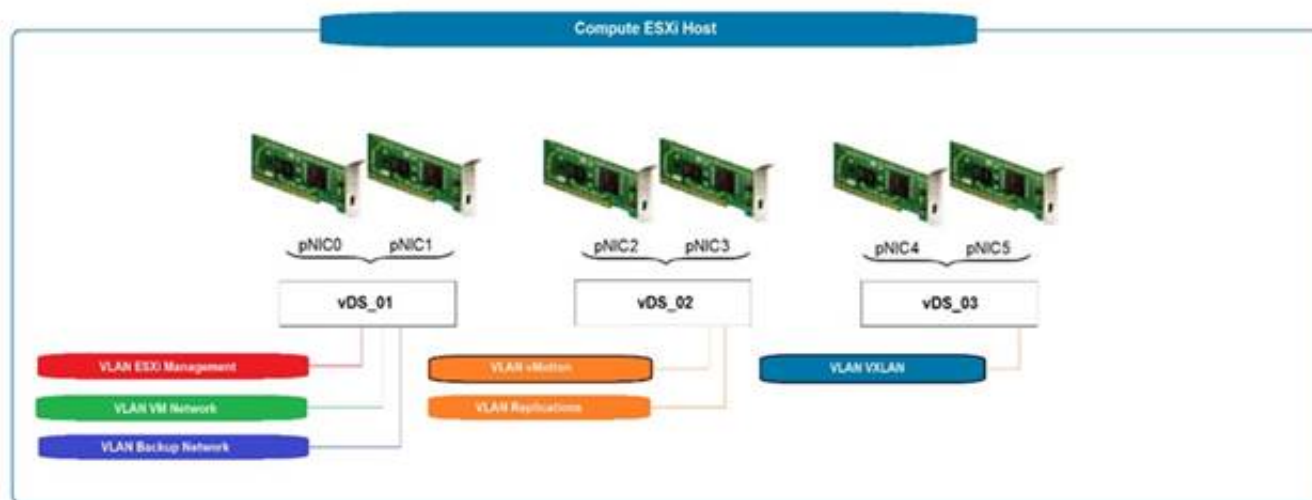

What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup network Use explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS\_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS\_02

**Answer:** A

#### NEW QUESTION 5

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- > Full virtual machine image backup and restore
- > Incremental virtual machine image backup and restore
- > File level backup and restore within both Windows and Linux virtual machines
- > LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

**Answer: C**

#### NEW QUESTION 6

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- > The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- > The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- > The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- > The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- > The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- > All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- > The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

**Answer: BE**

#### NEW QUESTION 7

An architect is tasked with planning the design of a new vSphere environment. When commissioned, this environment will be used to migrate an existing set of virtual machines.

An inventory of the existing infrastructure, including configured vCPU, RAM and storage sizes has been provided.

In order for each virtual machine to be migrated, which two data sources with peak and average utilization data are required for sizing? (Choose two.)

- A. %Ready
- B. Disk Write latency
- C. CPU
- D. Ballooned memory
- E. IOPS

**Answer: BE**

#### NEW QUESTION 8

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- > The SDDC must be deployed at two locations: primary and secondary.
- > vSphere Replication must be used to replicate virtual machines between the two locations.
- > Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- > One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

**Answer: D**

#### NEW QUESTION 9

Following a recent acquisition, an architect needs to merge IT assets into its current data center. The combined vSphere environment will need to run the newly acquired company's virtual machines.

Network integration work has already been completed and the current environment has capacity to host all virtual machines. The Operations team needs to identify which virtual machines belong to the acquired company and report on their usage.

How should the architect merge the company's assets and virtual machines?

- A. Leave the newly acquired company's assets in its current place

- B. Lift and shift the acquired assets into the data center
- C. Migrate the acquired company's virtual machines into the existing vSphere environment
- D. Migrate and apply vSphere tags to the acquired company's virtual machines

**Answer:** D

#### NEW QUESTION 10

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC). During the discovery phase, the following information is documented: Cluster One

- > Six ESXi hosts
- > vSphere HA with host failures cluster tolerates = 1
- > Proactive HA is enabled and set to automated
- > Fully Automated vSphere DRS
- > Transparent Page Sharing (TPS) is enabled Cluster Two
- > Eight ESXi hosts
- > vSphere HA with host failures cluster tolerates = 1
- > Proactive HA is disabled
- > Partially Automated vSphere DRS
- > Transparent Page Sharing (TPS) is disabled Cluster Three
- > Three ESXi hosts
- > vSphere HA with admission control is disabled
- > Proactive HA is not supported
- > Transparent Page Sharing (TPS) is disabled Virtual Machine Resource Profile 1
- > Memory sharing techniques should not be used
- > Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- > Memory sharing techniques should not be used
- > Virtual machines should be automatically restarted in the event of host failure regardless of available resources
- > Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

**Answer:** DE

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-FEAC3A43-C57E>

#### NEW QUESTION 10

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

**Answer:** C

#### NEW QUESTION 12

The architect for a large enterprise is tasked with reviewing a proposed design created by a service partner.

Which design elements are expected to be detailed within the physical design section of the documentation?

- A. A design diagram illustrating the configuration and specific attributes, such as IP addresses
- B. A list of requirements, constraints, and risks
- C. A solution architecture diagram with the components and data flow
- D. An entity relationship diagram describing upstream and downstream dependencies for specific service components

**Answer:** B

#### NEW QUESTION 15

An architect is designing a new VMware solution for a customer that has a number of different resource profiles.

The following are the business requirements for the design:

The solution must support virtual machines with the following storage profiles:

-Write-intensive

-Backup

-Write-Once-Read-Many (WORM) archive

- > The solution must support migration of virtual machine disks between storage profiles.
- > The WORM archive data must be located at an isolated secure site.
- > The backup storage array must only be connected to a backup media server.
- > All data should be recoverable from backup.

Which design decision should the architect make to meet the business requirements?

- A. The solution will leverage a single storage array for the WORM archive and write-intensive storage profiles
- B. The solution will leverage the same array for the backup and write-intensive storage profiles
- C. The solution will leverage a different array for each storage profile
- D. The solution will leverage a single storage array for all storage profiles

**Answer:** C

#### NEW QUESTION 17

An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture. During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s.

What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?

- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

**Answer:** C

#### NEW QUESTION 20

A customer has six hosts available in a cluster. When running at full capacity, all virtual machines can be run on two hosts.

How many hosts can the customer place into maintenance mode at the same time while still providing N+2 resiliency to the cluster?

- A. Two
- B. Three
- C. One
- D. None

**Answer:** A

#### NEW QUESTION 21

Which two of the listed requirements would be classified as performance non-functional requirements? (Choose two.)

- A. The vSphere platform must be able to provide a recovery time objective of 30 minutes
- B. The vSphere platform must be able to provide a minimum throughput of 400 MB/s
- C. The vSphere platform must be able to provide N+1 redundancy
- D. The vSphere platform must be able to provide a maximum read latency of 15 ms
- E. The vSphere platform must be able to provide a service-level agreement (SLA) of 99,9%

**Answer:** BD

#### NEW QUESTION 26

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a

mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- > Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- > 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- > 70ms latency between the primary and secondary data centers
- > Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

**Answer:** BC

#### NEW QUESTION 31

.....



## Relate Links

**100% Pass Your 3V0-21.23 Exam with ExamBible Prep Materials**

<https://www.exambible.com/3V0-21.23-exam/>

## Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>