

JN0-105 Dumps

Junos - Associate (JNCIA-Junos) 2024 Exam

<https://www.certleader.com/JN0-105-dumps.html>



NEW QUESTION 1

Which two functions are performed by the PFE? (Choose two.)

- A. It implements firewall filters.
- B. It selects active routes.
- C. It forwards transit traffic.
- D. It maintains the routing table.

Answer: AC

Explanation:

The Packet Forwarding Engine (PFE) in Junos OS performs several key functions, including implementing firewall filters (A) and forwarding transit traffic (C). The PFE applies firewall filter rules to incoming and outgoing traffic and is responsible for the high-speed forwarding of packets based on the information in the forwarding table.

NEW QUESTION 2

What is a benefit of using J-Web?

- A. It simultaneously manages multiple devices.
- B. It provides a customizable dashboard.
- C. It provides more advanced features than the CLI.
- D. It provides console-based management.

Answer: B

Explanation:

If you've committed a configuration and then need to revert to the previous configuration, the rollback command is used. Since the incorrect IP address has not been committed, as indicated by the commit check command being successful, issuing rollback 1 will undo the changes made in the current session, which includes the accidental entry of the IP address.

NEW QUESTION 3

Which Junos OS component is responsible for maintaining the forwarding table?

- A. Routing Engine
- B. chassis control daemon
- C. Packet Forwarding Engine
- D. management daemon

Answer: C

Explanation:

The Packet Forwarding Engine (PFE) in Junos OS is responsible for maintaining the forwarding table. The PFE processes incoming packets, performs route lookups in the forwarding table, and forwards packets based on this information, offloading these tasks from the Routing Engine to ensure efficient packet forwarding.

NEW QUESTION 4

You are asked to view the real-time usage statistics for the busiest interfaces on a device running Junos OS. Which command will achieve this task?

- A. monitor traffic absolute-sequence
- B. monitor interface traffic
- C. monitor traffic
- D. show interfaces extensive

Answer: B

Explanation:

To view real-time usage statistics for the busiest interfaces on a device running Junos OS, the correct command is B, "monitor interface traffic." This command provides a dynamic, real-time view of the traffic flowing through the interfaces, allowing administrators to quickly identify and monitor the busiest interfaces on the device.

NEW QUESTION 5

Which two statements are correct regarding Layer 2 network switches? (Choose two.)

- A. Switches create a single collision domain.
- B. Switches are susceptible to traffic loops.
- C. Switches flood broadcast traffic.
- D. Switches do not learn MAC addresses.

Answer: BC

Explanation:

Layer 2 network switches are crucial components in local area networks (LANs), providing multiple functions for data packet forwarding and network segmentation. One inherent characteristic of switches is their susceptibility to traffic loops, especially in networks with redundant paths. Without proper loop prevention protocols like Spanning Tree Protocol (STP), loops can cause broadcast storms and network instability. Additionally, switches inherently flood broadcast traffic to all ports within the broadcast

domain, except the port on which the broadcast was received. This is because broadcast frames are meant to be delivered to all devices within the VLAN, and the switch ensures this by flooding these frames to all ports in the VLAN, except the source port.

NEW QUESTION 6

What information does the forwarding table require so that the device forwards traffic? (Choose three.)

- A. OSPF metric value
- B. next hop IP address
- C. BGP local preference value
- D. outgoing interface name
- E. next hop MAC address

Answer: BDE

Explanation:

The forwarding table in a network device requires specific information to efficiently forward traffic toward its destination. This includes the next hop IP address, which indicates the next router or device in the path to the destination. The outgoing interface name identifies the physical or logical interface through which the packet should be sent to reach the next hop. Lastly, the next hop MAC address is crucial for Layer 2 forwarding decisions, allowing the device to encapsulate the IP packet in a frame that can be understood by Ethernet or other Layer 2 protocols. OSPF metric values and BGP local preference values are used in the routing decision process to select the best path and populate the forwarding table but are not directly used by the forwarding table to forward traffic.

NEW QUESTION 7

Which two statements about route preference in Junos are correct? (Choose two.)

- A. Both direct and static routes have the same preference.
- B. Both direct and local routes have the same preference.
- C. Both OSPF internal and OSPF AS external routes have the same preference.
- D. Both EBGP and IBGP routes have the same preference.

Answer: BC

Explanation:

In Junos OS, route preference (also known as administrative distance) is used to determine the preferred route among multiple routes to the same destination learned via different routing protocols. Direct and local routes, which represent directly connected networks and interfaces, typically share the same low preference value, indicating high trustworthiness because they are directly connected to the router. OSPF internal routes (routes within the same OSPF area) and OSPF AS external routes (routes that are external to the OSPF autonomous system but redistributed into OSPF) also share the same preference value, although this value is higher (indicating less trust) than for direct and local routes. This distinction helps the routing engine decide which routes to use when multiple paths are available.

NEW QUESTION 8

A network administrator is attempting to route traffic on a Juniper switch to one of three different VLANs: Prod, Test, and Dev. Each VLAN has been assigned a numerical value.

In this scenario, what are these numerical values called?

- A. defaults
- B. interfaces
- C. names
- D. tags

Answer: D

Explanation:

In the context of VLANs (Virtual Local Area Networks) on a Juniper switch, the numerical values assigned to each VLAN, such as those for Prod, Test, and Dev, are known as VLAN tags. These tags are part of the 802.1Q VLAN standard, which allows multiple VLANs to coexist on a single physical network. Each tag uniquely identifies the VLAN to which a frame belongs, enabling the switch to segregate and manage traffic based on VLAN membership. This tagging mechanism allows for efficient traffic separation and management, ensuring that devices within one VLAN do not receive traffic intended for another, thus maintaining network security and efficiency.

NEW QUESTION 9

Which two statements are correct about Junos traceoptions? (Choose two.)

- A. Traceoptions cannot be enabled in a production environment.
- B. Traceoptions are enabled through configuration.
- C. Traceoptions are enabled by default.
- D. Traceoption output, by default, is stored in /var/iog/<file-name>.

Answer: BD

Explanation:

Traceoptions in Junos OS are used for detailed debugging and troubleshooting of protocols and processes within the system. They are not enabled by default due to the potential performance impact and volume of data generated. Instead, traceoptions are enabled through specific configuration settings under the relevant protocol or process hierarchy. This allows administrators to target their troubleshooting efforts and control the scope of logging. By default, the output generated by traceoptions is stored in files located in the /var/log directory, with the file name typically specified in the traceoptions configuration. This structured approach to logging and debugging helps in diagnosing complex issues without overwhelming the system or the administrator with irrelevant data.

NEW QUESTION 10

Which statement is correct concerning exception traffic processing?

- A. Exception traffic is always dropped during congestion.
- B. Exception traffic is rate-limited to protect the RE.
- C. Exception traffic is discarded by the PFE.
- D. Exception traffic is never forwarded.

Answer: B

Explanation:

Exception traffic refers to packets that the Packet Forwarding Engine (PFE) cannot process normally and must be forwarded to the Routing Engine (RE) for further processing. This includes packets destined for the router itself or packets needing special handling that the PFE cannot provide. To protect the RE from being overwhelmed by such traffic, which could potentially impact the router's control plane functions, exception traffic is rate-limited. This means that there's a threshold to how much exception traffic can be sent to the RE, ensuring that the router's critical management and control functions remain stable and responsive even during high traffic volumes or attacks.

NEW QUESTION 10

Which two statements about firewall filters are correct? (Choose two.)

- A. Firewall filters are stateless.
- B. Firewall filters can match Layer 7 parameters.
- C. Firewall filters are stateful.
- D. Firewall filters can match Layer 4 parameters.


Answer: AD

Explanation:

Firewall filters in Junos OS are stateless, meaning they process each packet individually without regard to the state of a connection or sequence of packets. These filters can match various packet attributes, including those at Layer 4, such as TCP and UDP port numbers. This allows for granular control over traffic based on the type of service or application. Unlike stateless filters, stateful firewalls keep track of the state of active connections and make decisions based on the context of the traffic flow, which is not a capability of Junos firewall filters. Additionally, Junos firewall filters primarily operate up to Layer 4 and do not natively inspect Layer 7 parameters, which involve application-level data.

NEW QUESTION 14

Exhibit.

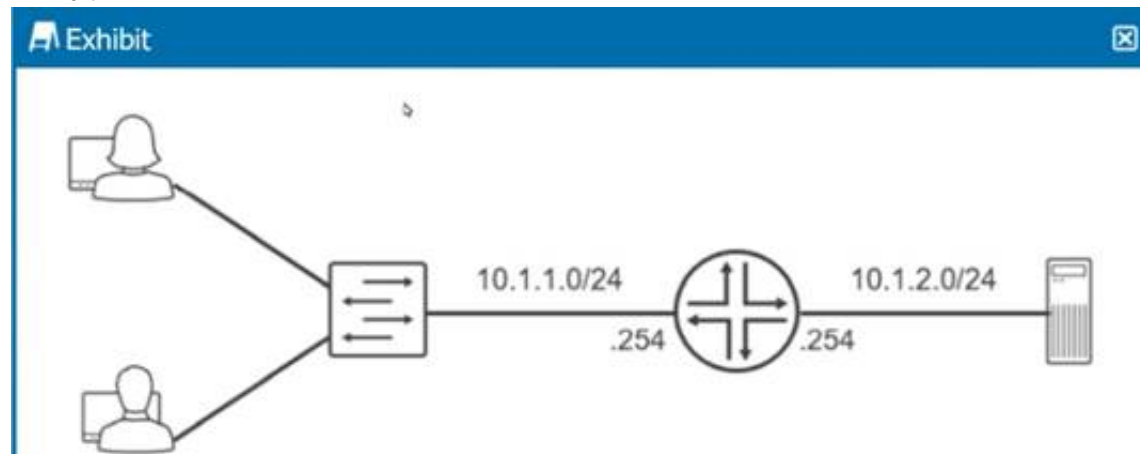

Referring to the exhibit, which routing configuration is required for these two users to access the remote server?

- A. Users must connect directly to the router.
- B. Users and the server require a default gateway.
- C. Trunk ports must be enabled on the switch.
- D. A routing protocol must be enabled on the router.

Answer: B

Explanation:

For the users in the 10.1.1.0/24 subnet and the server in the 10.1.2.0/24 subnet to communicate with each other, they need to route packets through the router that connects these two subnets. Each user and the server need to have their default gateway set to the IP address of the router interface on their respective subnet (.254). This ensures that packets destined for other subnets are sent to the router, which then routes them to the correct destination subnet.

References:

- ? Juniper official documentation: Configuring Basic Routing.
- ? General networking principles.

NEW QUESTION 15

You have completed the initial configuration of your new Junos device. You want to be able to load this configuration at a later time. Which action enables you to perform this task?

- A. Enter the load factory-default command.
- B. Enter the request system reboot command.
- C. Enter the request system zeroize command.
- D. Enter the request system configuration rescue save command.

Answer: D

Explanation:

In Junos OS, the request system configuration rescue save command is used to save the current active configuration as a rescue configuration. This feature is particularly useful for preserving a known good configuration state that can be quickly reverted to in case of configuration errors or issues. By saving a rescue configuration, administrators can ensure that they have a reliable fallback option that can be loaded in the future to restore the device's operation without having to reconfigure from scratch. This is an essential practice for maintaining network stability and quick recovery.

NEW QUESTION 19

You have just increased the MTU size of interface ge-0/0/0 and committed the configuration. Which command would help you identify the applied MTU change?

- A. monitor interface ge-0/0/0
- B. monitor traffic interface ge-0/0/0
- C. show interfaces ge-0/0/0 terse
- D. show interfaces ge-0/0/0

Answer: D

Explanation:

After increasing the MTU size of an interface and committing the configuration, the command to verify the applied MTU change is D, "show interfaces ge- 0/0/0." This command displays detailed information about the interface, including the current MTU size, making it the best choice for verifying the applied changes.

NEW QUESTION 21

Which command displays all IPv6 routes in the default routing instance?

- A. showroute table inet.0
- B. showroute table inet6.1
- C. showroute table inet.1
- D. showroute table inet6.0

Answer: D

Explanation:

The show route table inet6.0 command displays all IPv6 routes in the default routing instance. In Junos OS, the routing table for IPv6 addresses is referred to as inet6.0, whereas inet.0 is used for IPv4 unicast routes. The other options do not correspond to the correct IPv6 routing table.

References:

? Juniper official documentation: Junos OS Routing Tables Overview.

NEW QUESTION 25

What will the request system configuration rescue save command do?

- A. It saves the most recently committed configuration as the rescue configuration.
- B. It saves the candidate configuration as the rescue configuration.
- C. It saves a configuration version prior to the configuration most recently committed as the rescue configuration.
- D. It activates the rescue configuration.

Answer: A

Explanation:

The request system configuration rescue save command in Junos OS saves the most recently committed configuration as the rescue configuration. This rescue configuration can be used to recover the device if future configurations cause issues. It ensures there is a stable, known-good configuration to fall back on, which is crucial in network management and troubleshooting.

References:

? "rescue : save configurations as the rescue: request system configuration save
.....(saves the current configs as a rescue configs)" from Useful Juniper Commands.txt.

? Juniper official documentation: Configuring and Activating a Rescue Configuration.

NEW QUESTION 30

Exhibit

[edit]

user@routerl set interfaces ge-0/1/2 unit 0 family inet address 172.16.101.1/24 [edit]

user@router# commit check

configuration check succeeds

[edit]

user@router#

You need to configure interface ge-0/1/2 with an IP address of 172.16.100.1/24. You have accidentally entered 172.16.101.1/24 as shown in the exhibit.

Which command should you issue to solve the problem?

- A. (edit) user@router# rollback 1
- B. [edit] user@router# rollback 2
- C. [edit] user@router# rollback 0
- D. [edit] user@router# rollback rescue

Answer: A

Explanation:

If you've committed a configuration and then need to revert to the previous configuration, the rollback command is used. Since the incorrect IP address has not been committed, as indicated by the commit check command being successful, issuing rollback 1 will undo the changes made in the current session, which includes the accidental entry of the IP address.

NEW QUESTION 35

Exhibit

user@router> show route 192.168.36.1

inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden) + = Active Route, - = Last Active, * = Both 192.168.36.1/32 *[Static/5] 00:00:31

> to 10.1.1.2 via ge-0/0/10.0 [OSPF/IO] 00:02:21, metric 1 > to 10.1.1.2 via ge-0/0/10.0

Referring to the exhibit, which route(s) will be selected by Junos for packet forwarding?

- A. The OSPF route will be selected.
- B. The static route will be selected.
- C. The Junos OS randomly selects one route.
- D. The Junos OS selects both routes.

Answer: B

Explanation:

Junos OS selects routes based on the route preference (also known as administrative distance). Static routes typically have a lower route preference than OSPF routes, meaning they are more preferred. Since the static route to 192.168.36.1/32 is shown with a preference of 5, it will be selected over the OSPF route for packet forwarding, assuming no other factors such as route filters or policies affect the routing decision.

NEW QUESTION 38

Which criteria does the Junos OS use to select an active route when two entries exist in the routing table?

- A. the route with the lowest preference number
- B. the most recently learned dynamic route
- C. the route with the highest preference number
- D. the route with the highest metric

Answer: A

Explanation:

In Junos OS, when two entries for the same destination exist in the routing table, the route with the lowest preference number is selected as the active route. This preference number, also known as the route preference or administrative distance, is used to prioritize routes received from different routing protocols.

NEW QUESTION 41

Which two statements are correct about a Routing Engine? (Choose two.)

- A. It processes CoS marked traffic.
- B. It forwards transit traffic.
- C. It processes management traffic.
- D. It maintains routing tables.

Answer: CD

Explanation:

The Routing Engine (RE) in Juniper Networks devices plays a pivotal role in the control plane, handling tasks that are critical for the operation and management of the network. One of its key functions is processing management traffic, which includes user commands, system configuration, and monitoring operations. The RE also maintains routing tables, which are essential for network routing decisions. These tables contain network topology information and routing paths, which the RE uses to update the Packet Forwarding Engine (PFE) so that it can forward packets appropriately. The RE does not forward transit traffic or process Class of Service (CoS) marked traffic, as these tasks are handled by the PFE.

NEW QUESTION 42

You have configured some interfaces on a Junos device; however, you have not yet committed the configuration. What happens if you issue the rollback 0 command in this scenario?

- A. The messages.log file is deleted.
- B. The factory default configuration is loaded.
- C. The Junos device is rebooted.
- D. The interface changes you made are discarded.

Answer: D

Explanation:

Issuing the rollback 0 command in Junos OS will discard any uncommitted changes and revert to the last committed configuration. This command effectively cancels any configuration changes that have been made but not yet committed, ensuring that the device returns to its previous stable state.

References:

? "rollback 0(rolls back the changes just made)" from Useful Juniper Commands.txt.

? Juniper official documentation: Rolling Back a Configuration.

NEW QUESTION 45

You are logged in to a Junos OS device with SSH and issued the show protocols | compare command in the configuration, but no output is shown. Which statement is correct in this scenario?

- A. The command only works for interface configuration differences.
- B. There are no changes to the candidate configuration.
- C. Someone accidentally deleted the active configuration.
- D. You must commit the configuration before any output will be shown.

Answer: B

Explanation:

The show | compare command in Junos OS is used to display the differences between the candidate configuration and the active configuration. If no output is shown when you issue this command, it means that there are no changes between the candidate configuration and the active configuration. This indicates that the candidate configuration is identical to the active configuration, and thus no differences are displayed.

Reference: Juniper Networks Documentation on Configuration Management

"The show | compare command displays the differences between the candidate configuration and the active configuration. If there are no changes, no output is displayed."

NEW QUESTION 48

How many login classes are assignable to a user account?

- A. 3
- B. 2
- C. 4
- D. 1

Answer: D

Explanation:

<https://www.juniper.net/documentation/us/en/software/junos/user-access-evo/user-access/topics/topic-map/junos-os-login-class.html#:~:text=You%20can%20define%20any%20number,to%20an%20individual%20user%20account.>


In Junos OS, each user account can be assigned only one login class. Login classes in Junos OS define the permissions for users, controlling what they can access and modify within the system. This setup helps in maintaining a clear and secure access control mechanism.

Reference:

Junos OS Documentation on User Accounts and Login Classes.

NEW QUESTION 50

Click the Exhibit button.

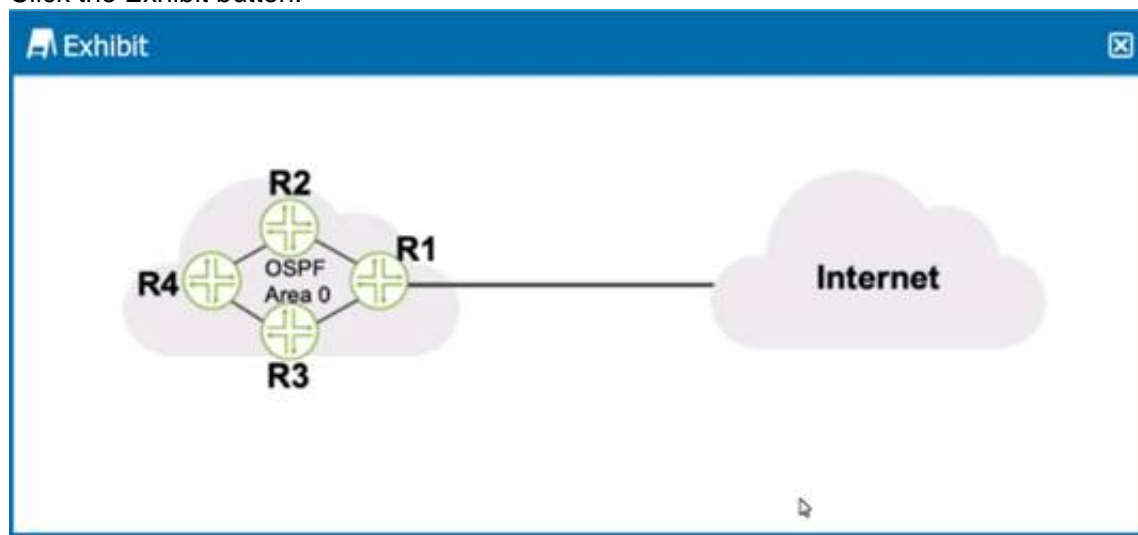

Referring to the exhibit, what should be configured on R1 to advertise a default static route into OSPF?

- A. a firewall filter
- B. a routing policy
- C. a loopback interface
- D. a management interface

Answer: B

Explanation:

To advertise a default static route into OSPF on router R1, a routing policy should be configured. This policy would typically include a statement to match the default route (0.0.0.0/0) and then apply an action to set the route as an OSPF external type, which would then be redistributed into the OSPF domain. The routing policy is a set of conditions and actions that determine how routes are imported into or exported from the routing table and how routes are shared between routing instances or routing protocols. After defining the policy, it must be applied to OSPF under the export section of the OSPF configuration on R1. This process will allow R1 to announce the default route to other OSPF routers in the network, which then can use it as a gateway of last resort to reach the Internet or other networks not explicitly known to the OSPF domain.

NEW QUESTION 52

Which service does RADIUS provide?

- A. routing
- B. authentication
- C. DNS resolution
- D. time synchronization

Answer: B

Explanation:

RADIUS, which stands for Remote Authentication Dial-In User Service, provides authentication services for users trying to access a network. It is a networking protocol that provides centralized Authentication, Authorization, and Accounting (AAA) management for users who connect and use a network service.

NEW QUESTION 55

You are creating a new policy to accept and redistribute routes into your IGP.

In this scenario, which match criteria would you use to identify the route prefixes to select?

- A. instance
- B. route-type
- C. neighbor
- D. route-filter

Answer: D

Explanation:

When creating a new policy to accept and redistribute routes into your Interior Gateway Protocol (IGP), the route-filter match criteria is used to identify the route prefixes to select. The route-filter statement specifies which prefixes should be matched in a policy. This allows for precise control over which routes are accepted and redistributed, facilitating efficient and secure routing policies within the network.

References:

? "show | display set | match ge-0/0/2" indicating command examples and match criteria from Useful Juniper Commands.txt.

? Juniper official documentation: Routing Policy and Firewall Filters Configuration Guide.

NEW QUESTION 58

Exhibit

```
{hold:node0}[edit]
```

```
root# set system root-authentication ?
```

Possible completions:

+ apply-groups Groups from which to inherit configuration data

+ apply-groups-except Don't inherit configuration data from these groups

encrypted-password Encrypted password string

load-key-file File (URL) containing one or more ssh keys

plain-text-password Prompt for plain text password (autoencrypted)

```
> ssh-dsa Secure shell (ssh) DSA public key string
```

```
> ssh-rsa Secure shell (ssh) RSA public key string
```

```
{hold:node0}[edit]
```

```
root# set system root-authentication plain-text-password
```

New password:

Retype new password:

```
{hold:node0}[edit]
```

```
root# commit and-quit
```

```
[edit interfaces]
```

```
'ge-0/0/0'
```

HA management port cannot be configured

error: configuration check-out failed

```
{hold:node0}[edit]
```

```
root#
```

You are unable to remotely access your Juniper device using the CLI.

Referring to the exhibit, which command would you add to the existing configuration to enable remote CLI access?

A. load factory-default

B. set system root-authentication plain-text-password

C. set system services ssh

D. set system login idle-timeout 20

Answer: C

Explanation:

In Junos OS, remote access to the device's CLI is commonly facilitated through Secure Shell (SSH), a protocol providing secure command-line access over an insecure network. The given exhibit indicates an attempt to set a root authentication password but does not show configuration for enabling remote access services. To enable SSH, which is not shown in the configuration snippet, you need to configure the device to accept SSH connections. This is done by enabling the SSH service within the system services hierarchy of the configuration. The correct command to add to the existing configuration for enabling remote CLI access via SSH is set system services ssh. This command activates the SSH service, allowing secure remote logins to the device.

NEW QUESTION 63

Which two components are included in a transport header? (Choose two.)

A. destination port number

B. source MAC address

C. source port number

D. destination MAC address

Answer: AC

Explanation:

The transport layer in the OSI model is responsible for end-to-end communication and error recovery. In a transport header, such as TCP or UDP, the key components include the source port number and the destination port number. These port numbers are used to identify sending and receiving applications. The source port number indicates the port of the sending application, and the destination port number refers to the port of the receiving application. MAC addresses, on the other hand, are part of the data link layer (Layer 2) and would be included in an Ethernet header, not a transport header.

NEW QUESTION 66

Which two statements are correct about firewall filters? (Choose two.)

A. "Discard" is the default action of packets that are not explicitly allowed.

B. There can be only one firewall filter.

C. "Accept" is the default action of packets that are not explicitly allowed.

D. There can be multiple firewall filters.

Answer: AD

Explanation:

In Juniper Networks devices, firewall filters are used to control packet flow through the device. The default action for packets that do not match any of the specified criteria in the firewall filter is to discard them, enhancing network security by ensuring that only explicitly allowed traffic can pass through. Furthermore, it is possible

to configure multiple firewall filters on a device, allowing for granular control over traffic based on various criteria such as source, destination, and protocol type.

NEW QUESTION 67

You need to recover the root password on a Junos router without losing the current configuration settings. Which three statements describe what you should perform in this scenario? (Choose three.)

- A. Enter and commit the new root password.
- B. Load the factory-default configuration.
- C. Upgrade the Junos OS to the latest version.
- D. Hit the space bar and enter recovery when prompted.
- E. Use a console connection to reboot the device.

Answer: ADE

Explanation:

To recover the root password on a Junos router without losing the configuration, you should (A) enter and commit the new root password once you have gained access to the system, (D) hit the space bar to interrupt the boot process and enter recovery mode when prompted during the boot process, and (E) use a console connection to reboot the device and access the bootloader prompt. These steps allow you to reset the root password while preserving the existing configuration.

NEW QUESTION 72

When considering routing tables and forwarding tables, which two statements are correct? (Choose two.)

- A. The routing table is used by the RE to select the best route.
- B. The forwarding table stores all routes and prefixes from all protocols.
- C. The forwarding table is used by the RE to select the best route.
- D. The routing table stores all routes and prefixes from all protocols.

Answer: AD

Explanation:

The routing table and forwarding table play distinct roles in a Junos OS device. The correct answers are A and D. The routing table (A) is used by the Routing Engine (RE) to select the best route among all the learned routes, while the routing table (D) stores all routes and prefixes learned from all routing protocols. The forwarding table, in contrast, contains only the active routes chosen by the RE and is used by the Packet Forwarding Engine for actual packet forwarding.

NEW QUESTION 75

What information would you find using the CLI help command?

- A. hyperlinks for remediation actions
- B. a URL for accessing the technical documentation
- C. an explanation for specific system log error messages
- D. message of the day

Answer: C

Explanation:

The CLI help command in Junos OS provides assistance and explanations for commands, command options, and in some cases, specific system log error messages. By using the help command followed by specific keywords or messages, users can get detailed information and context for the commands they are using or errors they are encountering. This feature is particularly useful for understanding the purpose of commands, their syntax, and troubleshooting error messages that may appear in system logs.

NEW QUESTION 78

An administrator configures a router's interface with an IPv4 address and subnet mask. The administrator also confirms that this interface is in an up state. In this scenario, which two route types are created on the local router? (Choose two.)

- A. a static route
- B. a local route
- C. a dynamic route
- D. a direct route

Answer: BD

Explanation:

When an interface on a router is configured with an IPv4 address and is in an up state, two types of routes are automatically created in the routing table: a local route and a direct route, making B and D the correct answers. The local route represents the interface's IP address itself, indicating that the router can directly receive packets addressed to this IP. The direct route represents the subnet or network segment to which the interface is connected, indicating that the router can directly forward packets to destinations within this subnet.

NEW QUESTION 82

Which two statements are correct about the employee@Ri> prompt? (Choose two.)

- A. R1 is the hostname of your device.
- B. You are in operational mode.
- C. You are in configuration mode.
- D. You are at a shell prompt.

Answer: AB

Explanation:

In Junos OS, the prompt `employee@R1>` indicates the current context of the user interface. The 'R1' part of the prompt signifies the hostname of the device, which in this case is 'R1'. The absence of a '#' symbol at the end of the prompt suggests that the user is in operational mode, as opposed to configuration mode which is indicated by a prompt ending in '#'. Operational mode allows users to view the status of the device and execute operational commands, but does not allow for configuration changes.

NEW QUESTION 87

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your JN0-105 Exam with Our Prep Materials Via below:

<https://www.certleader.com/JN0-105-dumps.html>