

1Z0-062 Dumps

Oracle Database 12c: Installation and Administration

<https://www.certleader.com/1Z0-062-dumps.html>



NEW QUESTION 1

You conned using SQL Plus to the root container of a multitenant container database (CDB) with SYSDBA privilege. The CDB has several pluggable databases (PDBs) open in the read/write mode. There are ongoing transactions in both the CDB and PDBs.

What happens after issuing the SHUTDOWN TRANSACTIONAL statement?

- A. The shutdown proceeds immediately.
- B. The shutdown proceeds as soon as all transactions in the PDBs are either committed or rolled back.
- C. The shutdown proceeds as soon as all transactions in the CDB are either committed or rolled back.
- D. The shutdown proceeds as soon as all transactions in both the CDB and PDBs are either committed or rolled back.
- E. The statement results in an error because there are open PDBs.

Answer: B

Explanation:

* SHUTDOWN [ABORT | IMMEDIATE | NORMAL | TRANSACTIONAL [LOCAL]]

Shuts down a currently running Oracle Database instance, optionally closing and dismounting a database. If the current database is a pluggable database, only the pluggable database is closed. The consolidated instance continues to run. Shutdown commands that wait for current calls to complete or users to disconnect such as SHUTDOWN NORMAL and SHUTDOWN TRANSACTIONAL have a time limit that the SHUTDOWN command will wait. If all events blocking the shutdown have not occurred within the time limit, the shutdown command cancels with the following message: ORA-01013: user requested cancel of current operation

* If logged into a CDB, shutdown closes the CDB instance.

To shutdown a CDB or non CDB, you must be connected to the CDB or non CDB instance that you want to close, and then enter SHUTDOWN

Database closed. Database dismounted. Oracle instance shut down.

To shutdown a PDB, you must log into the PDB to issue the SHUTDOWN command. SHUTDOWN Pluggable Database closed. Note:

* Prerequisites for PDB Shutdown

When the current container is a pluggable database (PDB), the SHUTDOWN command can only be used if: The current user has SYSDBA, SYSOPER, SYSBACKUP, or SYSDG system privilege.

The privilege is either commonly granted or locally granted in the PDB.

The current user exercises the privilege using AS SYSDBA, AS SYSOPER, AS SYSBACKUP, or AS SYSDG at connect time.

To close a PDB, the PDB must be open.

NEW QUESTION 2

Which two are true concerning a multitenant container database with three pluggable database? (Choose two.)

- A. All administration tasks must be done to a specific pluggable database.
- B. The pluggable databases increase patching time.
- C. The pluggable databases reduce administration effort.
- D. The pluggable databases are patched together.
- E. Pluggable databases are only used for database consolidation.

Answer: CD

NEW QUESTION 3

The following parameters are set for your Oracle 12c database instance: OPTIMIZER_CAPTURE_SQL_PLAN_BASELINES=FALSE

OPTIMIZER_USE_SQL_PLAN_BASELINES=TRUE

You want to manage the SQL plan evolution task manually. Examine the following steps:


1. Set the evolve task parameters.
2. Create the evolve task by using the DBMS_SPM.CREATE_EVOLVE_TASK function.
3. Implement the recommendations in the task by using the DBMS_SPM.IMPLEMENT_EVOLVE_TASK function.
4. Execute the evolve task by using the DBMS_SPM.EXECUTE_EVOLVE_TASK function.
5. Report the task outcome by using the DBMS_SPM.REPORT_EVOLVE_TASK function. Identify the correct sequence of steps:

- A. 2, 4, 5
- B. 2, 1, 4, 3, 5
- C. 1, 2, 3, 4, 5
- D. 1, 2, 4, 5

Answer: B

Explanation:

* Evolving SQL Plan Baselines

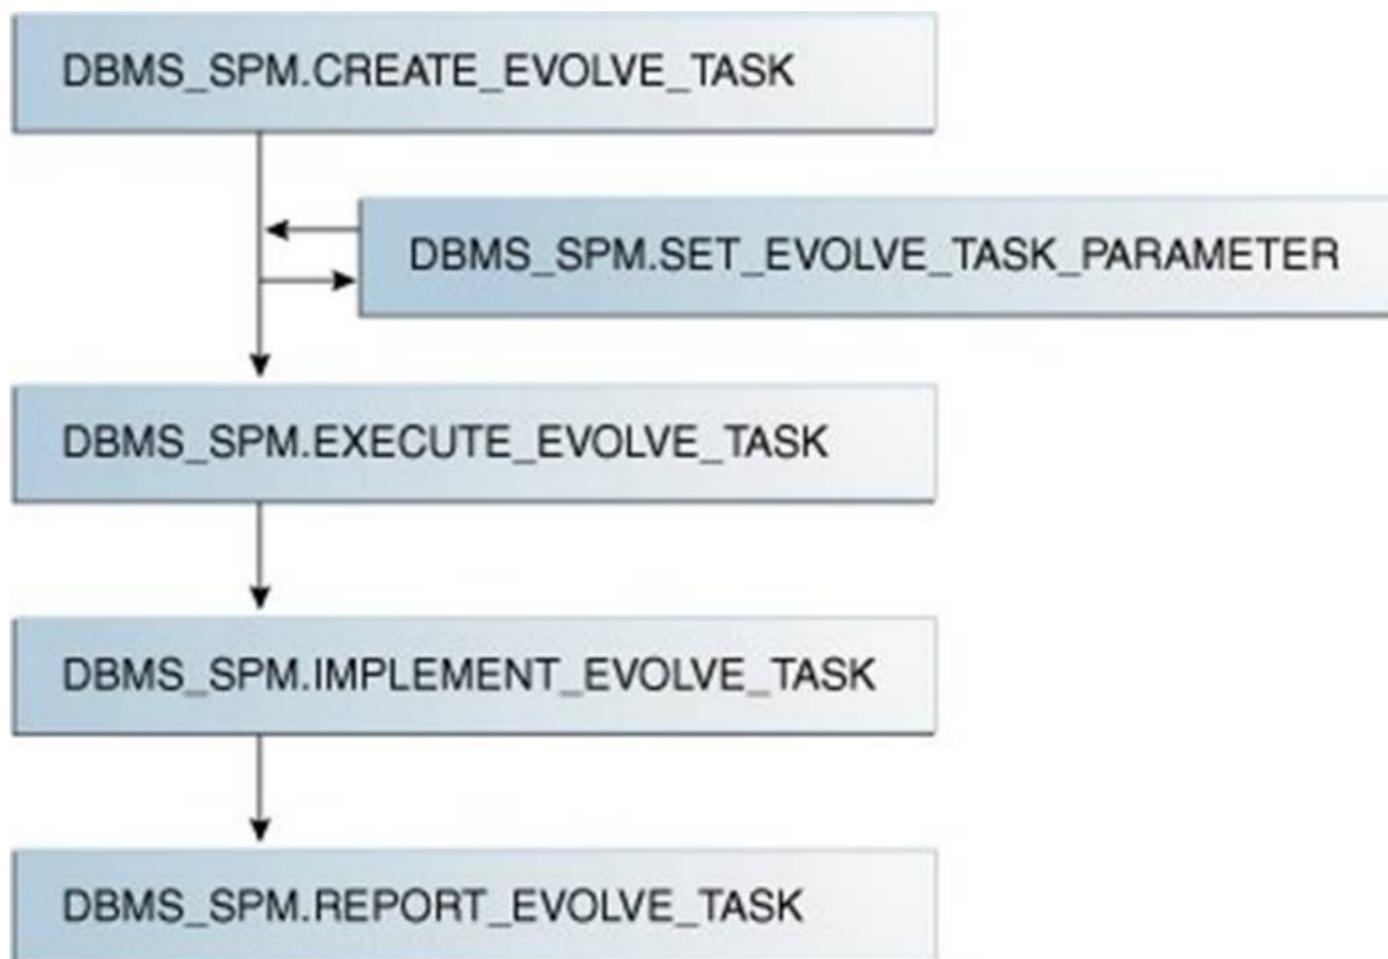

*2. Create the evolve task by using the DBMS_SPM.CREATE_EVOLVE_TASK function.

This function creates an advisor task to prepare the plan evolution of one or more plans for a specified SQL statement. The input parameters can be a SQL handle, plan name or a list of plan names, time limit, task name, and description.

1. Set the evolve task parameters. SET_EVOLVE_TASK_PARAMETER

This function updates the value of an evolve task parameter. In this release, the only valid parameter is TIME_LIMIT.

4. Execute the evolve task by using the DBMS_SPM.EXECUTE_EVOLVE_TASK function.

This function executes an evolution task. The input parameters can be the task name, execution name, and execution description. If not specified, the advisor generates the name, which is returned by the function.

3: IMPLEMENT_EVOLVE_TASK

This function implements all recommendations for an evolve task. Essentially, this function is equivalent to using ACCEPT_SQL_PLAN_BASELINE for all recommended plans. Input parameters include task name, plan name, owner name, and execution name.

5. Report the task outcome by using the DBMS_SPM_EVOLVE_TASK function.

This function displays the results of an evolve task as a CLOB. Input parameters include the task name and section of the report to include.

References:

NEW QUESTION 4

Which action takes place when a file checkpoint occurs?

- A. The checkpoint position is advanced in the checkpoint queue.
- B. All buffers for a checkpointed file that were modified before a specific SCN are written to disk by DBWn and the SCN is stored in the control file.
- C. The Database Writer process (DBWn) writes all dirty buffers in the buffer cache to data files.
- D. The Log Writer process (LGWR) writes all redo entries in the log buffer to online redo log file

Answer: B

NEW QUESTION 5

You configure your database Instance to support shared server connections.

Which two memory areas that are part of PGA are stored in SGA instead, for shared server connection? (Choose two.)

- A. User session data
- B. Stack space
- C. Private SQL area
- D. Location of the runtime area for DML and DDL Statements
- E. Location of a part of the runtime area for SELECT statements

Answer: AC

Explanation:

A: PGA itself is subdivided. The UGA (User Global Area) contains session state information, including stuff like package-level variables, cursor state, etc. Note that, with shared server, the UGA is in the SGA. It has to be, because shared server means that the session state needs to be accessible to all server processes, as any one of them could be assigned a particular session. However, with dedicated server (which likely what you're using), the UGA is allocated in the PGA.

C: The Location of a private SQL area depends on the type of connection established for a session. If a session is connected through a dedicated server, private SQL areas are located in the server process' PGA. However, if a session is connected through a shared server, part of the private SQL area is kept in the SGA.

Note:

* System global area (SGA)

The SGA is a group of shared memory structures, known as SGA components, that contain data and control information for one Oracle Database instance. The SGA is shared by all server and background processes. Examples of data stored in the SGA include cached data blocks and shared SQL areas.

* Program global area (PGA)

A PGA is a memory region that contains data and control information for a server process. It is nonshared memory created by Oracle Database when a server process is started. Access to the PGA is exclusive to the server process. There is one PGA for each server process. Background processes also allocate their own

PGAs. The total memory used by all individual PGAs is known as the total instance PGA memory, and the collection of individual PGAs is referred to as the total instance PGA, or just instance PGA. You use database initialization parameters to set the size of the instance PGA, not individual PGAs.

References:

NEW QUESTION 6

What happens if a maintenance window closes before a job that collects optimizer statistics completes?

- A. The job is terminated and the gathered statistics are not saved.
- B. The job is terminated but the gathered statistics are not published.
- C. The job continues to run until all statistics are gathered.
- D. The job is terminated and statistics for the remaining objects are collected the next time the maintenance window opens.

Answer: D

Explanation:

The `stop_on_window_close` attribute controls whether the `GATHER_STATS_JOB` continues when the maintenance window closes. The default setting for the `stop_on_window_close` attribute is `TRUE`, causing Scheduler to terminate `GATHER_STATS_JOB` when the maintenance window closes. The remaining objects are then processed in the next maintenance window.

References: https://docs.oracle.com/cd/B19306_01/server.102/b14211/stats.htm#g49431

NEW QUESTION 7

Which are two ways for a database service to be recognized by a listener in Oracle Database 12c? (Choose two.)

- A. Dynamic Registration by the LREG process
- B. Dynamic Registration by the SMON process
- C. Static registration in the listener.ora file using the `GLOBAL_DBNAME` parameter
- D. Dynamic Registration by the PMON process
- E. Static registration in the listener.ora file using the `SERVICE_NAME` parameter

Answer: AE

Explanation:

Reference: <https://docs.oracle.com/database/121/NETAG/listenercfg.htm#NETAG298>

NEW QUESTION 8

What are two benefits of installing Grid Infrastructure software for a stand-alone server before installing and creating an Oracle database?

- A. Effectively implements role separation
- B. Enables you to take advantage of Oracle Managed Files.
- C. Automatically registers the database with Oracle Restart.
- D. Helps you to easily upgrade the database from a prior release.
- E. Enables the Installation of Grid Infrastructure files on block or raw devices.

Answer: AC

Explanation:

C: To use Oracle ASM or Oracle Restart, you must first install Oracle Grid Infrastructure for a standalone server before you install and create the database. Otherwise, you must manually register the database with Oracle Restart.

Desupport of Block and Raw Devices

With the release of Oracle Database 11g release 2 (11.2) and Oracle RAC 11g release 2 (11.2), using Database Configuration Assistant or the installer to store Oracle Clusterware or Oracle Database files directly on block or raw devices is not supported.

If you intend to upgrade an existing Oracle RAC database, or an Oracle RAC database with Oracle ASM instances, then you can use an existing raw or block device partition, and perform a rolling upgrade of your existing installation.

Performing a new installation using block or raw devices is not allowed. References:

NEW QUESTION 9

You plan to migrate your database from a File system to Automata Storage Management (ASM) on same platform. Which two methods or commands would you use to accomplish this task? (Choose two.)

- A. RMAN CONVERT command
- B. Data Pump Export and import
- C. Conventional Export and Import
- D. The `BACKUP AS COPY DATABASE . . .` command of RMAN
- E. `DBMS_FILE_TRANSFER` with transportable tablespace

Answer: AD

Explanation:

A:

1. Get the list of all datafiles.

Note: RMAN Backup of ASM Storage

There is often a need to move the files from the file system to the ASM storage and vice versa. This may come in handy when one of the file systems is corrupted by some means and then the file may need to be moved to the other file system. D: Migrating a Database into ASM

* To take advantage of Automatic Storage Management with an existing database you must migrate that database into ASM. This migration is performed using Recovery Manager (RMAN) even if you are not using RMAN for your primary backup and recovery strategy.

* Example:

Back up your database files as copies to the ASM disk group. `BACKUP AS COPY INCREMENTAL LEVEL 0 DATABASEFORMAT '+DISK' TAG 'ORA_ASM_MIGRATION';`

References:

NEW QUESTION 10

In your multitenant container database (CDB) containing pluggable database (PDBs), the HR user executes the following commands to create and grant privileges on a procedure:

```
CREATE OR REPLACE PROCEDURE create_test_v (v_emp_id NUMBER, v_ename VARCHAR2, v_SALARY NUMBER, v_dept_id NUMBER)
BEGIN
INSERT INTO hr.test VALUES (V_emp_id, V_ename, V_salary, V_dept_id); END;
/
```

GRANT EXECUTE ON CREATE_TEST TO john, jim, smith, king;

How can you prevent users having the EXECUTE privilege on the CREATE_TEST procedure from inserting values into tables on which they do not have any privileges?

- A. Create the CREATE_TEST procedure with definer's rights.
- B. Grant the EXECUTE privilege to users with GRANT OPTION on the CREATE_TEST procedure.
- C. Create the CREATE_TEST procedure with invoker's rights.
- D. Create the CREATE_TEST procedure as part of a package and grant users the EXECUTE privilege the package.

Answer: C

Explanation:

If a program unit does not need to be executed with the escalated privileges of the definer, you should specify that the program unit executes with the privileges of the caller, also known as the invoker. Invoker's rights can mitigate the risk of SQL injection.

Incorrect:

Not A: By default, stored procedures and SQL methods execute with the privileges of their owner, not their current user. Such definer-rights subprograms are bound to the schema in which they reside.

not B: Using the GRANT option, a user can grant an Object privilege to another user or to PUBLIC.

NEW QUESTION 10

Which two statements correctly describe the relationship between data files and logical database structures? (Choose two.)

- A. A segment cannot span data files.
- B. A data file can belong to only one tablespace.
- C. An extent cannot span data files.
- D. The size of an Oracle data block in a data file should be the same as the size of an OS block.

Answer: BC

Explanation:

A single extent can never span data files. <https://docs.oracle.com/database/121/CNCPT/logical.htm#CNCPT1095>

NEW QUESTION 15

Examine the current value for the following parameters in your database instance: SGA_MAX_SIZE = 1024M

SGA_TARGET = 700M DB_8K_CACHE_SIZE = 124M LOG_BUFFER = 200M

You issue the following command to increase the value of DB_8K_CACHE_SIZE: SQL> ALTER SYSTEM SET DB_8K_CACHE_SIZE=140M;

Which statement is true?

- A. It fails because the DB_8K_CACHE_SIZE parameter cannot be changed dynamically.
- B. It succeeds only if memory is available from the autotuned components if SGA.
- C. It fails because an increase in DB_8K_CACHE_SIZE cannot be accommodated within SGA_TARGET.
- D. It fails because an increase in DB_8K_CACHE_SIZE cannot be accommodated within SGA_MAX_SIZE.

Answer: D

Explanation:

* The SGA_TARGET parameter can be dynamically increased up to the value specified for the SGA_MAX_SIZE parameter, and it can also be reduced.

* Example:

For example, suppose you have an environment with the following configuration: SGA_MAX_SIZE = 1024M

SGA_TARGET = 512M DB_8K_CACHE_SIZE = 128M

In this example, the value of SGA_TARGET can be resized up to 1024M and can also be reduced until one or more of the automatically sized components reaches its minimum size. The exact value depends on environmental factors such as the number of CPUs on the system. However, the value of

DB_8K_CACHE_SIZE remains fixed at all times at 128M

* DB_8K_CACHE_SIZE Size of cache for 8K buffers

* For example, consider this configuration: SGA_TARGET = 512M DB_8K_CACHE_SIZE = 128M

In this example, increasing DB_8K_CACHE_SIZE by 16 M to 144M means that the 16M is taken away from the automatically sized components. Likewise, reducing DB_8K_CACHE_SIZE by 16M to 112M means that the 16M is given to the automatically sized components.

NEW QUESTION 20

Examine this command:

```
SQL> ALTER SYSTEM SET ENABLE_DDL_LOGGING=TRUE;
```

Which two statements are true? (Choose two.)

- A. All data definition language (DDL) statements are written to the control file
- B. Some DDL statements are written to an XML file in the ADR home
- C. All DDL statements are logged in to a text file in Automatic Diagnostic Repository (ADR) home
- D. Some data definition language (DDL) statements are written to the control file
- E. Some DDL statements are written to a text file in the ADR home
- F. The Alert Log still contains some DDL statements

Answer: DE

NEW QUESTION 21

Which two statements are true concerning the Resource Manager plans for individual pluggable databases (PDB plans) in a multitenant container database (CDB)? (Choose two.)

- A. If no PDB plan is enabled for a pluggable database, then all sessions for that PDB are treated to an equal degree of the resource share of that PDB.
- B. In a PDB plan, subplans may be used with up to eight consumer groups.
- C. If a PDB plan is enabled for a pluggable database, then resources are allocated to consumer groups across all PDBs in the CDB.
- D. If no PDB plan is enabled for a pluggable database, then the PDB share in the CDB plan is dynamically calculated.
- E. If a PDB plan is enabled for a pluggable database, then resources are allocated to consumer groups based on the shares provided to the PDB in the CDB plan and the shares provided to the consumer groups in the PDB plan.

Answer: AE

Explanation:

A: Setting a PDB resource plan is optional. If not specified, all sessions within the PDB are treated equally.

*

In a non-CDB database, workloads within a database are managed with resource plans.

In a PDB, workloads are also managed with resource plans, also called PDB resource plans. The functionality is similar except for the following differences:

/ Non-CDBDatabase Multi-level resource plans Up to 32 consumer groups Subplans

/ PDBDatabase

Single-level resource plans only Up to 8 consumer groups

(not B) No subplans

NEW QUESTION 26

Which two statements are true about the RMAN validate database command? (Choose two.) A. It checks the database for intrablock corruptions.

- A. It can detect corrupt pfiles.
- B. It can detect corrupt spfiles.
- C. It checks the database for interblock corruptions.
- D. It can detect corrupt block change tracking files.

Answer: AC

Explanation:

Block corruptions can be divided into interblock corruption and intrablock corruption. In intrablock corruption, the corruption occurs within the block itself and can be either physical or logical corruption. In interblock corruption, the corruption occurs between blocks and can only be logical corruption.

(key word) * The VALIDATE command checks for intrablock corruptions only. Only DBVERIFY and the ANALYZE statement detect interblock corruption.

VALIDATE Command Output **> List of Control File and SPFILE. File TYPE >>> SPFILE or Control File.

Status >>> OK if no corruption, or FAILED if block corruption is found. Blocks Failing >>> The number of blocks that fail the corruption check. These blocks are newly corrupt.

Blocks Examined >>> Total number of blocks in the file. Oracle' Database Backup and Recovery User's Guide

12c Release 1 (12.1) - 16 Validating Database Files and Backups

NEW QUESTION 31

You execute the commands:

```
SQL>CREATE USER sidney
IDENTIFIED BY out_standing1
DEFAULT TABLESPACE users
QUOTA 10M ON users
TEMPORARY TABLESPACE temp
ACCOUNT UNLOCK;
```

```
SQL> GRANT CREATE SESSION TO sidney;
```

Which two statements are true? (Choose two.)

- A. The create user command fails if any role with the name Sidney exists in the database.
- B. The user Sidney can connect to the database instance but cannot perform sort operations because no space quota is specified for the temp tablespace.
- C. The user Sidney is created but cannot connect to the database instance because no profile is default.
- D. The user Sidney can connect to the database instance but requires relevant privileges to create objects in the users tablespace.
- E. The user Sidney is created and authenticated by the operating system.

Answer: AD

NEW QUESTION 33

Which task would you recommend before using the Database Upgrade Assistant (DBUA) to upgrade a single-instance Oracle 11g R2 database to Oracle Database 12c?

- A. shutting down the database instance that is being upgraded
- B. executing the catctl.pl script to run the upgrade processes in parallel
- C. running the Pre-Upgrade Information Tool
- D. copying the listener.ora file to the new ORACLE_HOME

Answer: C

Explanation:

References:

http://docs.oracle.com/cd/E11882_01/server.112/e23633/upgrade.htm#UPGRD12395

NEW QUESTION 36

You administer an online transaction processing (OLTP) system whose database is stored in Automatic Storage Management (ASM) and whose disk group use normal redundancy.

One of the ASM disks goes offline, and is then dropped because it was not brought online before DISK_REPAIR_TIME elapsed.

When the disk is replaced and added back to the disk group, the ensuing rebalance operation is too slow.

Which two recommendations should you make to speed up the rebalance operation if this type of failure happens again? (Choose two.)

- A. Increase the value of the ASM_POWER_LIMIT parameter.
- B. Set the DISK_REPAIR_TIME disk attribute to a lower value.
- C. Specify the statement that adds the disk back to the disk group.
- D. Increase the number of ASMB processes.
- E. Increase the number of DBWR_IO_SLAVES in the ASM instance.

Answer: AD

Explanation:

A: ASM_POWER_LIMIT specifies the maximum power on an Automatic Storage Management instance for disk rebalancing. The higher the limit, the faster rebalancing will complete. Lower values will take longer, but consume fewer processing and I/O resources.

D:

* Normally a separate process is fired up to do that rebalance. This will take a certain amount of time. If you want it to happen faster, fire up more processes. You tell ASM it can add more processes by increasing the rebalance power.

* ASMB

ASM Background Process

Communicates with the ASM instance, managing storage and providing statistics Incorrect:

Not B: A higher, not a lower, value of DISK_REPAIR_TIME would be helpful here.

Not E: If you implement database writer I/O slaves by setting the DBWR_IO_SLAVES parameter, you configure a single (master) DBWR process that has slave processes that are subservient to it. In addition, I/O slaves can be used to "simulate" asynchronous I/O on platforms that do not support asynchronous I/O or implement it inefficiently. Database I/O slaves provide non-blocking, asynchronous requests to simulate asynchronous I/O.

NEW QUESTION 40

To implement Automatic Management (AMM), you set the following parameters:

```
MEMORY_MAX_TARGET=600M
SGA_MAX_SIZE=500M
MEMORY_TARGET=600M
OPEN_CURSORS=300
SGA_TARGET=300M
PROCESSES=150
STATISTICS_LEVEL=BASIC
PGA_AGGREGATE_TARGET=0
```

When you try to start the database instance with these parameter settings, you receive the following error message: SQL > startup ORA-00824: cannot set SGA_TARGET or MEMORY_TARGET due to existing internal settings, see alert log for more information.

Identify the reason the instance failed to start.

- A. The PGA_AGGREGATE_TARGET parameter is set to zero.
- B. The STATISTICS_LEVEL parameter is set to BASIC.
- C. Both the SGA_TARGET and MEMORY_TARGET parameters are set.
- D. The SGA_MAX_SIZE and SGA_TARGET parameter values are not equal.

Answer: B

Explanation:

Example:

SQL> startup force

ORA-00824: cannot set SGA_TARGET or MEMORY_TARGET due to existing internal settings ORA-00848: STATISTICS_LEVEL cannot be set to BASIC with SGA_TARGET or MEMORY_TARGET

NEW QUESTION 43

A database is open READ WRITE and the instance has multiple sessions some of which have active transactions.

You execute this command:

SQL> ALTER SYSTEM ENABLE RESTRICTED SESSION;

Which three are true about the active transactions? (Choose three.)

- A. They may issue COMMIT OR ROLLBACK statements
- B. They are suspended and unable to issue any statements
- C. They may continue to issue DML statements
- D. They are rolled back automatically
- E. They may continue to issue queries
- F. They are terminated immediately

Answer: BDF

NEW QUESTION 44

Which three statements are true about adaptive SQL plan management? (Choose three.)

- A. It automatically performs verification or evolves non-accepted plans, in COMPREHENSIVE mode when they perform better than existing accepted plans.
- B. The optimizer always uses the fixed plan, if the fixed plan exists in the plan baseline.
- C. It adds new, better plans automatically as fixed plans to the baseline.
- D. The non-accepted plans are automatically accepted and become usable by the optimizer if they perform better than the existing accepted plans.
- E. The non-accepted plans in a SQL plan baseline are automatically evolved, in COMPREHENSIVE mode, during the nightly maintenance window and a persistent verification report is generated.

Answer: ADE

Explanation:

With adaptive SQL plan management, DBAs no longer have to manually run the verification or evolve process for non-accepted plans. When automatic SQL tuning is in COMPREHENSIVE mode, it runs a verification or evolve process for all SQL statements that have non-accepted plans during the nightly maintenance window. If the non-accepted plan performs better than the existing accepted plan (or plans) in the SQL plan baseline, then the plan is automatically accepted and becomes usable by the optimizer. After the verification is complete, a persistent report is generated detailing how the non-accepted plan performs compared to the accepted plan performance. Because the evolve process is now an AUTOTASK, DBAs can also schedule their own evolve job at end time.

Note:

* The optimizer is able to adapt plans on the fly by predetermining multiple subplans for portions of the plan.

* Adaptive plans, introduced in Oracle Database 12c, enable the optimizer to defer the final plan decision for a statement until execution time. The optimizer instruments its chosen plan (the default plan) with statistics collectors so that it can detect at runtime, if its cardinality estimates differ greatly from the actual number of rows seen by the operations in the plan. If there is a significant difference, then the plan or a portion of it will be automatically adapted to avoid suboptimal performance on the first execution of a SQL statement.

NEW QUESTION 45

Your database is open and the listener LISTENER is up. You issue the command: LSNRCTL> RELOAD
What is the effect of RELOAD on sessions that were originally established by LISTENER?

- A. Only sessions based on static listener registrations are disconnected.
- B. Existing connections are not disconnected; however, they cannot perform any operations until the listener completes the re-registration of the database instance and service handlers.
- C. The sessions are not affected and continue to function normally.
- D. All the sessions are terminated and active transactions are rolled back.

Answer: C

NEW QUESTION 50

You support Oracle Database 12c, Oracle Database 11g, and Oracle Database log on the same server. All databases of all versions use Automatic Storage Management (ASM).

Which three statements are true about the ASM disk group compatibility attributes that are set for a disk group? (Choose three.)

- A. The ASM compatibility attribute controls the format of the disk group metadata.
- B. RDBMS compatibility together with the database version determines whether a database instance can mount the ASM disk group.
- C. The RDBMS compatibility setting allows only databases set to the same version as the compatibility value, to mount the ASM disk group.
- D. The ASM compatibility attribute determines some of the ASM features that may be used by the Oracle disk group.
- E. The ADVM compatibility attribute determines the ACFS features that may be used by the Oracle 10g database.

Answer: ABD

Explanation:

AD: The value for the disk group COMPATIBLE.ASM attribute determines the minimum software version for an Oracle ASM instance that can use the disk group. This setting also affects the format of the data structures for the Oracle ASM metadata on the disk.

B: The value for the disk group COMPATIBLE.RDBMS attribute determines the minimum COMPATIBLE database initialization parameter setting for any database instance that is allowed to use the disk group. Before advancing the COMPATIBLE.RDBMS attribute, ensure that the values for the COMPATIBLE initialization parameter for all of the databases that access the disk group are set to at least the value of the new setting for COMPATIBLE.RDBMS.

For example, if the COMPATIBLE initialization parameters of the databases are set to either 11.1 or 11.2, then COMPATIBLE.RDBMS can be set to any value between 10.1 and 11.1 inclusively.

Not E:

/The value for the disk group COMPATIBLE.ADVM attribute determines whether the disk group can contain Oracle ASM volumes. The value must be set to 11.2 or higher. Before setting this attribute, the COMPATIBLE.ASM value must be 11.2 or higher. Also, the Oracle ADVM volume drivers must be loaded in the supported environment.

/ You can create an Oracle ASM Dynamic Volume Manager (Oracle ADVM) volume in a disk group. The volume device associated with the dynamic volume can then be used to host an Oracle ACFS file system.

The compatibility parameters COMPATIBLE.ASM and COMPATIBLE.ADVM must be set to 11.2 or higher for the disk group.

Note:

* The disk group attributes that determine compatibility are COMPATIBLE.ASM, COMPATIBLE.RDBMS, and COMPATIBLE.ADVM. The COMPATIBLE.ASM and COMPATIBLE.RDBMS attribute settings determine the minimum Oracle Database software version numbers that a system can use for Oracle ASM and the database instance types respectively. For example, if the Oracle ASM compatibility setting is 11.2, and RDBMS compatibility is set to 11.1, then the Oracle ASM software version must be at least 11.2, and the Oracle Database client software version must be at least 11.1. The COMPATIBLE.ADVM attribute determines whether the Oracle ASM Dynamic Volume Manager feature can create a volume in a disk group.

NEW QUESTION 55

To enable the Database Smart Flash Cache, you configure the following parameters: DB_FLASH_CACHE_FILE = '/dev/flash_device_1', '/dev/flash_device_2'
DB_FLASH_CACHE_SIZE=64G

What is the result when you start up the database instance?

- A. It results in an error because these parameter settings are invalid.
- B. One 64G flash cache file will be used.
- C. Two 64G flash cache files will be used.
- D. Two 32G flash cache files will be used.

Answer: A

NEW QUESTION 60

Your multitenant container database (CDB) contains a pluggable database, HR_PDB. The default permanent tablespace in HR_PDB is USERDATA. The container database (CDB) is open and you connect RMAN.

You want to issue the following RMAN command: RMAN > BACKUP TABLESPACE hr_pdb:userdata;

Which task should you perform before issuing the command?

- A. Place the root container in ARCHIVELOG mode.
- B. Take the user data tablespace offline.
- C. Place the root container in the nomount stage.
- D. Ensure that HR_PDB is open.

Answer: A

NEW QUESTION 64

Which two statements are true about the logical storage structure of an Oracle database? (Choose two.)

- A. An extent contains data blocks that are always physically contiguous on disk.
- B. An extent can span multiple segments.
- C. Each data block always corresponds to one operating system block.
- D. It is possible to have tablespaces of different block sizes.
- E. A data block is the smallest unit of I/O in data files.

Answer: DE

NEW QUESTION 67

Which three statements are true about a job chain? (Choose three.)

- A. It can contain a nested chain of jobs.
- B. It can be used to implement dependency-based scheduling.
- C. It cannot invoke the same program or nested chain in multiple steps in the chain.
- D. It cannot have more than one dependency.
- E. It can be executed using event-based or time-based schedules.

Answer: ABE

NEW QUESTION 72

You executed a DROP USER CASCADE on an Oracle 11g release 1 database and immediately realized that you forgot to copy the OCA.EXAM_RESULTS table to the OCP schema.

The RECYCLE_BIN enabled before the DROP USER was executed and the OCP user has been granted the FLASHBACK ANY TABLE system privilege.

What is the quickest way to recover the contents of the OCA.EXAM_RESULTS table to the OCP schema?

- A. Execute FLASHBACK TABLE OCA.EXAM_RESULTS TO BEFORE DROP RENAME TO OCP.EXAM_RESULTS; connected as SYSTEM.
- B. Recover the table using traditional Tablespace Point In Time Recovery.
- C. Recover the table using Automated Tablespace Point In Time Recovery.
- D. Recover the table using Database Point In Time Recovery.
- E. Execute FLASHBACK TABLE OCA.EXAM_RESULTS TO BEFORE DROP RENAME TO EXAM_RESULTS; connected as the OCP user.

Answer: C

Explanation:

RMAN tablespace point-in-time recovery (TSPITR).

Recovery Manager (RMAN) TSPITR enables quick recovery of one or more tablespaces in a database to an earlier time without affecting the rest of the tablespaces and objects in the database.

Fully Automated (the default)

In this mode, RMAN manages the entire TSPITR process including the auxiliary instance. You specify the tablespaces of the recovery set, an auxiliary destination, the target time, and you allow RMAN to manage all other aspects of TSPITR.

The default mode is recommended unless you specifically need more control over the location of recovery set files after TSPITR, auxiliary set files during TSPITR, channel settings and parameters or some other aspect of your auxiliary instance.

NEW QUESTION 73

You are about to plug a multi-terabyte non-CDB into an existing multitenant container database (CDB). The characteristics of the non-CDB are as follows:

- Version: Oracle Database 11g Release 2 (11.2.0.2.0) 64-bit
- Character set: AL32UTF8
- National character set: AL16UTF16
- O/S: Oracle Linux 6 64-bit

The characteristics of the CDB are as follows:

- Version: Oracle Database 12c Release 1 64-bit
- Character Set: AL32UTF8
- National character set: AL16UTF16
- O/S: Oracle Linux 6 64-bit

Which technique should you use to minimize down time while plugging this non-CDB into the CDB?

- A. Transportable database
- B. Transportable tablespace
- C. Data Pump full export/import
- D. The DBMS_PDB package

E. RMAN

Answer: B

Explanation:

* Overview, example:

- Log into ncdb12c as sys
- Get the database in a consistent state by shutting it down cleanly.
- Open the database in read only mode
- Run DBMS_PDB.DESCRIBE to create an XML file describing the database.
- Shut down ncdb12c
- Connect to target CDB (CDB2)
- Check whether non-cdb (NCDB12c) can be plugged into CDB(CDB2)
- Plug-in Non-CDB (NCDB12c) as PDB(NCDB12c) into target CDB(CDB2).
- Access the PDB and run the noncdb_to_pdb.sql script.
- Open the new PDB in read/write mode.

* You can easily plug an Oracle Database 12c non-CDB into a CDB. Just create a PDB manifest file for the non-CDB, and then use the manifest file to create a cloned PDB in the CDB.

* Note that to plug in a non-CDB database into a CDB, the non-CDB database needs to be of version 12c as well. So existing 11g databases will need to be upgraded to 12c before they can be part of a 12c CDB.

NEW QUESTION 76

Which two statements are true about SQL*Loader Express Mode in an Oracle 12c database? (Choose two.)

- A. It loads data faster than conventional SQL*Loader
- B. No data file needs to be specified
- C. It can load data in parallel
- D. It loads data more efficiently than conventional SQL*Loader
- E. It requires Enterprise Manager Express to be configured

Answer: AC

Explanation:

Reference: <https://www.oracle.com/technetwork/database/enterprise-edition/learnmore/sqlldr-express-modewp-1991038.pdf>

NEW QUESTION 81

Your database is configured in ARCHIVELOG mode. Examine the RMAN configuration parameters:

```
CONFIGURE RETENTION POLICY TO REDUNDANCY 1; # default
CONFIGURE BACKUP OPTIMIZATION OFF; # default
CONFIGURE CONTROLFILE AUTOBACKUP OFF; # default
CONFIGURE DEVICE TYPE DISK PARALLELISM 1 BACKUP TYPE TO COPY;
CONFIGURE ARCHIVELOG BACKUP COPIES FOR DEVICE TYPE DISK TO 1; # default
```

Examine the command:

RMAN> BACKUP DATABASE PLUS ARCHIVELOG DELETE INPUT;

Which two are true? (Choose two.)

- A. It fails because the DELETE INPUT option can be used only with the BACKUP AS COPY command
- B. It creates image copies of the archive logs
- C. It creates a backupset of archive log files
- D. It creates image copies of the database files
- E. It fails because the DELETE INPUT option can be used only with the BACKUP AS BACKUPSET command

Answer: BE

NEW QUESTION 86

You run a script that completes successfully using SQL*Plus that performs these actions:

1. Creates a multitenant container database (CDB)
2. Plugs in three pluggable databases (PDBs)
3. Shuts down the CDB instance
4. Starts up the CDB instance using STARTUP OPEN READ WRITE

Which two statements are true about the outcome after running the script? (Choose two.)

- A. The seed will be in mount state.
- B. The seed will be opened read-only.
- C. The seed will be opened read/write.
- D. The other PDBs will be in mount state.
- E. The other PDBs will be opened read-only.
- F. The PDBs will be opened read/write.

Answer: BD

Explanation:

B: The seed is always read-only.

D: Pluggable databases can be started and stopped using SQL*Plus commands or the ALTER PLUGGABLE DATABASE command.

NEW QUESTION 91

Examine the following query output:

```
SQL> SELECT name, force_logging FROM v$database;
```

```
NAME          FORCE_LOGGING
-----
PROD          NO
```

You issue the following command to import tables into the hr schema:

```
$ > impdp hr/hr directory = dumpdir dumpfile = hr_new.dmp schemas=hr TRANSFORM=DISABLE_ARCHIVE_LOGGING: Y
```

Which statement is true?

- A. All database operations performed by the impdp command are logged.
- B. Only CREATE INDEX and CREATE TABLE statements generated by the import are logged.
- C. Only CREATE TABLE and ALTER TABLE statements generated by the import are logged.
- D. None of the operations against the master table used by Oracle Data Pump to coordinate its activities are logged.

Answer: C

Explanation:

Oracle Data Pump disable redo logging when loading data into tables and when creating indexes.

The new TRANSFORM option introduced in data pumps import provides the flexibility to turn off the redo generation for the objects during the course of import.

The Master Table is used to track the detailed progress information of a Data Pump job.

The Master Table is created in the schema of the current user running the Pump Dump export or import, and it keeps tracks of lots of detailed information.

NEW QUESTION 92

You create a new pluggable database, HR_PDB, from the seed database. Which three tablespaces are created by default in HR_PDB? (Choose three.)

- A. SYSTEM
- B. SYSAUX
- C. EXAMPLE
- D. UNDO
- E. TEMP
- F. USERS

Answer: ABE

Explanation:

* A PDB would have its SYSTEM, SYSAUX, TEMP tablespaces. It can also contain other user created tablespaces in it.

* Oracle Database creates both the SYSTEM and SYSAUX tablespaces as part of every database.

* tablespace_datafile_clauses

Use these clauses to specify attributes for all data files comprising the SYSTEM and SYSAUX tablespaces in the seed PDB.

Incorrect:

Not D: a PDB can not have an undo tablespace. Instead, it uses the undo tablespace belonging to the CDB. Note:

* Example:

```
CONN pdb_admin@pdb1
```

```
SELECT tablespace_name FROM dba_tablespaces; TABLESPACE_NAME
```

```
----- SYSTEM
```

```
SYSAUX TEMP USERS SQL>
```

NEW QUESTION 93

You execute the following commands to audit database activities:

```
SQL > ALTER SYSTEM SET AUDIT_TRIAL=DB, EXTENDED SCOPE=SPFILE;
```

```
SQL > AUDIT SELECT TABLE, INSERT TABLE, DELETE TABLE BY JOHN By SESSION WHENEVER SUCCESSFUL;
```

Which statement is true about the audit record that generated when auditing after instance restarts?

- A. One audit record is created for every successful execution of a SELECT, INSERT OR DELETE command on a table, and contains the SQL text for the SQL Statements.
- B. One audit record is created for every successful execution of a SELECT, INSERT OR DELETE command, and contains the execution plan for the SQL statements.
- C. One audit record is created for the whole session if john successfully executes a SELECT, INSERT, or DELETE command, and contains the execution plan for the SQL statements.
- D. One audit record is created for the whole session if JOHN successfully executes a select command, and contains the SQL text and bind variables used.
- E. One audit record is created for the whole session if john successfully executes a SELECT, INSERT, or DELETE command on a table, and contains the execution plan, SQL text, and bind variables used.

Answer: A

Explanation:

Note:

* BY SESSION

In earlier releases, BY SESSION caused the database to write a single record for all SQL statements or operations of the same type executed on the same schema objects in the same session. Beginning with this release (11g) of Oracle Database, both BY SESSION and BY ACCESS cause Oracle Database to write one audit record for each audited statement and operation.

* BY ACCESS

Specify BY ACCESS if you want Oracle Database to write one record for each audited statement and operation. Note:

If you specify either a SQL statement shortcut or a system privilege that audits a data definition language (DDL) statement, then the database always audits by access. In all other cases, the database honors the BY SESSION or BY ACCESS specification.

* For each audited operation, Oracle Database produces an audit record containing this information:

/ The user performing the operation

/ The type of operation

/ The object involved in the operation
/ The date and time of the operation References:

NEW QUESTION 94

What is the effect of specifying the "ENABLE PLUGGABLE DATABASE" clause in a "CREATE DATABASE" statement?


- A. It will create a multitenant container database (CDB) with only the root opened.
- B. It will create a CDB with root opened and seed read only.
- C. It will create a CDB with root and seed opened and one PDB mounted.
- D. It will create a CDB that must be plugged into an existing CDB.
- E. It will create a CDB with root opened and seed mounted.

Answer: B

Explanation:

* The CREATE DATABASE ... ENABLE PLUGGABLE DATABASE SQL statement creates a new CDB. If you do not specify the ENABLE PLUGGABLE DATABASE clause, then the newly created database is a non-CDB and can never contain PDBs.

Along with the root (CDB\$ROOT), Oracle Database automatically creates a seed PDB (PDB\$SEED). The following graphic shows a newly created CDB:

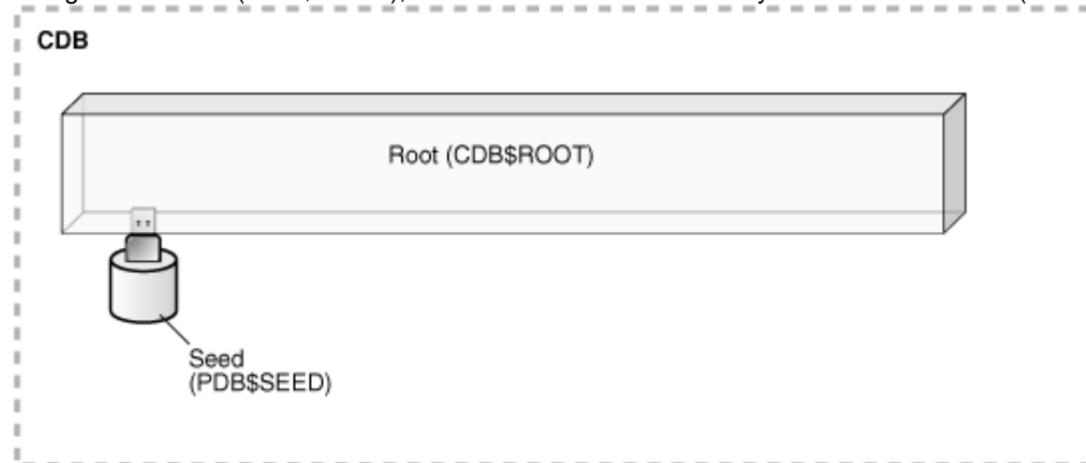

* Creating a PDB

Rather than constructing the data dictionary tables that define an empty PDB from scratch, and then populating its Obj\$ and Dependency\$ tables, the empty PDB is created when the CDB is created. (Here, we use empty to mean containing no customer-created artifacts.) It is referred to as the seed PDB and has the name PDB\$Seed. Every CDB non-negotiably contains a seed PDB; it is non-negotiably always open in read-only mode. This has no conceptual significance; rather, it is just an optimization device. The create PDB operation is implemented as a special case of the clone PDB operation.

NEW QUESTION 95

You must track all transactions that modify certain tables in the sales schema for at least three years. Automatic undo management is enabled for the database with a retention of one day.

Which two must you do to track the transactions? (Choose two.)

- A. Enable supplemental logging for the database.
- B. Specify undo retention guarantee for the database.
- C. Create a Flashback Data Archive in the tablespace where the tables are stored.
- D. Create a Flashback Data Archive in any suitable tablespace.
- E. Enable Flashback Data Archiving for the tables that require tracking.

Answer: DE

Explanation:

E: By default, flashback archiving is disabled for any table. You can enable flashback archiving for a table if you have the FLASHBACK ARCHIVE object privilege on the Flashback Data Archive that you want to use for that table.

D: Creating a Flashback Data Archive

/ Create a Flashback Data Archive with the CREATEFLASHBACK ARCHIVE statement, specifying the following: Name of the Flashback Data Archive

Name of the first tablespace of the Flashback Data Archive

(Optional) Maximum amount of space that the Flashback Data Archive can use in the first tablespace

/ Create a Flashback Data Archive named fla2 that uses tablespace tbs2, whose data will be retained for two years: CREATEFLASHBACK ARCHIVE fla2 TABLESPACE tbs2 RETENTION 2 YEAR;

NEW QUESTION 99

You created a new database using the "create database" statement without specifying the "ENABLE PLUGGABLE" clause.

What are two effects of not using the "ENABLE PLUGGABLE database" clause?


- A. The database is created as a non-CDB and can never contain a PDB.
- B. The database is treated as a PDB and must be plugged into an existing multitenant container database (CDB).
- C. The database is created as a non-CDB and can never be plugged into a CDB.
- D. The database is created as a non-CDB but can be plugged into an existing CDB.
- E. The database is created as a non-CDB but will become a CDB whenever the first PDB is plugged in.

Answer: AD

Explanation:

A (not B,not E): The CREATE DATABASE ... ENABLE PLUGGABLE DATABASE SQL statement creates a new CDB. If you do not specify the ENABLE PLUGGABLE DATABASE clause, then the newly created database is a non- CDB and can never contain PDBs.

D: You can create a PDB by plugging in a Non-CDB as a PDB. The following graphic depicts the options for creating a PDB:

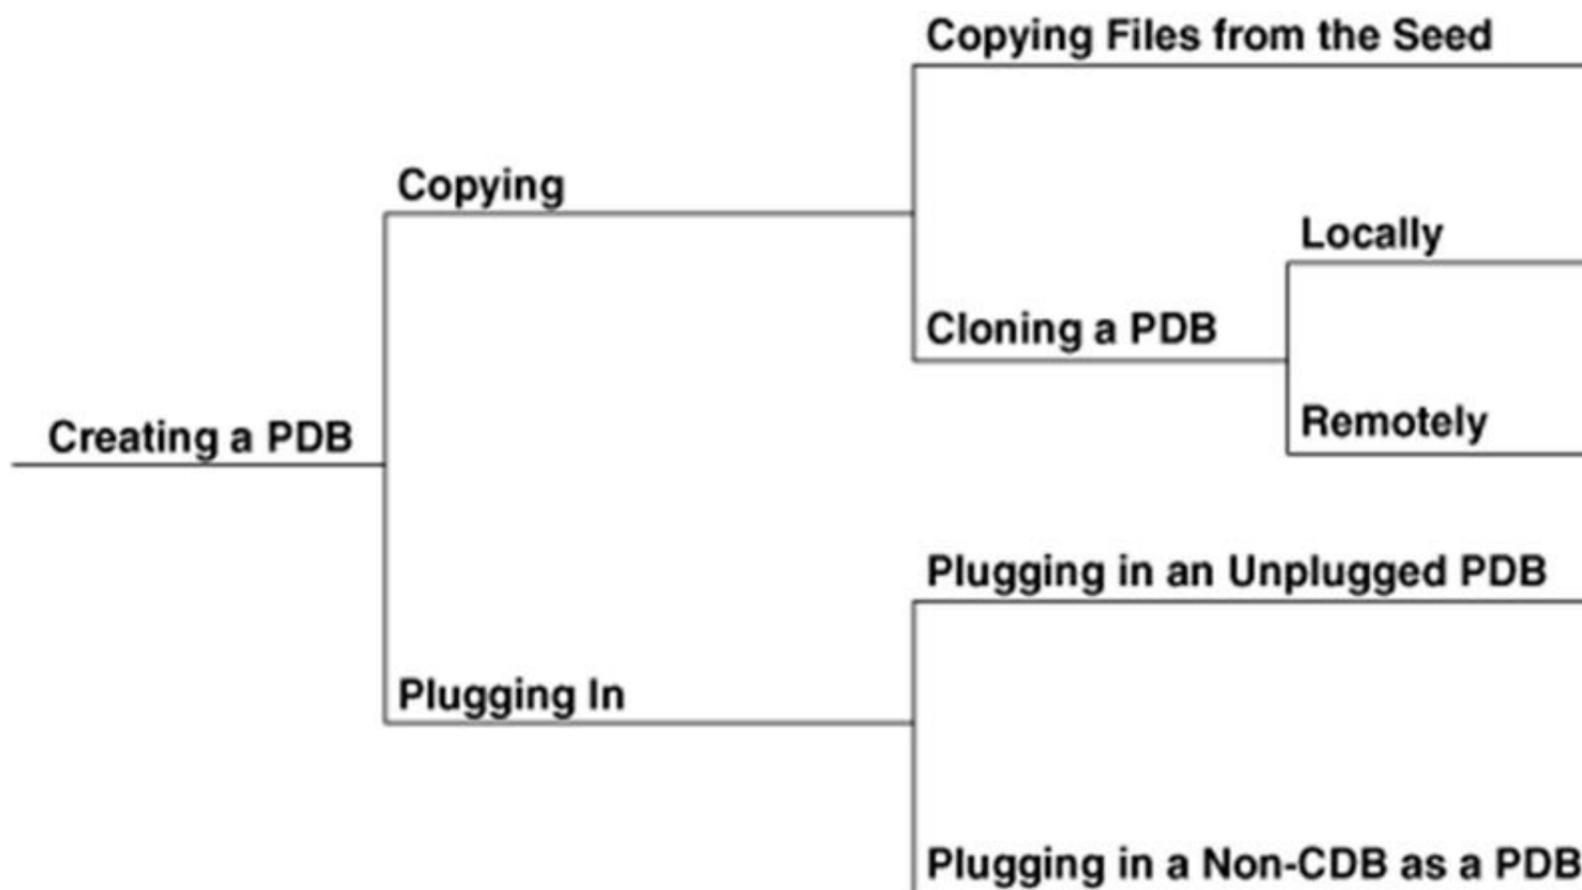

Incorrect:

Not E: For the duration of its existence, a database is either a CDB or a non-CDB. You cannot transform a non-CDB into a CDB or vice versa. You must define a database as a CDB at creation, and then create PDBs within this CDB.

NEW QUESTION 102

Which three statements are true about Automatic Workload Repository (AWR)? (Choose three.)

- A. All AWR tables belong to the SYSTEM schema.
- B. The AWR data is stored in memory and in the database.
- C. The snapshots collected by AWR are used by the self-tuning components in the database
- D. AWR computes time model statistics based on time usage for activities, which are displayed in the v\$SYS time model and V\$SESS_TIME_MODEL views.
- E. AWR contains system wide tracing and logging information.

Answer: BCD

NEW QUESTION 107

Which Oracle Database component is audited by default if the unified Auditing option is enabled?

- A. Oracle Data Pump
- B. Oracle Recovery Manager (RMAN)
- C. Oracle Label Security
- D. Oracle Database Vault
- E. Oracle Real Application Security

Answer: B

NEW QUESTION 111

What is the result of executing a TRUNCATE TABLE command on a table that has Flashback Archiving enabled?

- A. It fails with the ORA-665610 Invalid DDL statement on history-tracked message
- B. The rows in the table are truncated without being archived.
- C. The rows in the table are archived, and then truncated.
- D. The rows in both the table and the archive are truncate

Answer: C

NEW QUESTION 115

You want to schedule a job to rebuild a table's indexes after a bulk insert, which must be scheduled as soon as a file containing data arrives on the system. What would you do to accomplish this?

- A. Create a file watcher and an event-based job for bulk insert and then create another job to rebuild indexes on the table.
- B. Create a file watcher for the bulk inserts and then create a job to rebuild indexes.
- C. Create a job array and add a job for bulk insert and a job to rebuild indexes to the job array.
- D. Create an event-based job for the file arrival event, then create a job for bulk insert, and then create a job to rebuild indexes.

Answer: A

NEW QUESTION 118

Examine the commands executed to monitor database operations:

```
$> conn sys oracle/oracle@prod as sysdba SQL > VAR eid NUMBER
```

SQL > EXEC: eid := DBMS_SQL_MONITOR.BEGIN_OPERATION ('batch_job' , FORCED_TRACKING => 'Y');
Which two statements are true? (Choose two.)

- A. Database operations will be monitored only when they consume a significant amount of resource.
- B. Database operations for all sessions will be monitored.
- C. Database operations will be monitored only if the STATISTICS_LEVEL parameter is set to TYPICAL and CONTROL_MANAGEMENT_PACK_ACCESS is set DIAGNOSTIC + TUNING.
- D. Only DML and DDL statements will be monitored for the session.
- E. All subsequent statements in the session will be treated as one database operation and will be monitored.

Answer: CE

Explanation:

C: Setting the CONTROL_MANAGEMENT_PACK_ACCESS initialization parameter to DIAGNOSTIC+TUNING (default) enables monitoring of database operations. Real-Time SQL Monitoring is a feature of the Oracle Database Tuning Pack.

Note:
* The DBMS_SQL_MONITOR package provides information about Real-time SQL Monitoring and Real-time Database Operation Monitoring.

*(not B) BEGIN_OPERATION Function

starts a composite database operation in the current session.

/ (E) FORCE_TRACKING - forces the composite database operation to be tracked when the operation starts. You can also use the string variable 'Y'.

/ (not A) NO_FORCE_TRACKING - the operation will be tracked only when it has consumed at least 5 seconds of CPU or I/O time. You can also use the string variable 'N'.

NEW QUESTION 123

Examine the following commands for redefining a table with Virtual Private Database (VPD) policies:

```
BEGIN
  DBMS_RLS.ADD_POLICY (
    object_schema => 'hr',
    object_name   => 'employees',
    policy_name   => 'employees_policy',
    function_schema => 'hr',
    policy_function => 'auth_emp_dep_100',
    statement_types => 'select, insert, update, delete'
  );
END;
```

```
BEGIN
  DBMS_REDEFINITION.START_REDEF_TABLE (
    uname           => 'hr',
    orig_table      => 'employees',
    int_table       => 'int_employees',
    col_mapping     => NULL,
    options_flag    => DBMS_REDEFINITION.CONST_USE_PK,
    orderby_cols   => NULL,
    part_name      => NULL,
    copy_vpd_opt   => DBMS_REDEFINITION.CONST_VPD_AUTO);
END;
```

Which two statements are true about redefining the table? (Choose two.)

- A. All the triggers for the table are disabled without changing any of the column names or column types in the table.
- B. The primary key constraint on the EMPLOYEES table is disabled during redefinition.
- C. VPD policies are copied from the original table to the new table during online redefinition.
- D. You must copy the VPD policies manually from the original table to the new table during online redefinition.

Answer: BC

Explanation:

C (not D): CONS_VPD_AUTO

Used to indicate to copy VPD policies automatically

* DBMS_RLS.ADD_POLICY

/ The DBMS_RLS package contains the fine-grained access control administrative interface, which is used to implement Virtual Private Database (VPD).DBMS_RLS is available with the Enterprise Edition only.

Note:

* CONS_USE_PK and CONS_USE_ROWID are constants used as input to the "options_flag" parameter in both the START_REDEF_TABLE Procedure and CAN_REDEF_TABLE Procedure. CONS_USE_ROWID is used to indicate that the redefinition should be done using rowids while CONS_USE_PK implies that the redefinition should be done using primary keys or pseudo-primary keys (which are unique keys with all component columns having NOT NULL constraints).

* DBMS_REDEFINITION.START_REDEF_TABLE

To achieve online redefinition, incrementally maintainable local materialized views are used. These logs keep track of the changes to the master tables and are used by the materialized views during refresh synchronization.

* START_REDEF_TABLE Procedure

Prior to calling this procedure, you must manually create an empty interim table (in the same schema as the table to be redefined) with the desired attributes of the post-redefinition table, and then call this procedure to initiate the redefinition.

NEW QUESTION 124

Your production database uses file system storage. You want to move storage to Oracle Automatic Storage Management (ASM).

How would you achieve this?

- A. by using a transportable database
- B. by using the Database Upgrade Assistant (DBUA)
- C. by using Data Pump
- D. by using RMAN

Answer: D

Explanation:

References:
http://docs.oracle.com/cd/E11882_01/server.112/e18951.pdf (p.184)

NEW QUESTION 125

Which statement is true about Oracle Net Listener?

- A. It acts as the listening endpoint for the Oracle database instance for all local and non-local user connections.
- B. A single listener can service only one database instance and multiple remote client connections.
- C. Service registration with the listener is performed by the process monitor (PMON) process of each database instance.
- D. The listener.ora configuration file must be configured with one or more listening protocol addresses to allow remote users to connect to a database instance.
- E. The listener.ora configuration file must be located in the ORACLE_HOME/network/admin directly.

Answer: C

Explanation:

<https://docs.oracle.com/database/121/CNCPT/process.htm>

NEW QUESTION 126

The HR user executes the following query on the EMPLOYEES table but does not issue COMMIT, ROLLBACK, or any data definition language (DDL) command after that:

```
SQL> SELECT job
      FROM employees
      WHERE job='CLERK' FOR UPDATE OF empno;
```

HR then opens a second session.

Which two operations wait when executed in HR's second session? (Choose two.)

- A. LOCK TABLE employees IN EXCLUSIVE MODE;
- B. INSERT INTO employees(empno,ename) VALUES (1289, 'Dick');
- C. SELECT job FROM employees WHERE job='CLERK' FOR UPDATE OF empno;
- D. SELECT empno,ename FROM employees WHERE job='CLERK';
- E. INSERT INTO employees(empno,ename,job) VALUES (2001,'Harry','CLERK');

Answer: AC

NEW QUESTION 128

Examine the parameters for your database instance:

NAME	TYPE	VALUE
optimizer_adaptive_reporting_only	boolean	FALSE
optimizer_capture_sql_plan_baselines	boolean	FALSE
optimizer_dynamic_sampling	integer	2
optimizer_features_enable	string	12.1.0.1

Which three statements are true about the process of automatic optimization by using cardinality feedback? (Choose three.)

- A. The optimizer automatically changes a plan during subsequent execution of a SQL statement if there is a huge difference in optimizer estimates and execution statistics.
- B. The optimizer can CK optimize a query only once using cardinality feedback.
- C. The optimizer enables monitoring for cardinality feedback after the first execution of a query.
- D. The optimizer does not monitor cardinality feedback if dynamic sampling and multicolumn statistics are enabled.
- E. After the optimizer identifies a query as a re-optimization candidate, statistics collected by the collectors are submitted to the optimizer.

Answer: ACD

Explanation:

C: During the first execution of a SQL statement, an execution plan is generated as usual.
D: if multi-column statistics are not present for the relevant combination of columns, the optimizer can fall back on cardinality feedback. (not B)* Cardinality feedback. This feature, enabled by default in 11.2, is intended to improve plans for repeated executions.
optimizer_dynamic_sampling optimizer_features_enable
* dynamic sampling or multi-column statistics allow the optimizer to more accurately estimate selectivity of conjunctive predicates. Note:
* OPTIMIZER_DYNAMIC_SAMPLING controls the level of dynamic sampling performed by the optimizer. Range of values. 0 to 10
* Cardinality feedback was introduced in Oracle Database 11gR2. The purpose of this feature is to automatically improve plans for queries that are executed repeatedly, for which the optimizer does not estimate cardinalities in the plan properly. The optimizer may misestimate cardinalities for a variety of reasons, such

as missing or inaccurate statistics, or complex predicates. Whatever the reason for the misestimate, cardinality feedback may be able to help.

NEW QUESTION 133

Oracle Grid Infrastructure for a stand-alone server is installed on your production host before installing the Oracle Database server. The database and listener are configured by using Oracle Restart.

Examine the following command and its output:

```
$ crsctl config has CRS-4622: Oracle High Availability Services auto start is enabled. What does this imply?
```

- A. When you start an instance on a high with SQL*Plus dependent listeners and ASM disk groups are automatically started.
- B. When a database instance is started by using the SRVCTL utility and listener startup fails, the instance is still started.
- C. When a database is created by using SQL*Plus, it is automatically added to the Oracle Restart configuration.
- D. When you create a database service by modifying the SERVICE_NAMES initialization parameter, it is automatically added to the Oracle Restart configuration.

Answer: B

Explanation:

About Startup Dependencies

Oracle Restart ensures that Oracle components are started in the proper order, in accordance with component dependencies. For example, if database files are stored in Oracle ASM disk groups, then before starting the database instance, Oracle Restart ensures that the Oracle ASM instance is started and the required disk groups are mounted. Likewise, if a component must be shut down, Oracle Restart ensures that dependent components are cleanly shut down first.

Oracle Restart also manages the weak dependency between database instances and the Oracle Net listener (the listener): When a database instance is started, Oracle Restart attempts to start the listener. If the listener startup fails, then the database is still started. If the listener later fails, Oracle Restart does not shut down and restart any database instances. http://docs.oracle.com/cd/E16655_01/server.121/e17636/restart.htm#ADMIN12710

NEW QUESTION 137

Your multitenant container (CDB) containing three pluggable databases (PDBs) is running in ARCHIVELOG mode. You find that the SYSAUX tablespace is corrupted in the root container.

The steps to recover the tablespace are as follows:

1. Mount the CDB.
2. Close all the PDBs.
3. Open the database.
4. Apply the archive redo logs.
5. Restore the data file.
6. Take the SYSAUX tablespace offline.
7. Place the SYSAUX tablespace online.
8. Open all the PDBs with RESETLOGS.
9. Open the database with RESETLOGS.
10. Execute the command SHUTDOWN ABORT.

Which option identifies the correct sequence to recover the SYSAUX tablespace?

- A. 6, 5, 4, 7
- B. 10, 1, 2, 5, 8
- C. 10, 1, 2, 5, 4, 9, 8
- D. 10, 1, 5, 8, 10

Answer: A

Explanation:

```
RMAN> ALTER TABLESPACE sysaux OFFLINE IMMEDIATE; RMAN> RESTORE TABLESPACE sysaux;
```

```
RMAN> RECOVER TABLESPACE sysaux; RMAN> ALTER TABLESPACE sysaux ONLINE;
```

* Example:

While evaluating the 12c beta3 I was not able to do the recover while testing "all pdb files lost". Cannot close the pdb as the system datafile was missing...

So only option to recover was: Shutdown cdb (10) startup mount; (1)

```
restore pluggable database recover pluggable database alter database open; alter pluggable database name open;
```

Oracle support says: You should be able to close the pdb and restore/recover the system tablespace of PDB.

* Inconsistent backups are usually created by taking online database backups. You can also make an inconsistent backup by backing up data files while a database is closed, either:

/ Immediately after the crash of an Oracle instance (or, in an Oracle RAC configuration, all instances)

/ After shutting down the database using SHUTDOWN ABORT

Inconsistent backups are only useful if the database is in ARCHIVELOG mode and all archived redo logs created since the backup are available.

* Open the database with the RESETLOGS option after finishing recovery: SQL> ALTER DATABASE OPEN RESETLOGS;

NEW QUESTION 139

You use the segment advisor to help determine objects for which space may be reclaimed. Which three statements are true about the advisor given by the segment advisor? (Choose three.)

- A. It may advise the use of online table redefinition for tables in dictionary managed tablespace.
- B. It may advise the use of segment shrink for tables in dictionary managed tablespaces if the no chained rows.
- C. It may advise the use of online table redefinition for tables in locally managed tablespaces
- D. It will detect and advise about chained rows.
- E. It may advise the use of segment shrink for free list managed tables.

Answer: ACD

NEW QUESTION 143

You want to prevent a group of users in your database from performing long-running transactions that consume huge amounts of space in the undo tablespace. If the quota for these users is exceeded during execution of a data manipulation language (DML) statement, the operation should abort and return an error.

However, queries should still be allowed, even if users have exceeded the undo space limitation.

How would you achieve this?

- A. Specify the maximum amount of quota a user can be allocated in the undo tablespace.
- B. Decrease the number of Interested Transaction List (ITL) slots for the segments on which these users perform transactions.
- C. Implement a profile for these users.
- D. Implement a Database Resource Manager plan

Answer: D

NEW QUESTION 145

In your Database, the TBS PERCENT USED parameter is set to 60 and the TBS PERCENT FREE parameter is set to 20. Which two storage-tiering actions might be automated when using information Lifecycle Management (ILM) to automate data movement? (Choose two.)

- A. The movement of all segments to a target tablespace with a higher degree of compression, on a different storage tier, when the source tablespace exceeds TBS PERCENT USED
- B. Setting the target tablespace to read-only
- C. The movement of some segments to a target tablespace with a higher degree of compression, on a different storage tier, when the source tablespace exceeds TBS PERCENT USED
- D. Setting the target tablespace offline
- E. The movement of some blocks to a target tablespace with a lower degree of compression, on a different storage tier, when the source tablespace exceeds TBS PERCENT USED

Answer: BC

Explanation:

The value for TBS_PERCENT_USED specifies the percentage of the tablespace quota when a tablespace is considered full. The value for TBS_PERCENT_FREE specifies the targeted free percentage for the tablespace. When the percentage of the tablespace quota reaches the value of TBS_PERCENT_USED, ADO begins to move data so that percent free of the tablespace quota approaches the value of TBS_PERCENT_FREE. This action by ADO is a best effort and not a guarantee.

NEW QUESTION 148

Which two statements are true about Oracle Data Pump export and import operations? (Choose two.)

- A. You can detach from a data pump export job and reattach later.
- B. Data pump uses parallel execution server processes to implement parallel import.
- C. Data pump import requires the import file to be in a directory owned by the oracle owner.
- D. The master table is the last object to be exported by the data pump.
- E. You can detach from a data pump import job and reattach later.

Answer: AB

Explanation:

B: Data Pump can employ multiple worker processes, running in parallel, to increase job performance.
D: For export jobs, the master table records the location of database objects within a dump file set. / Export builds and maintains the master table for the duration of the job. At the end of an export job, the content of the master table is written to a file in the dump file set.
/ For import jobs, the master table is loaded from the dump file set and is used to control the sequence of operations for locating objects that need to be imported into the target database.

NEW QUESTION 149

Examine the query and its output executed in an RDBMS Instance:

```
SQL> SELECT * FROM v$pwfile_users;
```

USERNAME	SYSDB	SYSOP	SYSAS	SYSBA	SYSDBG	SYSKM	CON_ID
SYS	TRUE	TRUE	FALSE	FALSE	FALSE	FALSE	0
C##B_ADMIN	FALSE	FALSE	FALSE	TRUE	FALSE	FALSE	0
C##C_ADMIN	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	0
C##A_ADMIN	FALSE	FALSE	FALSE	FALSE	FALSE	TRUE	0
C##D_ADMIN	FALSE	FALSE	TRUE	FALSE	FALSE	FALSE	0

Which three statements are true about the users (other than sys) in the output? (Choose three.)

- A. The C ## B_ADMIN user can perform all backup and recovery operations using RMAN only.
- B. The C ## C_ADMIN user can perform the data guard operation with Data Guard Broker.
- C. The C ## A_ADMIN user can perform wallet operations.
- D. The C ## D_ADMIN user can perform backup and recovery operations for Automatic Storage Management (ASM).
- E. The C ## B_ADMIN user can perform all backup and recovery operations using RMAN or SQL* Plus.

Answer: BDE

Explanation:

B: SYSDBG administrative privilege has ability to perform Data Guard operations (including startup and shutdown) using Data Guard Broker or dgmgrl.
D: SYSASM
The new (introduced in 11g) SYSASM role to manage the ASM instance, variable extent sizes to reduce shared pool usage, and the ability of an instance to read from a specific disk of a diskgroup
E (Not A): SYSDBA is like a role in the sense that it is granted, but SYSDBA is a special built-in privilege to allow the DBA full control over the database
Incorrect:
Not C: SYSKM. SYSKM administrative privilege has ability to perform transparent data encryption wallet operations. Note: Use the V\$PWFILE_USERS view to see the users who have been granted administrative privileges.

NEW QUESTION 153

The DEFERRED_SEGMENT_CREATION parameter is set to TRUE in your database instance. You execute the following command to create a table:

```
SQL> CREATE TABLE acct1
      (ac_no NUMBER,
       ac_desc varchar2(25),
       amount number(10,2));
```

Which two statements are true? (Choose two.)

- A. The table is created without a segment because the storage clause is missing.
- B. A segment is allocated when the first row is inserted in the table.
- C. A segment is allocated when an index is created for any column in the table.
- D. The table is created and extents are immediately allocated as per the default storage defined for its tablespace.
- E. A segment is allocated for the table if the ALTER TABLE... ALLOCATE EXTENT command is issue

Answer: BE

NEW QUESTION 155

Examine the parameters for a database instance:

NAME	TYPE	VALUE
temp_undo_enabled	boolean	TRUE
undo_management	string	AUTO
undo_retention	integer	900
undo_tablespace	string	UNDOTBS1

Your database has three undo tablespaces and the default undo tablespace is not autoextensible. Resumable space allocation is not enabled for any sessions in the database instance.

What is the effect on new transactions when all undo space in the default undo tablespace is in use by active transactions?

- A. Transactions write their undo in the SYSTEM undo segment.
- B. Transactions fail.
- C. Transactions wait until space becomes available in UNDOTBS1.
- D. Transactions write their undo in a temporary tablespace.

Answer: B

Explanation:

References https://docs.oracle.com/cd/B19306_01/server.102/b14231/undo.htm (undo retention)

NEW QUESTION 160

Which three statements are true about the working of system privileges in a multitenant control database (CDB) that has pluggable databases (PDBs)? (Choose three.)

- A. System privileges apply only to the PDB in which they are used.
- B. Local users cannot use local system privileges on the schema of a common user.
- C. The granter of system privileges must possess the set container privilege.
- D. Common users connected to a PDB can exercise privileges across other PDBs.
- E. System privileges with the with grant option container all clause must be granted to a common user before the common user can grant privileges to other users.

Answer: ACE

Explanation:

A, Not D: In a CDB, PUBLIC is a common role. In a PDB, privileges granted locally to PUBLIC enable all local and common users to exercise these privileges in this PDB only.

C: A user can only perform common operations on a common role, for example, granting privileges commonly to the role, when the following criteria are met: The user is a common user whose current container is root.

The user has the SET CONTAINER privilege granted commonly, which means that the privilege applies in all containers.

The user has privilege controlling the ability to perform the specified operation, and this privilege has been granted commonly

Incorrect: Note:

* Every privilege and role granted to Oracle-supplied users and roles is granted commonly except for system privileges granted to PUBLIC, which are granted locally.

NEW QUESTION 162

You have altered a non-unique index to be invisible to determine if queries execute within an acceptable response time without using this index.

Which two are possible if table updates are performed which affect the invisible index columns? (Choose two.)

- A. The index remains invisible.
- B. The index is not updated by the DML statements on the indexed table.
- C. The index automatically becomes visible in order to have it updated by DML on the table.

- D. The index becomes unusable but the table is updated by the DML.
- E. The index is updated by the DML on the table.

Answer: AE

Explanation:

Unlike unusable indexes, an invisible index is maintained during DML statements. Note:

* Oracle 11g allows indexes to be marked as invisible. Invisible indexes are maintained like any other index, but they are ignored by the optimizer unless the OPTIMIZER_USE_INVISIBLE_INDEXES parameter is set to TRUE at the instance or session level. Indexes can be created as invisible by using the INVISIBLE keyword, and their visibility can be toggled using the ALTER INDEX command.

NEW QUESTION 164

Which two actions does an incremental checkpoint perform? (Choose two.)

- A. It signals CKPT to write the checkpoint position to the data file headers.
- B. It writes the checkpoint position to the data file headers.
- C. It advances the checkpoint position in the checkpoint queue.
- D. It writes the checkpoint position to the control file.

Answer: CD

Explanation:

References:

http://www.dba-oracle.com/t_incremental_checkpoint.htm

NEW QUESTION 169

In your Oracle 12c database, you plan to execute the command:

SQL> CREATE TABLESPACE tbs1 DATAFILE '/u02/oracle/data/tbs01.dbf' SIZE 50M; The u02 file system has 1 GB of free space available.

What is the outcome?

- A. It creates a locally managed tablespace with manual segment space management enabled.
- B. It raises an error because extent management is not specified.
- C. It creates a locally managed tablespace with automatic segment space management enabled.
- D. It creates a dictionary-managed tablespace with manual segment space management enabled.

Answer: C

Explanation:

References: https://docs.oracle.com/cd/B28359_01/server.111/b28310/tspaces002.htm#ADMIN11359

NEW QUESTION 170

You have just completed a manual upgrade of an Oracle 11g Database to Oracle Database 12c.

The Post-Upgrade Status Tool reports an INVALID status for some of the components after the upgrade. What must you do first in this situation to attempt to fix this problem?

- A. Run catuppst.sql to perform revalidation actions
- B. Run utluiobj.sql to filter out objects that were invalidated by the upgrade process.
- C. Run preupgrd.sql and then execute the generated "fix-up" scripts to resolve status issues.
- D. Run utlrp.sql to recompile stored PL/SQL and Java code and check the DBA_REGISTRY view

Answer: D

NEW QUESTION 174

Identify three benefits of Unified Auditing.

- A. Decreased use of storage to store audit trail rows in the database.
- B. It improves overall auditing performance.
- C. It guarantees zero-loss auditing.
- D. The audit trail cannot be easily modified because it is read-only.
- E. It automatically audits Recovery Manager (RMAN) events.

Answer: ABE

Explanation:

A: Starting with 12c, Oracle has unified all of the auditing types into one single unit called Unified auditing. You don't have to turn on or off all of the different auditing types individually and as a matter of fact auditing is enabled by default right out of the box. The AUD\$ and FGA\$ tables have been replaced with one single audit trail table. All of the audit data is now stored in Secure Files table thus improving the overall management aspects of audit data itself.

B: Further the audit data can also be buffered solving most of the common performance related problems seen on busy environments.

E: Unified Auditing is able to collect audit data for Fine Grained Audit, RMAN, Data Pump, Label Security, Database Vault and Real Application Security operations.

Note:

* Benefits of the Unified Audit Trail

The benefits of a unified audit trail are many:

/ (B) Overall auditing performance is greatly improved. The default mode that unified audit works is Queued Write mode. In this mode, the audit records are

batched in SGA queue and is persisted in a periodic way. Because the audit records are written to SGA queue, there is a significant performance improvement.

/ The unified auditing functionality is always enabled and does not depend on the initialization parameters that were used in previous releases

/ (A) The audit records, including records from the SYS audit trail, for all the audited components of your Oracle Database installation are placed in one location and in one format, rather than your having to look in different places to find audit trails in varying formats. This consolidated view enables auditors to co-relate audit information from different components. For example, if an error occurred during an INSERT statement, standard auditing can indicate the error number and the

SQL that was executed. Oracle Database Vault-specific information can indicate whether this error happened because of a command rule violation or realm violation. Note that there will be two audit records with a distinct AUDIT_TYPE. With this unification in place, SYS audit records appear with AUDIT_TYPE set to Standard Audit.

/ The management and security of the audit trail is also improved by having it in single audit trail.

/ You can create named audit policies that enable you to audit the supported components listed at the beginning of this section, as well as SYS administrative users. Furthermore, you can build conditions and exclusions into your policies.

* Oracle Database 12c Unified Auditing enables selective and effective auditing inside the Oracle database using policies and conditions. The new policy based syntax simplifies management of auditing within the database and provides the ability to accelerate auditing based on conditions.

* The new architecture unifies the existing audit trails into a single audit trail, enabling simplified management and increasing the security of audit data generated by the database.

NEW QUESTION 177

You enabled an audit policy by issuing the following statements:

```
SQL> AUDIT POLICY ORA_DATABASE_PARAMETER BY SCOTT;
```

```
SQL> AUDIT POLICY ORA_DATABASE_PARAMETER BY SYS, SYSTEM;
```

For which database users and for which executions is the audit policy now active? Select two.

- A. SYS, SYSTEM
- B. SCOTT
- C. Only for successful executions
- D. Only for failed executions
- E. Both successful and failed executions

Answer: AE

Explanation:

* The ORA_DATABASE_PARAMETER policy audits commonly used Oracle Database parameter settings. By default, this policy is not enabled.

NEW QUESTION 182

Which two statements are true about the use of the procedures listed in the v\$sysaux_occupants.move_procedure column? (Choose two.)

- A. The procedure may be used for some components to relocate component data to the SYSAUX tablespace from its current tablespace.
- B. The procedure may be used for some components to relocate component data from the SYSAUX tablespace to another tablespace.
- C. All the components may be moved into SYSAUX tablespace.
- D. All the components may be moved from the SYSAUX tablespace to another tablespace.

Answer: AB

NEW QUESTION 187

The user SCOTT owns the CUST table that is placed in the SALES tablespace. The user SCOTT opens a session and executes commands as follows:

```
SQL> INSERT INTO cust VALUES(101, 'JACK'); 1 row created. SQL> INSERT INTO cust VALUES(102, 'SMITH'); 1 row created.
```

As a DBA, you execute the following command from another session: ALTER TABLESPACE sales READ ONLY; Which statement is true regarding the effect of this command on the transaction in Scott's session?

- A. The command fails as a transaction is still pending.
- B. The transaction in Scott's session is rolled back and the tablespace becomes readonly.
- C. The command waits and the user SCOTT can execute data manipulation language (DML) statements only as part of the current transaction.
- D. The command hangs until all transactions on the objects in the tablespace commit or rollback, and then the tablespace is placed in readonly mode.

Answer: B

NEW QUESTION 190

Which three are direct benefits of the multiprocess, multithreaded architecture of Oracle Database 12c when it is enabled? (Choose three.)

- A. Reduced logical I/O
- B. Reduced virtual memory utilization
- C. Improved parallel Execution performance
- D. Improved Serial Execution performance
- E. Reduced physical I/O
- F. Reduced CPU utilization

Answer: BCF

Explanation:

* Multiprocess and Multithreaded Oracle Database Systems

Multiprocess Oracle Database (also called multiuser Oracle Database) uses several processes to run different parts of the Oracle Database code and additional Oracle processes for the users—either one process for each connected user or one or more processes shared by multiple users. Most databases are multiuser because a primary advantage of a database is managing data needed by multiple users simultaneously.

Each process in a database instance performs a specific job. By dividing the work of the database and applications into several processes, multiple users and applications can connect to an instance simultaneously while the system gives good performance.

* In previous releases, Oracle processes did not run as threads on UNIX and Linux systems. Starting in Oracle Database 12c, the multithreaded Oracle Database model enables Oracle processes to execute as operating system threads in separate address spaces.

NEW QUESTION 193

You use multiple temporary tables frequently in your database. Which two are benefits of configuring temporary undo? (Choose two.)

- A. Performance improves because less redo is written to the redo log.
- B. Temporary undo reduces the amount of undo stored in undo tablespaces.

- C. Performance improves because data manipulation language (DML) operations performed on temporary tables do not use the buffer cache.
D. Performance improves because no redo and undo are generated for the temporary table

Answer: AB

NEW QUESTION 194

Which three statements are true about Flashback Database? (Choose three.)

- A. Flashback logs are written sequentially, and are archived.
B. Flashback Database uses a restored control file to recover a database.
C. The Oracle database automatically creates, deletes, and resides flashback logs in the Fast Recovery Area.
D. Flashback Database can recover a database to the state that it was in before a reset logs operation.
E. Flashback Database can recover a data file that was dropped during the span of time of the flashback.
F. Flashback logs are used to restore to the blocks' before images, and then the redo data may be used to roll forward to the desired flashback time.

Answer: CDF

NEW QUESTION 198

Which two are prerequisites for performing a flashback transaction? (Choose two.)

- A. Flashback Database must be enabled.
B. Undo retention guarantee for the database must be configured.
C. EXECUTE privilege on the DBMS_FLASHBACK package must be granted to the user flashing back transaction.
D. Supplemental logging must be enabled.
E. Recycle bin must be enabled for the database.
F. Block change tracking must be enabled for the database.

Answer: BD

Explanation:

References: <http://searchoracle.techtarget.com/tip/How-to-perform-Oracle-Flashback-Transaction-Queries>
https://docs.oracle.com/cd/E11882_01/appdev.112/e41502/adfns_flashback.htm#ADFNS610

NEW QUESTION 201

The persistent configuration settings for RMAN have default for all parameters. Identify four RMAN commands that produce a multi-section backup.

- A. BACKUP TABLESPACE SYSTEM SECTION SIZE 100M;
B. BACKUP AS COPY TABLESPACE SYSTEM SECTION SIZE 100M;
C. BACKUP ARCHIVELOG ALL SECTION SIZE 25M;
D. BACKUP TABLESPACE "TEMP" SECTION SIZE 10M;
E. BACKUP TABLESPACE "UNDO" INCLUDE CURRENT CONTROLFILE SECTION SIZE 100M;
F. BACKUP SPFILE SECTION SIZE 1M;
G. BACKUP INCREMENTAL LEVEL 0 TABLESPACE SYSAUX SECTION SIZE 100M;

Answer: ABEG

NEW QUESTION 206

Which three statements are true about automated maintenance tasks? (Choose three.)

- A. They run at predefined time intervals that are intended to occur during a period of low system load.
B. An Oracle Scheduler job is created for each maintenance task that is scheduled to run in a maintenance window.
C. A maintenance window is automatically extended until all the maintenance tasks defined are completed.
D. A repository is maintained in the SYSTEM tablespace to store the history of execution of all tasks.
E. Predefined maintenance tasks consist of automatic optimizer statistics collection, running Automatic Segment Advisor, and running Automatic SQL Tuning Advisor.

Answer: ABE

Explanation:

References: https://docs.oracle.com/cd/E11882_01/server.112/e25494/tasks.htm#ADMIN12331

NEW QUESTION 209

Your database has the SRV1 service configured for an application that runs on middle-tier application server. The application has multiple modules. You enable tracing at the service level by executing the following command: SQL > exec DBMS_MONITOR.SERV_MOD_ACT_TRACE_ENABLE ('SRV1');
The possible outcome and actions to aggregate the trace files are as follows:

1. The command fails because a module name is not specified.
2. A trace file is created for each session that is running the SRV1 service.
3. An aggregated trace file is created for all the sessions that are running the SRV1 service.
4. The trace files may be aggregated by using the trcess utility.
5. The trace files be aggregated by using the tkprof utility.

Identify the correct outcome and the step to aggregate by using tkprof utility?

- A. 1
B. 2 and 4
C. 2 and 5
D. 3 and 4
E. 3 and 5

Answer: B

Explanation:

Tracing information is present in multiple trace files and you must use the trcsess tool to collect it into a single file. Incorrect:

Not 1: Parameter service_name

Name of the service for which tracing is enabled. module_name

Name of the MODULE. An optional additional qualifier for the service. Note:

* The procedure enables a trace for a given combination of Service, MODULE and ACTION name. The specification is strictly hierarchical: Service Name or Service Name/MODULE, or Service Name, MODULE, and ACTION name must be specified. Omitting a qualifier behaves like a wild-card, so that not specifying an ACTION means all ACTIONS. Using the ALL_ACTIONS constant achieves the same purpose.

* SERV_MOD_ACT_TRACE_ENABLE Procedure

This procedure will enable SQL tracing for a given combination of Service Name, MODULE and ACTION globally unless an instance_name is specified.

* DBMS_MONITOR.SERV_MOD_ACT_TRACE_ENABLE(service_name IN VARCHAR2,
module_name IN VARCHAR2 DEFAULT ANY_MODULE, action_name IN VARCHAR2 DEFAULT ANY_ACTION, waits IN BOOLEAN DEFAULT TRUE,
binds IN BOOLEAN DEFAULT FALSE,
instance_name IN VARCHAR2 DEFAULT NULL);

NEW QUESTION 213

You want to reduce fragmentation and reclaim unused space for the SALES table but not its dependent objects. During this operation, you want to ensure the following:

- A. Long-running queries are not affected.i
- B. No extra space is used.ii
- C. Data manipulation language (DML) operations on the table succeed at all times throughout the process.i
- D. Unused space is reclaimed both above and below the high water mar
- E. Which ALTER TABLE option would you recommend?
- F. DEALLOCATE UNUSED
- G. SHRINK SPACE CASCADE
- H. SHRINK SPACE COMPACT
- I. ROW STORE COMPRESS BASIC

Answer: C

Explanation:

References: https://docs.oracle.com/cd/B28359_01/server.111/b28310/schema003.htm

NEW QUESTION 217

Which three statements are true about Oracle Data Pump? (Choose three.)

- A. IMPDP can be used to change target data file names, schemas, and tablespaces during import.
- B. The DBMS_DATAPUMP PL/SQL package can be used independently of Data Pump clients to perform export and import operations.
- C. EXPDP and IMPDP are the client components of Oracle Data Pump.
- D. Oracle Data Pump export and import operations can be performed only by users with the SYSDBA privilege.
- E. IMPDP always use the conventional path insert method to import data.

Answer: ABC

Explanation:

References: https://docs.oracle.com/cd/E11882_01/server.112/e22490/dp_overview.htm#SUTIL2880

NEW QUESTION 222

Your database instance is started by using a server parameter file (SPFILE). You execute the following command to change the value of the LOG_BUFFER initialization parameter:

```
ALTER SYSTEM SET LOG_BUFFER=32 M;
```

What is the outcome of this command?

- A. The parameter value is changed and it comes into effect as soon as space becomes available in the SGA.
- B. It returns an error because the value of this parameter cannot be changed dynamically.
- C. The parameter value is changed and it comes into effect at the next instance startup.
- D. It returns an error because SCOPE should be set to MEMOR

Answer: B

NEW QUESTION 225

A database is stored in an Automatic Storage Management (ASM) disk group, disk group, DGROUP1 with SQL:

```
SQL> CREATE DISKGROUP dgroup1 NORMAL REDUNDANCY
      FAILGROUP controller1 DISK '/devices/diska1', '/devices/diska2'
      FAILGROUP controller2 DISK '/devices/diskb1', '/devices/diskb2';
```

There is enough free space in the disk group for mirroring to be done.

What happens if the CONTROLLER1 failure group becomes unavailable due to error of for maintenance?

- A. Transactions and queries accessing database objects contained in any tablespace stored in DGROUP1 will fall.
- B. Mirroring of allocation units will be done to ASM disks in the CONTROLLER2 failure group until the CONTROLLER1 for failure group is brought back online.
- C. The data in the CONTROLLER1 failure group is copied to the controller2 failure group and rebalancing is initiated.
- D. ASM does not mirror any data until the controller failure group is brought back online, and newly allocated primary allocation units (AU) are stored in the controller2 failure group, without mirroring.

E. Transactions accessing database objects contained in any tablespace stored in DGROUP1 will fail but queries will succeed.

Answer: D

NEW QUESTION 228

A database instance is started by using an SPFILE. The database is configured in ARCHIVELOG mode and the control file autobackup is configured. Daily full database backups are performed by using RMAN.

You lost all control files due to media failure.

Given the steps to recover from the error in random order:

1. Shut down the instance, if it is not already down.
2. Restore the control file from autobackup to a new location.
3. Start the database instance to NOMOUNT state.
4. Recover the database to the point of failure of the control file.
5. Open the database with the RESETLOGS option.
6. Mount the database.
7. Update the SPFILE with the new location of the control file by using the ALTER SYSTEM command. Identify the correct sequence of the required steps.

- A. 1, 3, 2, 6, 7, 4, 5
- B. 1, 3, 7, 2, 6, 4, 5
- C. 1, 3, 2, 4, 5
- D. 1, 2, 6, 4, 5
- E. 1, 6, 2, 4, 5

Answer: A

NEW QUESTION 232

Which three statements are true regarding the use of the Database Migration Assistant for Unicode (DMU)? (Choose three.)

- A. ADBA can check specific tables with the DMU
- B. The database to be migrated must be opened read-only.
- C. The release of the database to be converted can be any release since 9.2.0.8.
- D. The DMU can report columns that are too long in the converted character set.
- E. The DMU can report columns that are not represented in the converted character set.

Answer: ADE

Explanation:

A: In certain situations, you may want to exclude selected columns or tables from scanning or conversion steps of the migration process.

D: Exceed column limit

The cell data will not fit into a column after conversion. E: Need conversion

The cell data needs to be converted, because its binary representation in the target character set is different than the representation in the current character set, but neither length limit issues nor invalid representation issues have been found

* Oracle Database Migration Assistant for Unicode (DMU) is a unique next-generation migration tool providing an end-to-end solution for migrating your databases from legacy encodings to Unicode.

Incorrect:

Not C: The release of Oracle Database must be 10.2.0.4, 10.2.0.5, 11.1.0.7, 11.2.0.1, or later.

NEW QUESTION 236

On your Oracle Database, you issue the following commands to create indexes:

```
SQL > CREATE INDEX oe.ord_customer_ix1 ON oe.orders (customer_id, sales_rep_id) INVISIBLE; SQL> CREATE BITMAP INDEX oe.ord_customer_ix2 ON oe.orders (customer_id, sales_rep_id);
```

 Which two statements are true? (Choose two.)

- A. Only the ORD_CUSTOMER_IX1 index created.
- B. Both the indexes are updated when a row is inserted, updated, or deleted in the ORDERS table.
- C. Both the indexes are created: however, only ORD_CUSTOMERS_IX1 is used by the optimizer for queries on the ORDERS table.
- D. The ORD_CUSTOMER_IX1 index is not used by the optimizer even when the OPTIMIZER_USE_INVISIBLE_INDEXES parameters is set to true.
- E. Both the indexes are created and used by the optimizer for queries on the ORDERS table.
- F. Both the indexes are created: however, only ORD_CUSTOMERS_IX2 is used by the optimizer for queries on the ORDERS table.

Answer: BF

Explanation:

Not A: Both indexes are created fine.

B: The invisible index ORD_CUSTOMERS_IX1 and the bitmap index are both updated by DML operations on the Orders table.

F: Since ORD_CUSTOMERS_IX1 is invisible only ORD_CUSTOMERS_IX2 is used by the query optimizer. Not C, Not D, Not E:

* ord_customer_ix1 is an invisible index and is therefore not used by the optimizer.

* VISIBLE | INVISIBLE Use this clause to specify whether the index is visible or invisible to the optimizer. An invisible index is maintained by DML operations, but it is not used by the optimizer during queries unless you explicitly set the parameter OPTIMIZER_USE_INVISIBLE_INDEXES to TRUE at the session or system level. Note: Specify BITMAP to indicate that index is to be created with a bitmap for each distinct key, rather than indexing each row separately. Bitmap indexes store the rowids associated with a key value as a bitmap. Each bit in the bitmap corresponds to a possible rowid. If the bit is set, then it means that the row with the corresponding rowid contains the key value. The internal representation of bitmaps is best suited for applications with low levels of concurrent transactions, such as data warehousing.

NEW QUESTION 238

Which two statements are true when row archival management is enabled? (Choose two.)

- A. The ORA_ARCHIVE_STATE column visibility is controlled by the ROW ARCHIVAL VISIBILITY session parameter.
- B. The ORA_ARCHIVE_STATE column is updated manually or by a program that could reference activity tracking columns, to indicate that a row is no longer considered active.

- C. The ROW ARCHIVAL VISIBILITY session parameter defaults to active rows only.
- D. The ORA_ARCHIVE_STATE column is visible if referenced in the select list of a query.
- E. The ORA_ARCHIVE_STATE column is updated automatically by the Oracle Server based on activity tracking columns, to indicate that a row is no longer considered active.

Answer: CD

NEW QUESTION 243

You execute the following command to create a password file in the database server: \$ orapwd file = '+DATA/PROD/orapwprod entries = 5 ignorecase = N format = 12' Which two statements are true about the password file? (Choose two.)

- A. It records the usernames and passwords of users when granted the DBA role.
- B. It contains the usernames and passwords of users for whom auditing is enabled.
- C. Is used by Oracle to authenticate users for remote database administration.
- D. It records the usernames and passwords of all users when they are added to the OSDBA or OSOPER operating system groups.
- E. It supports the SYSBACKUP, SYSDG, and SYSKM system privilege

Answer: CE

NEW QUESTION 247

Your database instance has started using an SPFILE. Examine the RMAN configuration settings:

```
CONFIGURE RETENTION POLICY TO REDUNDANCY 1; # default
CONFIGURE BACKUP OPTIMIZATION OFF; # default
CONFIGURE DEFAULT DEVICE TYPE TO DISK; # default
CONFIGURE CONTROLFILE AUTOBACKUP ON;
CONFIGURE CONTROLFILE AUTOBACKUP FORMAT FOR DEVICE TYPE DISK TO '%F'; default
```

You execute the command:

```
RMAN> BACKUP AS COPY TABLESPACE TEST;
```

Which three types of files are backed up by using this command? (Choose three.)

- A. online redo log files
- B. control file
- C. SPFILE
- D. archived redo log files
- E. data file(s)
- F. PFILE

Answer: BCE

Explanation:

References:

<http://www.juliandyke.com/Research/RMAN/BackupCommand.php>

NEW QUESTION 251

Which three statements are true about space usage alerts? (Choose three.)

- A. Alerts are issued only when the critical threshold for space available in a tablespace is breached.
- B. The sum of active extents and allocated user quotas is considered to compute space usage for an undo tablespace.
- C. Database alerts can provide warnings about low space availability at both tablespace and segment levels.
- D. Alerts are not issued for locally managed tablespaces that are offline or in read-only mode.
- E. A newly created locally managed tablespace is automatically assigned the default threshold values defined for a database.

Answer: ADE

Explanation:

References: https://docs.oracle.com/cd/B28359_01/server.111/b28310/schema001.htm#ADMIN10120

NEW QUESTION 256

Which three activities are supported by the Data Recovery Advisor? (Choose three.)

- A. Advising on block checksum failures
- B. Advising on inaccessible control files
- C. Advising on inaccessible block change tracking files
- D. Advising on empty password files
- E. Advising on invalid block header field values

Answer: ABE

Explanation:

* Data Recovery Advisor can diagnose failures such as the following:

/ (B) Components such as datafiles and control files that are not accessible because they do not exist, do not have the correct access permissions, have been taken offline, and so on

/ (A, E) Physical corruptions such as block checksum failures and invalid block header field values

/ Inconsistencies such as a datafile that is older than other database files

/ I/O failures such as hardware errors, operating system driver failures, and exceeding operating system resource limits (for example, the number of open files)

* The Data Recovery Advisor automatically diagnoses corruption or loss of persistent data on disk, determines the appropriate repair options, and executes repairs

at the user's request. This reduces the complexity of recovery process, thereby reducing the Mean Time To Recover (MTTR).

NEW QUESTION 257

Your multitenant container database has three pluggable databases (PDBs): PDB1, PDB2, and PDB3. Which two RMAN commands may be used to back up only the PDB1 pluggable database? (Choose two.)

- A. BACKUP PLUGGABLE DATABASE PDB1 while connected to the root container
- B. BACKUP PLUGGABLE DATABASE PDB1 while connected to the PDB1 container
- C. BACKUP DATABASE while connected to the PDB1 container
- D. BACKUP DATABASE while connected to the boot container
- E. BACKUP PLUGGABLE database PDB1 while connected to PDB2

Answer: AC

Explanation:

To perform operations on a single PDB, you can connect as target either to the root or directly to the PDB.

* (A) If you connect to the root, you must use the PLUGGABLE DATABASE syntax in your RMAN commands. For example, to back up a PDB, you use the BACKUP PLUGGABLE DATABASE command.

* (C) If instead you connect directly to a PDB, you can use the same commands that you would use when connecting to a non-CDB. For example, to back up a PDB, you would use the BACKUP DATABASE command.

NEW QUESTION 258

Flashback is enabled for your multitenant container database (CDB), which contains two pluggable database (PDBs). A local user was accidentally dropped from one of the PDBs.

You want to flash back the PDB to the time before the local user was dropped. You connect to the CDB and execute the following commands:

```
SQL > SHUTDOWN IMMEDIATE SQL > STARTUP MOUNT
```

```
SQL > FLASHBACK DATABASE to TIME 'TO_DATE ('08/20/12' , 'MM/DD/YY)';
```

 Examine following commands:

1. ALTER PLUGGABLE DATABASE ALL OPEN;
2. ALTER DATABASE OPEN;
3. ALTER DATABASE OPEN RESETLOGS;

Which command or commands should you execute next to allow updates to the flashback back schema?

- A. Only 1
- B. Only 2
- C. Only 3
- D. 3 and 1
- E. 1 and 2

Answer: D

NEW QUESTION 262

Which statement is true about profiles?

- A. Resource limits specified in a profile assigned to a user are always enabled.
- B. A user can exist without any profile.
- C. A profile can be assigned only to one user.
- D. Password management using profiles is always enable

Answer: D

NEW QUESTION 267

Examine this command executed on a client that is remote from the database server. SQL> CONNECT hr/hr@orcl Which two are required for this command to connect the SQLPLUS client to a database instance? (Choose two.)

- A. An orcl TNS entry must be defined in the client-side and server-side tnsnames.ora files
- B. An orcl TNS entry must be defined in the client-side tnsnames.ora file
- C. A service name must be defined to the listener that matches the service name in the orcl TNS entry
- D. An orcl TNS entry must be defined in the server-side tnsnames.ora file
- E. The service name orcl must be defined to the listener

Answer: DE

NEW QUESTION 272

You enabled block change tracking for faster incremental backups in your database. Which background process writes to the change tracking file?

- A. RBAL
- B. CKPT
- C. SMON
- D. PMON
- E. MMON
- F. CTWR
- G. DBWR

Answer: F

NEW QUESTION 276

The schema SALES exists in two databases, ORCL1 and ORCL2, and has the same password, SALES123. User SALES has CREATE DATABASE LINK and

CREATE SESSION privileges on both databases. Examine these commands: Conn SALES/SALES123
CREATE DATABASE LINK orcl2 USING 'orcl2';
What is the outcome of executing these commands in the ORCL1 database?

- A. ORCL2 is created as a public database link to connect a single session to the SALES schema in the ORCL2 database.
- B. ORCL2 is created as a shared database link to connect multiple sessions to the SALES schema in the ORCL2 database.
- C. ORCL2 is created as a private database link to connect to only the SALES schema in the ORCL2 database.
- D. ORCL2 database link creation fail

Answer: C

NEW QUESTION 278

Identify two prerequisites for configuring Enterprise Manager Database Express (EM Express).

- A. Grant the APEX_PUBLIC_USER role to the SYSMAN user.
- B. Use the DBMS_XDB_CONFIG.SETHTTPPORT procedure to configure a port number for Oracle HTTP Server.
- C. Install Oracle HTTP Server.
- D. Configure at least one dispatcher for the TCP/IP protocol.
- E. Create a SYSMAN user with the SYSDBA privilege as an administrator for EM Express

Answer: BD

NEW QUESTION 281

Examine the following steps:

ADBA grants the CREATE TABLE system privilege with ADMIN OPTION to the user SIDNEY. SIDNEY grants the CREATE TABLE system privilege to the HR user.

Which statement is true?

- A. SIDNEY can revoke the CREATE TABLE system privilege only from HR, to whom he granted it.
- B. HR can grant the CREATE TABLE system privilege to other users.
- C. Neither SIDNEY nor HR can create new tables if the DBA revokes the CREATE TABLE privilege from SIDNEY.
- D. HR still retains the CREATE TABLE system privilege if the DBA revokes the CREATE TABLE privilege from SIDNEY.

Answer: D

Explanation:

References:

http://www.dba-oracle.com/t_with_grant_admin_privileges.htm

NEW QUESTION 286

A database uses Automatic Storage Management (ASM) as database storage, which has a diskgroup, DATA1, which is created as follows:

```
SQL> CREATE DISKGROUP data1 NORMAL REDUNDANCY
      FAILGROUP failgrp1 DISK '/dev/sda1', '/dev/sda2'
      FAILGROUP failgrp2 DISK '/dev/sda3', '/dev/sda4';
```

What happens when the FAILGRP1 failure group is corrupted?

- A. Mirroring of allocation units occurs within the FAILGRP2 failure group.
- B. Transactions that are using the diskgroup fail.
- C. ASM does not mirror any data and newly allocated primary allocation units (AU) are stored in the FAILGRP2 failure group.
- D. Data in the FAILGRP1 failure group is moved to the FAILGRP2 failure group and rebalancing is started

Answer: D

NEW QUESTION 287

You create a locally managed tablespace ORDERS_TBS with automatic segment management.

You then create the table DAILY_ORDS_LST in the ORDERS_TBS tablespace using the command. CREATE TABLE daily_ords_1st(ordno NUMBER, ord_date DATE) PCTFREE 20;

How does the PCTFREE storage parameter influence data storage for this table?

- A. It allows only 80% of space to be occupied in all data blocks of this table.
- B. It minimizes row chaining during row insertion.
- C. It minimizes row migration during existing row data updation.
- D. It automatically coalesces free space of a data block when it reaches 20% of available space

Answer: A

NEW QUESTION 289

The HR user owns the BONUSSES table. HR grants privileges to the user TOM by using the command: SQL> GRANT SELECT ON bonuses TO tom WITH GRANT OPTION;

TOM then executes this command to grant privileges to the user JIM: SQL> GRANT SELET ON hr.bonuses TO jim; Which statement is true?

- A. TOM cannot revoke the SELECT ON HR.BONUSSES privilege from JIM.
- B. HR can revoke the SELECT ON HR.BONUSSES privilege from JIM.

- C. JIM can grant the SELECT ON HR.BONUSES privilege to other users, but cannot revoke the privilege from them.
D. HR can revoke the SELECT ON HR.BONUSES privilege from TOM, which will automatically revoke the SELECT ON HR.BONUSES privilege from JIM.

Answer: D

NEW QUESTION 290

You create an Oracle 12c database and then import schemas that are required by an application which has not yet been developed. You want to get advice on creation of or modifications to indexes, materialized views and partitioning in these schemas. What must you run to achieve this?

- A. SQL Access Advisor with a SQL tuning set
B. Automatic Database Diagnostic Monitor (ADDM) report
C. SQL Tuning Advisor
D. SQL Access Advisor with a hypothetical workload
E. SQL Performance Analyzer

Answer: D

NEW QUESTION 294

Which two services may you see on the My Service Dashboard page? (Choose two.)

- A. Network Cloud Service
B. User Cloud Service
C. Compute Cloud Service
D. Database Cloud Service

Answer: CD

NEW QUESTION 295

An application repeatedly accesses small lookup tables, causing a lot of physical I/O operations. What do you recommend to minimize this?

- A. Configure the nonstandard buffer cache with a buffer size greater than the size of the default buffer cache.
B. Increase the size of the shared pool
C. Configure the KEEP buffer cache and alter the tables to use the KEEP cache.
D. Configure the RECYCLE buffer cache and alter the tables to use the RECYCLE cache

Answer: C

NEW QUESTION 296

In your database, archive logging and control file autobackup are enabled.

The data files and redo log files are intact but control files are impacted due to media failure. In which two recovery scenarios must you use the RESETLOGS option? (Choose two.)

- A. One control file copy is intact so the spfile is changed to refer to only one copy.
B. One control file copy is intact and damaged control file copies have to be restored to the default location.
C. All copies of the control file are damaged and the CREATE CONTROLFILE statement is executed manually.
D. All copies of the control file are damaged and the auto backed up control file is used for recovery.
E. One control file copy is intact and damaged control file copies have to be restored to a non-default location

Answer: CD

NEW QUESTION 300

Which three statements are true about naming methods? (Choose three.)

- A. Local naming supports multiple protocols, but for any one connection, the client and server must use the same protocol.
B. In the Easy Connect method, clients can connect to a database server by using the host name of the database with an optional port and service name.
C. In the Easy Connect method, the listener port and IP address must be provided for the connection to be successful.
D. The local naming method does not support connect-time failover and load-balancing options.
E. The directory naming method supports connect-time failover and load-balancing option

Answer: ABE

NEW QUESTION 301

Which three statements are true about windows? (Choose three.)

- A. Only one window can be open at any given time
B. Consumer groups are associated with windows
C. Windows work with job classes to control resource allocation
D. The database service name must be provided during windows creation
E. Windows can automatically start job or change resource allocation among jobs for various time periods

Answer: ACE

NEW QUESTION 306

Automatic Shared Memory Management is enabled for your database instance. You notice that there are SQL statements performing poorly because of repeated parsing activity.

Which action generates recommendations to overcome the performance issues?

- A. running the Memory Advisor for the buffer cache
- B. running the Memory Advisor for the library cache
- C. running the Memory Advisor for the SGA
- D. running the Memory Advisor for the PGA

Answer: B

NEW QUESTION 309

Which files must you copy from the Oracle home of the database that is being upgraded to the new Oracle home for Oracle Database 12c? (Choose three.)

- A. the tnsnames.ora file
- B. the sqlnet.ora file
- C. the initialization parameter file
- D. the password file
- E. the listener.ora file

Answer: ABE

Explanation:

References https://docs.oracle.com/cd/E11882_01/server.112/e23633/afterup.htm#UPGRD52747

NEW QUESTION 314

Which set of statements is true about data dictionary views?

- 1. They are stored in the SYSTEM tablespace.
- 2. They are based on virtual tables.
- 3. They are owned by the SYS user.
- 4. They can be queried by a normal user only if the `07_DICTIONARY_ACCESSIBILITY` parameter is set to TRUE.
- 5. The `V$FIXED_TABLE` view can be queried to list the names of these views.
- 6. They are owned by the SYSTEM user.

- A. 2, 5, and 6
- B. 1, 2, and 3
- C. 1 and 3
- D. 2, 3, 4, and 5

Answer: C

Explanation:

References: https://docs.oracle.com/cd/E11882_01/server.112/e40540/datadict.htm#CNCPT002

NEW QUESTION 318

Which two statements are true about using SQL*Loader? (Choose two.)

- A. It can load data from external files by using the direct path only.
- B. It can load data into multiple tables using the same load statement.
- C. It can load data into only one table at a time.
- D. It can generate unique sequential key values in specified columns.
- E. It can load data from external files by using the conventional path onl

Answer: AC

NEW QUESTION 319

Which three file types are stored in the Fast Recovery Area by default in a traditional nonOMF file system? (Choose three.)

- A. online redo log files
- B. parameter file
- C. multiplexed copies of the current control file
- D. archived log files
- E. Flashback Data Archive files
- F. Flashback logs

Answer: ADF

NEW QUESTION 323

Examine the following command:

SQL> DBMS_STATS.SET_TABLE_PREFS ('SH', 'CUSTOMERS', 'PUBLISH', 'false'); What is the effect of executing this command?

- A. Existing statistics for the CUSTOMERS table become unusable for the query optimizer.
- B. Automatic statistics collection is stopped for the CUSTOMERS table.
- C. Statistics for the CUSTOMERS table are locked and cannot be overwritten.
- D. Statistics subsequently gathered on the CUSTOMERS table are stored as pending statistic

Answer: D

NEW QUESTION 328

Which four operations performed after the Oracle Restart installation are automatically added to the Oracle Restart configuration? (Choose four.)

- A. listener configured by using NETCA
- B. database service created by using SRVCTL
- C. database created by using a SQL statement
- D. database created by using DBCA
- E. ASM instance created by using ASMCA
- F. database service created by using DBMS_SERVICE.CREATE_SERVICE
- G. database service created by modifying the SERVICE_NAMES initialization parameter

Answer: ABDE

Explanation:

References https://docs.oracle.com/cd/E18283_01/server.112/e17120/restart002.htm#insertedID3

NEW QUESTION 331

The HR.DEPARTMENTS table is the parent of the HR.EMPLOYEES table. The EMPLOYEES.DEPARTMENT_ID column has a foreign key constraint with the ON DELETE CASCADE option that refers to the DEPARTMENTS.DEPARTMENT_ID column. An index exists on the DEPARTMENTS.DEPARTMENT_ID column. A transaction deletes a primary key in the DEPARTMENTS table, which has child rows in the EMPLOYEES table. Which statement is true?

- A. The transaction acquires a table lock only on the DEPARTMENTS table until the transaction is complete.
- B. The transaction acquires a table lock on the DEPARTMENTS tabl
- C. This lock enables other sessions to query but not update the DEPARTMENTS table until the transaction on the DEPARTMENTS table is complete.
- D. The transaction acquires a table lock on the EMPLOYEES tabl
- E. This lock enables other sessions to query but not update the EMPLOYEES table until the transaction on the DEPARTMENTS table is complete.
- F. Only the rows that are deleted in the DEPARTMENTS and EMPLOYEES tables are locked until the transactions on the DEPARTMENTS table is complete.

Answer: C

NEW QUESTION 332

You plan to upgrade your Oracle Database 9i to Oracle Database 12c. Which two methods can you use? (Choose two.)

- A. Perform a rolling upgrade.
- B. Perform a direct upgrade by running the Database Upgrade Assistant (DBUA).
- C. Perform a direct upgrade by manually running the catctl.pl and catupgrd.sql scripts before issuing the STARTUPUPGRADE command.
- D. Install the Oracle Database 12c software, create a new Oracle 12c database, and then use the Oracle Data Pump to import data from the source Oracle 9i database to the target Oracle 12c database.
- E. Upgrade your current database to Oracle Database release 10.2.0.5, and then upgrade to Oracle Database 12c.

Answer: AE

NEW QUESTION 333

You want to import the schema objects of the HR user from the development database DEVDB to the production database PRODDB by using Oracle Data Pump. A database link devdb.us.oracle.com is created between PRODDB and DEVDB. You execute the following command on the PRODDB database server:

```
$ impdp system/manager directory = DB_DATA
  dumpfile = schemas.dat
  schemas = hr
  flashback_time = "TO_TIMESTAMP ('05-01-2012 14:35:00', 'DD-MM-
YYYY HH24:MI:SS')"
```

The command fails, displaying the following error:

```
ORA-39001: invalid argument value
ORA-39000: bad dump file specification
ORA-31640: unable to open dump file "/home/oracle/schema/schemas.
dat" for read
ORA-27037: unable to obtain file status
```

What should you do to resolve the error?

- A. Add network_link = devdb.us.oracle.com.
- B. Add the SYSTEM user to the schemas option.
- C. Change the dumpfile option value to schema.dat@devdb.us.oracle.com.
- D. Replace the schemas option with network_1ink = devdb.us.oracle.com.
- E. Replace the dumpfile option with network_1ink = devdb.us.oracle.co

Answer: E

NEW QUESTION 336

Your database is running in ARCHIVELOG mode. You want to take a consistent whole database backup. Which two statements are true in this scenario? (Choose two.)

- A. The user-managed backup consists of only formatted data blocks.

- B. The database must be shut down to take a user-managed backup.
- C. The RMAN backup contains only data files.
- D. The RMAN backup can be performed while the database is open.
- E. The database must be in MOUNT state to take RMAN backup

Answer: AB

NEW QUESTION 341

You configured the Fast Recovery Area (FRA) for your database. The database instance is in ARCHIVELOG mode. The default location for the archived redo log files is the FRA.

Which two files are removed automatically if space is required in the FRA as per the retention policy? (Choose two.)

- A. Archived redo log files that have multiple copies in a different archive location
- B. user-managed backups of data files and control files
- C. RMAN backups that are obsolete
- D. flashback logs

Answer: CD

NEW QUESTION 344

For which three requirements would you use the Database Resource Manager? (Choose three.)

- A. specifying an idle time limit that applies to sessions that are idle and blocking other sessions
- B. limiting the degree of parallelism of operations performed by user sessions in a consumer group
- C. specifying the maximum number of concurrent sessions allowed for a user
- D. limiting the CPU used per database call
- E. specifying the amount of private space a session can allocate in the shared pool of the SGA.

Answer: ABC

Explanation:

References:

http://docs.oracle.com/cd/B19306_01/server.102/b14231/dbrm.htm

NEW QUESTION 347

You want to create a test database as a replica of your production database with minimum intervention from a DBA. Which method would you use?

- A. Use DBCA to create a template from the existing database to contain the database structure and then manually copy the data by using Oracle Data Pump.
- B. Use Database Configuration Assistant (DBCA) to create a template from the existing database to contain the database structure.
- C. Create the database by using the CREATE DATABASE command.
- D. . . . command and manually import data by using Data Pump.
- E. Use DBCA to create a template from the existing database to contain the database structure with data files and then use the same template to create the database in the new location.

Answer: A

NEW QUESTION 349

Which three statements are true about checkpointing? (Choose three.)

- A. It prompts the Checkpoint (CKPT) process to write data to the data files and redo information to the online redo log files.
- B. It ensures that all dirty buffers are written to data files during consistent shutdown.
- C. It reduces the time required for recovery in case of an instance failure.
- D. Frequent thread checkpoints can degrade database performance.
- E. It prompts the Database Writer (DBWn) process to write checkpoint information into data file headers and the control file.

Answer: BCD

NEW QUESTION 351

Which component resides in the System Global Area (SGA) of a database instance only in shared server connections?

- A. User Global Area
- B. Program Global Area
- C. SQL Query Result Cache
- D. PL/SQL Function Result Cache

Answer: A

NEW QUESTION 352

Which two statements are true about Automatic Database Diagnostic Monitor (ADDM)? (Choose two.)

- A. It calls SQL advisors automatically if required.
- B. It provides recommendations only for poorly performing SQL statements.
- C. Its results are stored in AWR.
- D. It runs automatically after each AWR snapshot is created and requires at least two snapshots for analysis.
- E. It requires at least one Automatic Workload Repository (AWR) snapshot for analysis.

Answer:

CE

NEW QUESTION 354

Which users are created and can be used for database and host management of your DBaaS database servers?

- A. opc and oracle users
- B. root, oracle and cloud users
- C. root and oracle users
- D. root, opc and oracle users
- E. cloud and oracle users

Answer: A

NEW QUESTION 358

You want to create a database with a block size other than the default 8 kilobytes (KB) by using the Database Configuration Assistant (DBCA). Which option should you use?

- A. Automatic Storage Management (ASM) for storage of data files
- B. a file system for storage of data files
- C. a Data Warehouse database template
- D. a custom database template

Answer: D

NEW QUESTION 362

Which three statements are true about Oracle Data Pump? (Choose three.)

- A. Oracle Data Pump export and import operations can be performed to move data across different database releases.
- B. DBMS_DATAPUMP PL/SQL packages can be used independent of Data Pump clients.
- C. A directory object must exist and a user performing an EXPDP or IMPDP operation must have read and write permission on that directory object.
- D. Oracle Data Pump export and import operations can be performed only by users with the SYSDBA privilege.
- E. Oracle Data Pump export operations invoked from the clients that are connected remotely by using a connection string, create Data Pump files on the client file system.

Answer: ABC

NEW QUESTION 365

Tape streaming is not happening while performing RMAN tape backup. On investigation, you find that it is not because of the incremental backup or the empty file backup and that RMAN is sending data blocks to tape drive fast enough. What could be a solution to make streaming happen during the backup?

- A. Configure backup optimization
- B. Configure the channel to increase MAXOPENFILES
- C. Configure the channel to increase the capacity with the RATE parameter
- D. Configure the channel to adjust the tape buffer size with the BLKSIZE option

Answer: D

NEW QUESTION 366

Backup requirements for a database:

- * Level 0 backup on Sunday
 - * Cumulative incremental level 1 backup on Monday, Wednesday, and Saturday
 - * Differential incremental level 1 backup on Tuesday, Thursday, and Friday
- Which three statements are true about the strategy? (Choose three.)

- A. Level 0 backup on Sunday contains all the blocks that have been formatted.
- B. Level 0 backup on Sunday contains all the blocks that have been changed since the last level 1 backup.
- C. Level 1 backup on Tuesday, Thursday, and Friday contains all the blocks that have been changed since the last level 1 backup.
- D. Level 1 backup on Monday, Wednesday, and Saturday contains all the blocks that have been changed since the last level 0 backup.
- E. Level 1 backup on Tuesday, Thursday, and Friday contains all the blocks that have been changed since the last level 0 backup.

Answer: ACD

NEW QUESTION 370

Automatic Shared Memory Management (ASMM) is enabled for your database instance. You execute the following command:
SQL> ALTER SYSTEM SET DB_CACHE_SIZE = 100M; Which statement is true?

- A. It succeeds and the minimum size for the DEFAULT buffer pool is set to 100M.
- B. It fails because DB_CACHE_SIZE is a static initialization parameter.
- C. It fails because ASMM is enabled and individual SGA components cannot be sized.
- D. It succeeds and the value is changed in the SPFILE immediately, but the change takes effect only at the next instance startup.

Answer: A

NEW QUESTION 374

When does a database checkpoint occur?

- A. When there is an online redo log switch.

- B. When a user session terminates abnormally.
- C. When a server process terminates abnormally.
- D. When the SHUTDOWN ABORT command is issue

Answer: A

NEW QUESTION 378

You install Oracle Grid Infrastructure standalone server and issue the following command: crsctl start has
Which two existing components get automatically added to the Oracle Restart configuration? (Choose two.)

- A. Oracle CSSD services
- B. the database whose instance is running
- C. Oracle Notification services
- D. Oracle Healthcheck services
- E. Oracle Net Listener

Answer: AC

NEW QUESTION 380

Which three statements are true about user account administration? (Choose three.)

- A. A user's current session is not affected when the user's profile is changed.
- B. Only users with the SYSDBA privilege can change the tablespace quota for other users.
- C. A new user account can be created only by SYS or SYSTEM users.
- D. A user's quota can be set for any permanent tablespace but not for the default temporary tablespace.
- E. A user requires only the CREATE SESSION privilege to change his or her own passwor

Answer: ADE

NEW QUESTION 381

In your Oracle 12c database, you invoke SQL *Loader Express Mode command to load data: \$> sqlldr hr/hr table=employees
Which two statements are true about this command? (Choose two.)

- A. It succeeds and creates the EMPLOYEES table in the HR schema if the table does not exist.
- B. It fails because the SQL *Loader control file location is not specified.
- C. It fails because the SQL *Loader data file location is not specified.
- D. It succeeds with default settings if the EMPLOYEES table belonging to the HR schema is already defined in the database.
- E. It succeeds even if the HR user does not have the CREATE DIRECTORY privileg

Answer: DE

NEW QUESTION 386

SMD is a smallfile locally managed tablespace with manual segment space management. The SH user receives the following error while inserting data into the sales table:

```
ERROR at line 1:  
ORA-01653: unable to extend table SH.SALES by 128 in tablespace SMD.
```

Which three actions can be taken to enable the user to insert data? (Choose three.)

- A. altering the data file associated with the SMD tablespace to grow automatically
- B. adding a data file to the SMD tablespace, provided the tablespace has not reached its maximum number of file
- C. changing segment space management for the SMD tablespace to automatic
- D. resizing the data file associated with the SMD tablespace to make it larger, provided all data files have not yet reached their maximum size
- E. increasing the space quota on the SMD tablespace for the SH user, provided the files have not yet reached their maximum size

Answer: ABD

NEW QUESTION 389

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 1Z0-062 Exam with Our Prep Materials Via below:

<https://www.certleader.com/1Z0-062-dumps.html>