

AWS-Solution-Architect-Associate Dumps

Amazon AWS Certified Solutions Architect - Associate

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>



NEW QUESTION 1

In the context of AWS support, why must an EC2 instance be unreachable for 20 minutes rather than allowing customers to open tickets immediately?

- A. Because most reachability issues are resolved by automated processes in less than 20 minutes
- B. Because all EC2 instances are unreachable for 20 minutes every day when AWS does routine maintenance
- C. Because all EC2 instances are unreachable for 20 minutes when first launched
- D. Because of all the reasons listed here

Answer: A

Explanation:

An EC2 instance must be unreachable for 20 minutes before opening a ticket, because most reachability issues are resolved by automated processes in less than 20 minutes and will not require any action on the part of the customer. If the instance is still unreachable after this time frame has passed, then you should open a case with support.

Reference: <https://aws.amazon.com/premiumsupport/faqs/>

NEW QUESTION 2

After you recommend Amazon Redshift to a client as an alternative solution to paying data warehouses to analyze his data, your client asks you to explain why you are recommending Redshift. Which of the following would be a reasonable response to his request?

- A. It has high performance at scale as data and query complexity grows.
- B. It prevents reporting and analytic processing from interfering with the performance of OLTP workloads.
- C. You don't have the administrative burden of running your own data warehouse and dealing with setup, durability, monitoring, scaling, and patching.
- D. All answers listed are a reasonable response to his QUESTION

Answer: D

Explanation:

Amazon Redshift delivers fast query performance by using columnar storage technology to improve I/O efficiency and parallelizing queries across multiple nodes. Redshift uses standard PostgreSQL JDBC and ODBC drivers, allowing you to use a wide range of familiar SQL clients. Data load speed scales linearly with cluster size, with integrations to Amazon S3, Amazon DynamoDB, Amazon Elastic MapReduce, Amazon Kinesis or any SSH-enabled host.

AWS recommends Amazon Redshift for customers who have a combination of needs, such as: High performance at scale as data and query complexity grows
Desire to prevent reporting and analytic processing from interfering with the performance of OLTP workloads

Large volumes of structured data to persist and query using standard SQL and existing BI tools
Desire to the administrative burden of running one's own data warehouse and dealing with setup, durability, monitoring, scaling and patching

Reference: https://aws.amazon.com/running_databases/#redshift_anchor

NEW QUESTION 3

One of the criteria for a new deployment is that the customer wants to use AWS Storage Gateway. However you are not sure whether you should use gateway-cached volumes or gateway-stored volumes or even what the differences are. Which statement below best describes those differences?

- A. Gateway-cached lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- B. Gateway-stored enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.
- C. Gateway-cached is free whilst gateway-stored is not.
- D. Gateway-cached is up to 10 times faster than gateway-stored.
- E. Gateway-stored lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- F. Gateway-cached enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.

Answer: A

Explanation:

Volume gateways provide cloud-backed storage volumes that you can mount as Internet Small Computer System Interface (iSCSI) devices from your on-premises application servers. The gateway supports the following volume configurations:

Gateway-cached volumes — You store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally.

Gateway-cached volumes offer a substantial cost savings on primary storage and minimize the need to scale your storage on-premises. You also retain low-latency access to your frequently accessed data.

Gateway-stored volumes — If you need low-latency access to your entire data set, you can configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3. This configuration provides durable and inexpensive off-site backups that you can recover to your local data center or Amazon EC2. For example, if you need replacement capacity for disaster recovery, you can recover the backups to Amazon EC2.

Reference: <http://docs.aws.amazon.com/storagegateway/latest/userguide/volume-gateway.html>

NEW QUESTION 4

After setting up a Virtual Private Cloud (VPC) network, a more experienced cloud engineer suggests that to achieve low network latency and high network throughput you should look into setting up a placement group. You know nothing about this, but begin to do some research about it and are especially curious about its limitations. Which of the below statements is wrong in describing the limitations of a placement group?

- A. Although launching multiple instance types into a placement group is possible, this reduces the likelihood that the required capacity will be available for your launch to succeed.
- B. A placement group can span multiple Availability Zones.
- C. You can't move an existing instance into a placement group.
- D. A placement group can span peered VPCs

Answer: B

Explanation:

A placement group is a logical grouping of instances within a single Availability Zone. Using placement groups enables applications to participate in a low-latency, 10 Gbps network. Placement groups are recommended for applications that benefit from low network latency, high network throughput, or both. To provide the lowest latency, and the highest packet-per-second network performance for your placement group, choose an instance type that supports enhanced networking. Placement groups have the following limitations:

The name you specify for a placement group a name must be unique within your AWS account. A placement group can't span multiple Availability Zones.

Although launching multiple instance types into a placement group is possible, this reduces the likelihood that the required capacity will be available for your launch to succeed. We recommend using the same instance type for all instances in a placement group.

You can't merge placement groups. Instead, you must terminate the instances in one placement group, and then relaunch those instances into the other placement group.

A placement group can span peered VPCs; however, you will not get full-bisection bandwidth between instances in peered VPCs. For more information about VPC peering connections, see VPC Peering in the Amazon VPC User Guide.

You can't move an existing instance into a placement group. You can create an AM from your existing instance, and then launch a new instance from the AMI into a placement group.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 5

A client needs you to import some existing infrastructure from a dedicated hosting provider to AWS to try and save on the cost of running his current website. He also needs an automated process that manages backups, software patching, automatic failure detection, and recovery. You are aware that his existing set up currently uses an Oracle database. Which of the following AWS databases would be best for accomplishing this task?

- A. Amazon RDS
- B. Amazon Redshift
- C. Amazon SimpleDB
- D. Amazon ElastiCache

Answer: A

Explanation:

Amazon RDS gives you access to the capabilities of a familiar MySQL, Oracle, SQL Server, or PostgreSQL database engine. This means that the code, applications, and tools you already use today with your existing databases can be used with Amazon RDS. Amazon RDS automatically patches the database software and backs up your database, storing the backups for a user-defined retention period and enabling point-in-time recovery.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 6

You need to import several hundred megabytes of data from a local Oracle database to an Amazon RDS DB instance. What does AWS recommend you use to accomplish this?

- A. Oracle export/import utilities
- B. Oracle SQL Developer
- C. Oracle Data Pump
- D. DBMS_FILE_TRANSFER

Answer: C

Explanation:

How you import data into an Amazon RDS DB instance depends on the amount of data you have and the number and variety of database objects in your database.

For example, you can use Oracle SQL Developer to import a simple, 20 MB database; you want to use Oracle Data Pump to import complex databases or databases that are several hundred megabytes or several terabytes in size.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Oracle.Procedural.Importing.html>

NEW QUESTION 7

A user has created an EBS volume with 1000 IOPS. What is the average IOPS that the user will get for most of the year as per EC2 SLA if the instance is attached to the EBS optimized instance?

- A. 950
- B. 990
- C. 1000
- D. 900

Answer: D

Explanation:

As per AWS SLA if the instance is attached to an EBS-Optimized instance, then the Provisioned IOPS volumes are designed to deliver within 10% of the provisioned IOPS performance 99.9% of the time in a given year. Thus, if the user has created a volume of 1000 IOPS, the user will get a minimum 900 IOPS 99.9% time of the year.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 8

You need to migrate a large amount of data into the cloud that you have stored on a hard disk and you decide that the best way to accomplish this is with AWS Import/Export and you mail the hard disk to AWS. Which of the following statements is incorrect in regards to AWS Import/Export?

- A. It can export from Amazon S3
- B. It can Import to Amazon Glacier
- C. It can export from Amazon Glacier.
- D. It can Import to Amazon EBS

Answer: C

Explanation:

AWS Import/Export supports: Import to Amazon S3

Export from Amazon S3 Import to Amazon EBS Import to Amazon Glacier

AWS Import/Export does not currently support export from Amazon EBS or Amazon Glacier. Reference:

<https://docs.aws.amazon.com/AWSImportExport/latest/DG/whatisdisk.html>

NEW QUESTION 9

A user wants to use an EBS-backed Amazon EC2 instance for a temporary job. Based on the input data, the job is most likely to finish within a week. Which of the following steps should be followed to terminate the instance automatically once the job is finished?

- A. Configure the EC2 instance with a stop instance to terminate it.
- B. Configure the EC2 instance with ELB to terminate the instance when it remains idle.
- C. Configure the CloudWatch alarm on the instance that should perform the termination action once the instance is idle.
- D. Configure the Auto Scaling schedule actMty that terminates the instance after 7 day

Answer: C

Explanation:

Auto Scaling can start and stop the instance at a pre-defined time. Here, the total running time is unknown. Thus, the user has to use the CloudWatch alarm, which monitors the CPU utilization. The user can create an alarm that is triggered when the average CPU utilization percentage has been lower than 10 percent for 24 hours, signaling that it is idle and no longer in use. When the utilization is below the threshold limit, it will terminate the instance as a part of the instance action.

Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingAlarmActions.html>

NEW QUESTION 10

In Amazon EC2, partial instance-hours are billed .

- A. per second used in the hour
- B. per minute used
- C. by combining partial segments into full hours
- D. as full hours

Answer: D

Explanation:

Partial instance-hours are billed to the next hour. Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 10

In EC2, what happens to the data in an instance store if an instance reboots (either intentionally or unintentionally)?

- A. Data is deleted from the instance store for security reasons.
- B. Data persists in the instance store.
- C. Data is partially present in the instance store.
- D. Data in the instance store will be los

Answer: B

Explanation:

The data in an instance store persists only during the lifetime of its associated instance. If an instance reboots (intentionally or unintentionally), data in the instance store persists. However, data on instance store volumes is lost under the following circumstances.

Failure of an underlying drive

Stopping an Amazon EBS-backed instance Terminating an instance

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/InstanceStorage.html>

NEW QUESTION 15

You are setting up a VPC and you need to set up a public subnet within that VPC. Which following requirement must be met for this subnet to be considered a public subnet?

- A. Subnet's traffic is not routed to an internet gateway but has its traffic routed to a virtual private gateway.
- B. Subnet's traffic is routed to an internet gateway.
- C. Subnet's traffic is not routed to an internet gateway.
- D. None of these answers can be considered a public subne

Answer: B

Explanation:

A virtual private cloud (VPC) is a virtual network dedicated to your AWS account. It is logically isolated from other virtual networks in the AWS cloud. You can launch your AWS resources, such as Amazon EC2 instances, into your VPC. You can configure your VPC: you can select its IP address range, create subnets, and configure route tables, network gateways, and security settings.

A subnet is a range of IP addresses in your VPC. You can launch AWS resources into a subnet that you select. Use a public subnet for resources that must be connected to the internet, and a private subnet for resources that won't be connected to the Internet.

If a subnet's traffic is routed to an internet gateway, the subnet is known as a public subnet.

If a subnet doesn't have a route to the internet gateway, the subnet is known as a private subnet.

If a subnet doesn't have a route to the internet gateway, but has its traffic routed to a virtual private gateway, the subnet is known as a VPN-only subnet.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Subnets.html

NEW QUESTION 19

Can you specify the security group that you created for a VPC when you launch an instance in EC2-Classic?

- A. No, you can specify the security group created for EC2-Classic when you launch a VPC instance.
- B. No
- C. Yes
- D. No, you can specify the security group created for EC2-Classic to a non-VPC based instance onl

Answer: B

Explanation:

If you're using EC2-Classic, you must use security groups created specifically for EC2-Classic. When you launch an instance in EC2-Classic, you must specify a security group in the same region as the instance. You can't specify a security group that you created for a VPC when you launch an instance in EC2-Classic.

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-network-security.html#ec2-classic-security-groups>

NEW QUESTION 22

You are checking the workload on some of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes and it seems that the I/O latency is higher than you require. You should probably check the to make sure that your application is not trying to drive more IOPS than you have provisioned.

- A. Amount of IOPS that are available
- B. Acknowledgement from the storage subsystem
- C. Average queue length
- D. Time it takes for the I/O operation to complete

Answer: C

Explanation:

In EBS workload demand plays an important role in getting the most out of your General Purpose (SSD) and Provisioned IOPS (SSD) volumes. In order for your volumes to deliver the amount of IOPS that are available, they need to have enough I/O requests sent to them. There is a relationship between the demand on the volumes, the amount of IOPS that are available to them, and the latency of the request (the amount of time it takes for the I/O operation to complete).

Latency is the true end-to-end client time of an I/O operation; in other words, when the client sends a IO, how long does it take to get an acknowledgement from the storage subsystem that the IO read or write is complete.

If your I/O latency is higher than you require, check your average queue length to make sure that your application is not trying to drive more IOPS than you have provisioned. You can maintain high IOPS while keeping latency down by maintaining a low average queue length (which is achieved by provisioning more IOPS for your volume).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-workload-demand.html>

NEW QUESTION 24

In Amazon EC2 Container Service, are other container types supported?

- A. Yes, EC2 Container Service supports any container service you need.
- B. Yes, EC2 Container Service also supports Microsoft container service.
- C. No, Docker is the only container platform supported by EC2 Container Service presently.
- D. Yes, EC2 Container Service supports Microsoft container service and Openstac

Answer: C

Explanation:

In Amazon EC2 Container Service, Docker is the only container platform supported by EC2 Container Service presently.

Reference: <http://aws.amazon.com/ecs/faqs/>

NEW QUESTION 25

As AWS grows, most of your clients' main concerns seem to be about security, especially when all of their competitors also seem to be using AWS. One of your clients asks you whether having a competitor who hosts their EC2 instances on the same physical host would make it easier for the competitor to hack into the client's data. Which of the following statements would be the best choice to put your client's mind at rest?

- A. Different instances running on the same physical machine are isolated from each other via a 256-bit Advanced Encryption Standard (AES-256).
- B. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor and via a 256-bit Advanced Encryption Standard (AES-256).
- C. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.
- D. Different instances running on the same physical machine are isolated from each other via IAM permissions.

Answer: C

Explanation:

Amazon Elastic Compute Cloud (EC2) is a key component in Amazon's Infrastructure as a Service (IaaS), providing resizable computing capacity using server instances in AWS's data centers. Amazon EC2 is designed to make web-scale computing easier by enabling you to obtain and configure capacity with minimal friction.

You create and launch instances, which are collections of platform hardware and software. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.

Amazon is active in the Xen community, which provides awareness of the latest developments. In addition, the AWS firewall resides within the hypervisor layer, between the physical network interface and the instance's virtual interface. All packets must pass through this layer, thus an instance's neighbors have no more access to that instance than any other host on the Internet and can be treated as if they are on separate physical hosts. The physical RAM is separated using similar mechanisms.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 26

In Amazon RDS, security groups are ideally used to:

- A. Define maintenance period for database engines
- B. Launch Amazon RDS instances in a subnet
- C. Create, describe, modify, and delete DB instances
- D. Control what IP addresses or EC2 instances can connect to your databases on a DB instance

Answer: D

Explanation:

In Amazon RDS, security groups are used to control what IP addresses or EC2 instances can connect to your databases on a DB instance. When you first create a DB instance, its firewall prevents any database access except through rules specified by an associated security group. Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/UsingWithRDS.html>

NEW QUESTION 30

You need to set up a complex network infrastructure for your organization that will be reasonably easy to deploy, replicate, control, and track changes on. Which AWS service would be best to use to help you accomplish this?

- A. AWS Import/Export
- B. AWS CloudFormation
- C. Amazon Route 53
- D. Amazon CloudWatch

Answer: B

Explanation:

AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. You don't need to individually create and configure AWS resources and figure out what's dependent on what. AWS CloudFormation handles all of that. Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/Welcome.html>

NEW QUESTION 35

Can resource record sets in a hosted zone have a different domain suffix (for example, `www.blog.acme.com` and `www.acme.ca`)?

- A. Yes, it can have for a maximum of three different TLDs.
- B. Yes
- C. Yes, it can have depending on the TLD.
- D. No

Answer: D

Explanation:

The resource record sets contained in a hosted zone must share the same suffix. For example, the `example.com` hosted zone can contain resource record sets for `www.example.com` and `www.aws.example.com` subdomains, but it cannot contain resource record sets for a `www.example.ca` subdomain. Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/AboutHostedZones.html>

NEW QUESTION 38

Which of the following AWS CLI commands is syntactically incorrect?

1. `$ aws ec2 describe-instances`
2. `$ aws ec2 start-instances --instance-ids i-1348636c`
3. `$ aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"`
4. `$ aws sqs receive-message --queue-url https://queue.amazonaws.com/546419318123/Test`

- A. 3
- B. 4
- C. 2
- D. 1

Answer: A

Explanation:

The following CLI command is missing a hyphen before `-message`.
`aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"`
It has been added below in red
`aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError ---message "Script Failure"`
Reference: <http://aws.amazon.com/cli/>

NEW QUESTION 41

Your company has been storing a lot of data in Amazon Glacier and has asked for an inventory of what is in there exactly. So you have decided that you need to download a vault inventory. Which of the following statements is incorrect in relation to Vault Operations in Amazon Glacier?

- A. You can use Amazon Simple Notification Service (Amazon SNS) notifications to notify you when the job completes.
- B. A vault inventory refers to the list of archives in a vault.
- C. You can use Amazon Simple Queue Service (Amazon SQS) notifications to notify you when the job completes.
- D. Downloading a vault inventory is an asynchronous operation

Answer: C

Explanation:

Amazon Glacier supports various vault operations.

A vault inventory refers to the list of archives in a vault. For each archive in the list, the inventory provides archive information such as archive ID, creation date, and size. Amazon Glacier updates the vault inventory approximately once a day, starting on the day the first archive is uploaded to the vault. A vault inventory must exist for you to be able to download it.

Downloading a vault inventory is an asynchronous operation. You must first initiate a job to download the inventory. After receiving the job request, Amazon Glacier prepares your inventory for download. After the job completes, you can download the inventory data.

Given the asynchronous nature of the job, you can use Amazon Simple Notification Service (Amazon SNS) notifications to notify you when the job completes. You can specify an Amazon SNS topic for each individual job request or configure your vault to send a notification when specific vault events occur. Amazon Glacier prepares an inventory for each vault periodically, every 24 hours. If there have been no archive additions or deletions to the vault since the last inventory, the inventory date is not updated. When you initiate a job for a vault inventory, Amazon Glacier returns the last inventory it generated, which is a point-in-time snapshot and not real-time data. You might not find it useful to retrieve vault inventory for each archive upload. However, suppose you maintain a database on the client-side associating metadata about the archives you upload to Amazon Glacier. Then, you might find the vault inventory useful to reconcile information in your database with the actual vault inventory.

Reference: <http://docs.aws.amazon.com/amazonglacier/latest/dev/working-with-vaults.html>

NEW QUESTION 46

Having set up a website to automatically be redirected to a backup website if it fails, you realize that there are different types of failovers that are possible. You need all your resources to be available the majority of the time. Using Amazon Route 53 which configuration would best suit this requirement?

- A. Active-active failover.
- B. Non
- C. Route 53 can't failover.
- D. Active-passive failover.
- E. Active-active-passive and other mixed configuration

Answer: A

Explanation:

You can set up a variety of failover configurations using Amazon Route 53 alias: weighted, latency, geolocation routing, and failover resource record sets.

Active-active failover: Use this failover configuration when you want all of your resources to be available the majority of the time. When a resource becomes unavailable, Amazon Route 53 can detect that it's unhealthy and stop including it when responding to queries.

Active-passive failover: Use this failover configuration when you want a primary group of resources to be available the majority of the time and you want a secondary group of resources to be on standby in case all of the primary resources become unavailable. When responding to queries, Amazon Route 53 includes only the healthy primary resources. If all of the primary resources are unhealthy, Amazon Route 53 begins to include only the healthy secondary resources in response to DNS queries.

Active-active-passive and other mixed configurations: You can combine alias and non-alias resource record sets to produce a variety of Amazon Route 53 behaviors.

Reference: <http://docs.aws.amazon.com/Route53/latest/DeveloperGuide/dns-failover.html>

NEW QUESTION 47

You have been storing massive amounts of data on Amazon Glacier for the past 2 years and now start to wonder if there are any limitations on this. What is the correct answer to your QUESTION ?

- A. The total volume of data is limited but the number of archives you can store are unlimited.
- B. The total volume of data is unlimited but the number of archives you can store are limited.
- C. The total volume of data and number of archives you can store are unlimited.
- D. The total volume of data is limited and the number of archives you can store are limited

Answer: C

Explanation:

An archive is a durably stored block of information. You store your data in Amazon Glacier as archives. You may upload a single file as an archive, but your costs will be lower if you aggregate your data. TAR and ZIP are common formats that customers use to aggregate multiple files into a single file before uploading to Amazon Glacier.

The total volume of data and number of archives you can store are unlimited. Individual Amazon Glacier archives can range in size from 1 byte to 40 terabytes.

The largest archive that can be uploaded in a single upload request is 4 gigabytes.

For items larger than 100 megabytes, customers should consider using the Multipart upload capability. Archives stored in Amazon Glacier are immutable, i.e. archives can be uploaded and deleted but cannot be edited or overwritten.

Reference: <https://aws.amazon.com/glacier/faqs/>

NEW QUESTION 49

Does AWS CloudFormation support Amazon EC2 tagging?

- A. Yes, AWS CloudFormation supports Amazon EC2 tagging
- B. No, CloudFormation doesn't support any tagging
- C. No, it doesn't support Amazon EC2 tagging.
- D. It depends if the Amazon EC2 tagging has been defined in the template

Answer: A

Explanation:

In AWS CloudFormation, Amazon EC2 resources that support the tagging feature can also be tagged in an AWS template. The tag values can refer to template parameters, other resource names, resource attribute values (e.g. addresses), or values computed by simple functions (e.g., a concatenated list of strings).

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 54

After setting up several database instances in Amazon Relational Database Service (Amazon RDS) you decide that you need to track the performance and health of your databases. How can you do this?

- A. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.
- B. Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance.
- C. All of the items listed will track the performance and health of a database.
- D. View, download, or watch database log files using the Amazon RDS console or Amazon RDS API
- E. You can also query some database log files that are loaded into database tables.

Answer: C

Explanation:

Amazon Relational Database Service (Amazon RDS) is a web service that makes it easier to set up, operate, and scale a relational database in the cloud. It provides cost-efficient, resizable capacity for an industry-standard relational database and manages common database administration tasks.

There are several ways you can track the performance and health of a database or a DB instance. You can:

Use the free Amazon CloudWatch service to monitor the performance and health of a DB instance. Subscribe to Amazon RDS events to be notified when changes occur with a DB instance, DB snapshot, DB parameter group, or DB security group.

View, download, or watch database log files using the Amazon RDS console or Amazon RDS APIs. You can also query some database log files that are loaded into database tables.

Use the AWS CloudTrail service to record AWS calls made by your AWS account. The calls are recorded in log files and stored in an Amazon S3 bucket.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Monitoring.html

NEW QUESTION 59

A user has created a subnet in VPC and launched an EC2 instance within it. The user has not selected the option to assign the IP address while launching the instance. The user has 3 elastic IPs and is trying to assign one of the Elastic IPs to the VPC instance from the console. The console does not show any instance in the IP assignment screen. What is a possible reason that the instance is unavailable in the assigned IP console?

- A. The IP address may be attached to one of the instances
- B. The IP address belongs to a different zone than the subnet zone
- C. The user has not created an internet gateway
- D. The IP addresses belong to EC2 Classic; so they cannot be assigned to VPC

Answer: D

Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. A user can create a subnet with VPC and launch instances inside that subnet. When the user is launching an instance he needs to select an option which attaches a public IP to the instance. If the user has not selected the option to attach the public IP then it will only have a private IP when launched. If the user wants to connect to an instance from the internet he should create an elastic IP with VPC. If the elastic IP is a part of EC2 Classic it cannot be assigned to a VPC instance.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/GettingStartedGuide/LaunchInstance.html>

NEW QUESTION 61

Select a true statement about Amazon EC2 Security Groups (EC2-Classic).

- A. After you launch an instance in EC2-Classic, you can't change its security groups.
- B. After you launch an instance in EC2-Classic, you can change its security groups only once.
- C. After you launch an instance in EC2-Classic, you can only add rules to a security group.
- D. After you launch an instance in EC2-Classic, you cannot add or remove rules from a security group

Answer: A

Explanation:

After you launch an instance in EC2-Classic, you can't change its security groups. However, you can add rules to or remove rules from a security group, and those changes are automatically applied to all instances that are associated with the security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 65

A user has created photo editing software and hosted it on EC2. The software accepts requests from the user about the photo format and resolution and sends a message to S3 to enhance the picture accordingly. Which of the below mentioned AWS services will help make a scalable software with the AWS infrastructure in this scenario?

- A. AWS Simple Notification Service
- B. AWS Simple Queue Service
- C. AWS Elastic Transcoder
- D. AWS Glacier

Answer: B

Explanation:

Amazon Simple Queue Service (SQS) is a fast, reliable, scalable, and fully managed message queuing service. SQS provides a simple and cost-effective way to decouple the components of an application. The user can configure SQS, which will decouple the call between the EC2 application and S3. Thus, the application does not keep waiting for S3 to provide the data.

Reference: <http://aws.amazon.com/sqs/faqs/>

NEW QUESTION 67

Which of the following strategies can be used to control access to your Amazon EC2 instances?

- A. DB security groups
- B. IAM policies
- C. None of these
- D. EC2 security groups

Answer: D

Explanation:

IAM policies allow you to specify what actions your IAM users are allowed to perform against your EC2 Instances. However, when it comes to access control, security groups are what you need in order to define and control the way you want your instances to be accessed, and whether or not certain kind of communications are allowed or not.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 70

A user has launched one EC2 instance in the US East region and one in the US West region. The user has launched an RDS instance in the US East region. How can the user configure access from both the EC2 instances to RDS?

- A. It is not possible to access RDS of the US East region from the US West region
- B. Configure the US West region's security group to allow a request from the US East region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- C. Configure the security group of the US East region to allow traffic from the US West region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- D. Configure the security group of both instances in the ingress rule of the RDS security group

Answer: C

Explanation:

The user cannot authorize an Amazon EC2 security group if it is in a different AWS Region than the RDS

DB instance. The user can authorize an IP range or specify an Amazon EC2 security group in the same region that refers to an IP address in another region. In this case allow IP of US West inside US East's security group and open the RDS security group for US East region.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 71

A client of yours has a huge amount of data stored on Amazon S3, but is concerned about someone stealing it while it is in transit. You know that all data is encrypted in transit on AWS, but which of the following is wrong when describing server-side encryption on AWS?

- A. Amazon S3 server-side encryption employs strong multi-factor encryption.
- B. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data.
- C. In server-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools.
- D. Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks.

Answer: C

Explanation:

Amazon S3 encrypts your object before saving it on disks in its data centers and decrypts it when you download the objects. You have two options depending on how you choose to manage the encryption keys: Server-side encryption and client-side encryption.

Server-side encryption is about data encryption at rest—that is, Amazon S3 encrypts your data as it writes it to disks in its data centers and decrypts it for you when you access it. As long as you authenticate your request and you have access permissions, there is no difference in the way you access encrypted or unencrypted objects. Amazon S3 manages encryption and decryption for you. For example, if you share your objects using a pre-signed URL, that URL works the same way for both encrypted and unencrypted objects.

In client-side encryption, you manage encryption/decryption of your data, the encryption keys, and related tools. Server-side encryption is an alternative to client-side encryption in which Amazon S3 manages the encryption of your data, freeing you from the tasks of managing encryption and encryption keys.

Amazon S3 server-side encryption employs strong multi-factor encryption. Amazon S3 encrypts each object with a unique key. As an additional safeguard, it encrypts the key itself with a master key that it regularly rotates. Amazon S3 server-side encryption uses one of the strongest block ciphers available, 256-bit Advanced Encryption Standard (AES-256), to encrypt your data.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingServerSideEncryption.html>

NEW QUESTION 73

You have just set up a large site for a client which involved a huge database which you set up with Amazon RDS to run as a Multi-AZ deployment. You now start to worry about what will happen if the database instance fails. Which statement best describes how this database will function if there is a database failure?

- A. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- B. Your database will not resume operation without manual administrative intervention.
- C. Updates to your DB Instance are asynchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.
- D. Updates to your DB Instance are synchronously replicated across S3 to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

Answer: A

Explanation:

Amazon Relational Database Service (Amazon RDS) is a managed service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity, while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

When you create or modify your DB Instance to run as a Multi-AZ deployment, Amazon RDS automatically provisions and maintains a synchronous "standby" replica in a different Availability Zone. Updates to your DB Instance are synchronously replicated across Availability Zones to the standby in order to keep both in sync and protect your latest database updates against DB Instance failure.

During certain types of planned maintenance, or in the unlikely event of DB Instance failure or Availability Zone failure, Amazon RDS will automatically failover to the standby so that you can resume database writes and reads as soon as the standby is promoted. Since the name record for your DB Instance remains the same, your application can resume database operation without the need for manual administrative intervention. With Multi-AZ deployments, replication is transparent: you do not interact directly with the standby, and it cannot be used to serve read traffic. If you are using Amazon RDS for MySQL and are looking to scale read traffic beyond the capacity constraints of a single DB Instance, you can deploy one or more Read Replicas.

Reference: <http://aws.amazon.com/rds/faqs/>

NEW QUESTION 77

Which IAM role do you use to grant AWS Lambda permission to access a DynamoDB Stream?

- A. Dynamic role
- B. Invocation role
- C. Execution role
- D. Event Source role

Answer: C

Explanation:

You grant AWS Lambda permission to access a DynamoDB Stream using an IAM role known as the "execution role".

Reference: <http://docs.aws.amazon.com/lambda/latest/dg/intro-permission-model.html>

NEW QUESTION 81

Name the disk storage supported by Amazon Elastic Compute Cloud (EC2).

- A. None of these
- B. Amazon AppStream store
- C. Amazon SNS store
- D. Amazon Instance Store

Answer: D

Explanation:

Amazon EC2 supports the following storage options: Amazon Elastic Block Store (Amazon EBS) Amazon EC2 Instance Store Amazon Simple Storage Service (Amazon S3)

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 85

You are signed in as root user on your account but there is an Amazon S3 bucket under your account that you cannot access. What is a possible reason for this?

- A. An IAM user assigned a bucket policy to an Amazon S3 bucket and didn't specify the root user as a principal
- B. The S3 bucket is full.
- C. The S3 bucket has reached the maximum number of objects allowed.
- D. You are in the wrong availability zone

Answer: A

Explanation:

With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In some cases, you might have an IAM user with full access to IAM and Amazon S3. If the IAM user assigns a bucket policy to an Amazon S3 bucket and doesn't specify the root user as a principal, the root user is denied access to that bucket. However, as the root user, you can still access the bucket by modifying the bucket policy to allow root user access.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#testing2>

NEW QUESTION 90

You have multiple VPN connections and want to provide secure communication between sites using the AWS VPN CloudHub. Which statement is the most accurate in describing what you must do to set this up correctly?

- A. Create a virtual private gateway with multiple customer gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs)
- B. Create a virtual private gateway with multiple customer gateways, each with a unique set of keys
- C. Create a virtual public gateway with multiple customer gateways, each with a unique Private subnet
- D. Create a virtual private gateway with multiple customer gateways, each with unique subnet id

Answer: A

Explanation:

If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who'd like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

To use the AWS VPN CloudHub, you must create a virtual private gateway with multiple customer gateways, each with unique Border Gateway Protocol (BGP) Autonomous System Numbers (ASNs). Customer gateways advertise the appropriate routes (BGP prefixes) over their VPN connections. These routing advertisements are received and re-advertised to each BGP peer, enabling each site to send data to and receive data from the other sites. The routes for each spoke must have unique ASNs and the sites must not have overlapping IP ranges. Each site can also send and receive data from the VPC as if they were using a standard VPN connection.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html

NEW QUESTION 91

A user has deployed an application on his private cloud. The user is using his own monitoring tool. He wants to configure it so that whenever there is an error, the monitoring tool will notify him via SMS. Which of the below mentioned AWS services will help in this scenario?

- A. AWS SES
- B. AWS SNS
- C. None because the user infrastructure is in the private cloud.
- D. AWS SMS

Answer: B

Explanation:

Amazon Simple Notification Service (Amazon SNS) is a fast, flexible, and fully managed push messaging service. Amazon SNS can be used to make push notifications to mobile devices. Amazon SNS can deliver notifications by SMS text message or email to the Amazon Simple Queue Service (SQS) queues or to any HTTP endpoint. In this case user can use the SNS APIs to send SMS.

Reference: <http://aws.amazon.com/sns/>

NEW QUESTION 96

After setting up an EC2 security group with a cluster of 20 EC2 instances, you find an error in the security group settings. You quickly make changes to the security group settings. When will the changes to the settings be effective?

- A. The settings will be effective immediately for all the instances in the security group.
- B. The settings will be effective only when all the instances are restarted.
- C. The settings will be effective for all the instances only after 30 minutes.
- D. The settings will be effective only for the new instances added to the security group.

Answer: A

Explanation:

Amazon Redshift applies changes to a cluster security group immediately. So if you have associated the cluster security group with a cluster, inbound cluster access rules in the updated cluster security group apply immediately.

Reference: <http://docs.aws.amazon.com/redshift/latest/mgmt/working-with-security-groups.html>

NEW QUESTION 97

You have a lot of data stored in the AWS Storage Gateway and your manager has come to you asking about how the billing is calculated, specifically the Virtual Tape Shelf usage. What would be a correct response to this?

- A. You are billed for the virtual tape data you store in Amazon Glacier and are billed for the size of the virtual tape.
- B. You are billed for the virtual tape data you store in Amazon Glacier and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- C. You are billed for the virtual tape data you store in Amazon S3 and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- D. You are billed for the virtual tape data you store in Amazon S3 and are billed for the size of the virtual tape.

Answer: B

Explanation:

The AWS Storage Gateway is a service connecting an on-premises software appliance with cloud-based storage to provide seamless and secure integration between an organization's on-premises IT environment and AWS's storage infrastructure.

AWS Storage Gateway billing is as follows. Volume storage usage (per GB per month):

You are billed for the Cached volume data you store in Amazon S3. You are only billed for volume capacity you use, not for the size of the volume you create.

Snapshot Storage usage (per GB per month): You are billed for the snapshots your gateway stores in Amazon S3. These snapshots are stored and billed as Amazon EBS snapshots. Snapshots are incremental backups, reducing your storage charges. When taking a new snapshot, only the data that has changed since your last snapshot is stored.

Virtual Tape Library usage (per GB per month):

You are billed for the virtual tape data you store in Amazon S3. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Virtual Tape Shelf usage (per GB per month):

You are billed for the virtual tape data you store in Amazon Glacier. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Reference: <https://aws.amazon.com/storagegateway/faqs/>

NEW QUESTION 101

A user is currently building a website which will require a large number of instances in six months, when a demonstration of the new site will be given upon launch. Which of the below mentioned options allows the user to procure the resources beforehand so that they need not worry about infrastructure availability during the demonstration?

- A. Procure all the instances as reserved instances beforehand.
- B. Launch all the instances as part of the cluster group to ensure resource availability.
- C. Pre-warm all the instances one month prior to ensure resource availability.
- D. Ask AWS now to procure the dedicated instances in 6 months.

Answer: A

Explanation:

Amazon Web Services has massive hardware resources at its data centers, but they are finite. The best way for users to maximize their access to these resources is by reserving a portion of the computing capacity that they require. This can be done through reserved instances. With reserved instances, the user literally reserves the computing capacity in the Amazon Web Services cloud.

Reference: http://media.amazonwebservices.com/AWS_Building_Fault_Tolerant_Applications.pdf

NEW QUESTION 105

You receive the following request from a client to quickly deploy a static website for them, specifically on AWS. The requirements are low-cost, reliable, online storage, and a reliable and cost-effective way to route customers to the website, as well as a way to deliver content with low latency and high data transfer speeds so that visitors to his website don't experience unnecessary delays. What do you think would be the minimum AWS services that could fulfill the client's request?

- A. Amazon Route 53, Amazon CloudFront and Amazon VPC.
- B. Amazon S3, Amazon Route 53 and Amazon RDS
- C. Amazon S3, Amazon Route 53 and Amazon CloudFront
- D. Amazon S3 and Amazon Route 53.

Answer: C

Explanation:

You can easily and inexpensively use AWS to host a website that uses client-side technologies (such as HTML, CSS, and JavaScript) and does not require server-side technologies (such as PHP and ASP.NET). This type of site is called a static website, and is used to display content that does not change frequently. Before you create and deploy a static website, you must plan your architecture to ensure that it meets your requirements. Amazon S3, Amazon Route 53, and Amazon CloudFront would be required in this instance.

Reference: <http://docs.aws.amazon.com/gettingstarted/latest/swlh/website-hosting-intro.html>

NEW QUESTION 106

You are planning and configuring some EBS volumes for an application. In order to get the most performance out of your EBS volumes, you should attach them to an instance with enough to support your volumes.

- A. Redundancy
- B. Storage
- C. Bandwidth
- D. Memory

Answer: C

Explanation:

When you plan and configure EBS volumes for your application, it is important to consider the configuration of the instances that you will attach the volumes to. In order to get the most performance out of your EBS volumes, you should attach them to an instance with enough bandwidth to support your volumes, such as an EBS-optimized instance or an instance with 10 Gigabit network connectivity. This is especially important when you use General Purpose (SSD) or Provisioned IOPS (SSD) volumes, or when you stripe multiple volumes together in a RAID configuration.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-ec2-config.html>

NEW QUESTION 108

Can a single EBS volume be attached to multiple EC2 instances at the same time?

- A. Yes
- B. No
- C. Only for high-performance EBS volumes.
- D. Only when the instances are located in the US region

Answer: B

Explanation:

You can't attach an EBS volume to multiple EC2 instances. This is because it is equivalent to using a single hard drive with many computers at the same time.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AmazonEBS.html>

NEW QUESTION 113

A user is hosting a website in the US West-1 region. The website has the highest client base from the Asia-Pacific (Singapore / Japan) region. The application is accessing data from S3 before serving it to client. Which of the below mentioned regions gives a better performance for S3 objects?

- A. Japan
- B. Singapore
- C. US East
- D. US West-1

Answer: D

Explanation:

Access to Amazon S3 from within Amazon EC2 in the same region is fast. In this aspect, though the client base is Singapore, the application is being hosted in the US West-1 region. Thus, it is recommended that S3 objects be stored in the US-West-1 region.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 116

You have been asked to tighten up the password policies in your organization after a serious security breach, so you need to consider every possible security measure. Which of the following is not an account password policy for IAM Users that can be set?

- A. Force IAM users to contact an account administrator when the user has allowed his or her password to expire.
- B. A minimum password length.
- C. Force IAM users to contact an account administrator when the user has entered his password incorrectly.
- D. Prevent IAM users from reusing previous password

Answer: C

Explanation:

IAM users need passwords in order to access the AWS Management Console. (They do not need passwords if they will access AWS resources programmatically by using the CLI, AWS SDKs, or the APIs.)

You can use a password policy to do these things: Set a minimum password length.

Require specific character types, including uppercase letters, lowercase letters, numbers, and non-alphanumeric characters. Be sure to remind your users that passwords are case sensitive. Allow all IAM users to change their own passwords.

Require IAM users to change their password after a specified period of time (enable password expiration). Prevent IAM users from reusing previous passwords.

Force IAM users to contact an account administrator when the user has allowed his or her password to expire.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_ManagingPasswordPolicies.html

NEW QUESTION 121

In Amazon EC2, what is the limit of Reserved Instances per Availability Zone each month?

- A. 5
- B. 20
- C. 50
- D. 10

Answer: B

Explanation:

There are 20 Reserved Instances per Availability Zone in each month.

Reference: http://docs.aws.amazon.com/general/latest/gr/aws_service_limits.html

NEW QUESTION 126

You have just set up your first Elastic Load Balancer (ELB) but it does not seem to be configured properly. You discover that before you start using ELB, you have to configure the listeners for your load balancer. Which protocols does ELB use to support the load balancing of applications?

- A. HTTP and HTTPS
- B. HTTP, HTTPS, TCP, SSL and SSH
- C. HTTP, HTTPS, TCP, and SSL
- D. HTTP, HTTPS, TCP, SSL and SFTP

Answer: C

Explanation:

Before you start using Elastic Load Balancing (ELB), you have to configure the listeners for your load balancer. A listener is a process that listens for connection requests. It is configured with a protocol and a port number for front-end (client to load balancer) and back-end (load balancer to back-end instance) connections. Elastic Load Balancing supports the load balancing of applications using HTTP, HTTPS (secure HTTP), TCP, and SSL (secure TCP) protocols. The HTTPS uses the SSL protocol to establish secure connections over the HTTP layer. You can also use SSL protocol to establish secure connections over the TCP layer.

The acceptable ports for both HTTPS/SSL and HTTP/TCP connections are 25, 80, 443, 465, 587, and 1024-65535.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/elb-listener-config.html>

NEW QUESTION 129

After setting up some EC2 instances you now need to set up a monitoring solution to keep track of these instances and to send you an email when the CPU hits a certain threshold. Which statement below best describes what thresholds you can set to trigger a CloudWatch Alarm?

- A. Set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.
- B. Thresholds need to be set in IAM not CloudWatch
- C. Only default thresholds can be set you can't choose your own thresholds.
- D. Set a target value and choose whether the alarm will trigger when the value hits this threshold

Answer: A

Explanation:

Amazon CloudWatch is a monitoring service for AWS cloud resources and the applications you run on AWS. You can use Amazon CloudWatch to collect and track metrics, collect and monitor log files, and set alarms.

When you create an alarm, you first choose the Amazon CloudWatch metric you want it to monitor. Next, you choose the evaluation period (e.g., five minutes or one hour) and a statistical value to measure (e.g., Average or Maximum).

To set a threshold, set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.

Reference: <http://aws.amazon.com/cloudwatch/faqs/>

NEW QUESTION 130

What is the data model of DynamoDB?

- A. Since DynamoDB is schema-less, there is no data model.
- B. "Items", with Keys and one or more Attribute; and "Attribute", with Name and Value.
- C. "Table", a collection of Items; "Items", with Keys and one or more Attribute; and "Attribute", with Name and Value.
- D. "Database", which is a set of "Tables", which is a set of "Items", which is a set of "Attributes".

Answer: C

Explanation:

The data model of DynamoDB is: "Table", a collection of Items;

"Items", with Keys and one or more Attribute; "Attribute", with Name and Value.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/DataModel.html>

NEW QUESTION 135

A favored client needs you to quickly deploy a database that is a relational database service with minimal administration as he wants to spend the least amount of time administering it. Which database would be the best option?

- A. Amazon SimpleDB
- B. Your choice of relational AMs on Amazon EC2 and EBS.
- C. Amazon RDS

D. Amazon Redshift

Answer: C

Explanation:

Amazon Relational Database Service (Amazon RDS) is a web service that makes it easy to set up, operate, and scale a relational database in the cloud. It provides cost-efficient and resizable capacity while managing time-consuming database administration tasks, freeing you up to focus on your applications and business.

Amazon RDS gives you access to the capabilities of a familiar MySQL, Oracle, SQL Server, or PostgreSQL database engine. This means that the code, applications, and tools you already use today with your existing databases can be used with Amazon RDS. Amazon RDS automatically patches the database software and backs up your database, storing the backups for a user-defined retention period and enabling point-in-time recovery.

Reference: https://aws.amazon.com/running_databases/#rds_anchor

NEW QUESTION 136

How many types of block devices does Amazon EC2 support?

- A. 4
- B. 5
- C. 2
- D. 1

Answer: C

Explanation:

Amazon EC2 supports 2 types of block devices. Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/block-device-mapping-concepts.html>

NEW QUESTION 138

A user wants to increase the durability and availability of the EBS volume. Which of the below mentioned actions should he perform?

- A. Take regular snapshots.
- B. Create an AML.
- C. Create EBS with higher capacity.
- D. Access EBS regularl

Answer: A

Explanation:

In Amazon Web Services, Amazon EBS volumes that operate with 20 GB or less of modified data since their most recent snapshot can expect an annual failure rate (AFR) between 0.1% and 0.5%. For this reason, to maximize both durability and availability of their Amazon EBS data, the user should frequently create snapshots of the Amazon EBS volumes.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 141

A for a VPC is a collection of subnets (typically private) that you may want to designate for your backend RDS DB Instances.

- A. DB Subnet Set
- B. RDS Subnet Group
- C. DB Subnet Group
- D. DB Subnet Collection

Answer: C

Explanation:

DB Subnet Groups are a set of subnets (one per Availability Zone of a particular region) designed for your DB instances that reside in a VPC. They make easy to manage Multi-AZ deployments as well as the conversion from a Single-AZ to a Mutli-AZ one.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Overview.RDSVPC.html>

NEW QUESTION 143

What is the time period with which metric data is sent to CloudWatch when detailed monitoring is enabled on an Amazon EC2 instance?

- A. 15 minutes
- B. 5 minutes
- C. 1 minute
- D. 45 seconds

Answer: C

Explanation:

By default, Amazon EC2 metric data is automatically sent to CloudWatch in 5-minute periods. However, you can, enable detailed monitoring on an Amazon EC2 instance, which sends data to CloudWatch in

1-minute periods

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-cloudwatch.html>

NEW QUESTION 144

Which of the following features are provided by Amazon EC2?

- A. Exadata Database Machine, Optimized Storage Management, Flashback Technology, and Data Warehousing
- B. Instances, Amazon Machine Images (AMIs), Key Pairs, Amazon EBS Volumes, Firewall, Elastic IP address, Tags, and Virtual Private Clouds (VPCs)
- C. Real Application Clusters (RAC), ElastiCache Machine Images (EMIs), Data Warehousing, Flashback Technology, Dynamic IP address
- D. Exadata Database Machine, Real Application Clusters (RAC), Data Guard, Table and Index Partitioning, and Data Pump Compression

Answer: B

Explanation:

Amazon EC2 provides the following features:

- Virtual computing environments, known as instances;
- Pre-configured templates for your instances, known as Amazon Machine Images (AMIs), that package the bits you need for your server (including the operating system and additional software)
- Various configurations of CPU, memory, storage, and networking capacity for your instances, known as instance types
- Secure login information for your instances using key pairs (AWS stores the public key, and you store the private key in a secure place)
- Storage volumes for temporary data that's deleted when you stop or terminate your instance, known as instance store volumes
- Persistent storage volumes for your data using Amazon Elastic Block Store (Amazon EBS), known as Amazon EBS volumes
- Multiple physical locations for your resources, such as instances and Amazon EBS volumes, known as regions and Availability Zones
- A firewall that enables you to specify the protocols, ports, and source IP ranges that can reach your instances using security groups
- Static IP addresses for dynamic cloud computing, known as Elastic IP addresses
- Metadata, known as tags, that you can create and assign to your Amazon EC2 resources
- Virtual networks you can create that are logically isolated from the rest of the AWS cloud, and that you can optionally connect to your own network, known as virtual private clouds (VPCs).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/concepts.html>

NEW QUESTION 149

In Amazon Elastic Compute Cloud, which of the following is used for communication between instances in the same network (EC2-Classic or a VPC)?

- A. Private IP addresses
- B. Elastic IP addresses
- C. Static IP addresses
- D. Public IP addresses

Answer: A

Explanation:

A private IP address is an IP address that's not reachable over the Internet. You can use private IP addresses for communication between instances in the same network (EC2-Classic or a VPC). Reference:

<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-instance-addressing.html>

NEW QUESTION 150

AWS Identity and Access Management is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS. In addition to supporting IAM user policies, some services support resource-based permissions. Which of the following services are supported by resource-based permissions?

- A. Amazon SNS, and Amazon SQS and AWS Direct Connect.
- B. Amazon S3 and Amazon SQS and Amazon ElastiCache.
- C. Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.
- D. Amazon Glacier, Amazon SNS, and Amazon CloudWatch

Answer: C

Explanation:

In addition to supporting IAM user policies, some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Resource-based permissions are supported by Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_SpecificProducts.html

NEW QUESTION 155

You are setting up your first Amazon Virtual Private Cloud (Amazon VPC) network so you decide you should probably use the AWS Management Console and the VPC Wizard. Which of the following is not an option for network architectures after launching the "Start VPC Wizard" in Amazon VPC page on the AWS Management Console?

- A. VPC with a Single Public Subnet Only
- B. VPC with a Public Subnet Only and Hardware VPN Access
- C. VPC with Public and Private Subnets and Hardware VPN Access
- D. VPC with a Private Subnet Only and Hardware VPN Access

Answer: B

Explanation:

Amazon VPC enables you to build a virtual network in the AWS cloud - no VPNs, hardware, or physical datacenters required.

Your AWS resources are automatically provisioned in a ready-to-use default VPC. You can choose to create additional VPCs by going to Amazon VPC page on the AWS Management Console and click on the "Start VPC Wizard" button.

You'll be presented with four basic options for network architectures. After selecting an option, you can modify the size and IP address range of the VPC and its subnets. If you select an option with Hardware VPN Access, you will need to specify the IP address of the VPN hardware on your network. You can modify the VPC to add more subnets or add or remove gateways at any time after the VPC has been created.

The four options are:

VPC with a Single Public Subnet Only VPC with Public and Private Subnets

VPC with Public and Private Subnets and Hardware VPN Access VPC with a Private Subnet Only and Hardware VPN Access Reference:

<https://aws.amazon.com/vpc/faqs/>

NEW QUESTION 157

You have been given a scope to set up an AWS Media Sharing Framework for a new start up photo sharing company similar to flickr. The first thing that comes to mind about this is that it will obviously need a huge amount of persistent data storage for this framework. Which of the following storage options would be appropriate for persistent storage?

- A. Amazon Glacier or Amazon S3
- B. Amazon Glacier or AWS Import/Export
- C. AWS Import/Export or Amazon CloudFront
- D. Amazon EBS volumes or Amazon S3

Answer: D

Explanation:

Persistent storage-If you need persistent virtual disk storage similar to a physical disk drive for files or other data that must persist longer than the lifetime of a single Amazon EC2 instance, Amazon EBS volumes or Amazon S3 are more appropriate.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 162

A user has created an ELB with Auto Scaling. Which of the below mentioned offerings from ELB helps the user to stop sending new requests traffic from the load balancer to the EC2 instance when the instance is being deregistered while continuing in-flight requests?

- A. ELB sticky session
- B. ELB deregistration check
- C. ELB auto registration Off
- D. ELB connection draining

Answer: D

Explanation:

The Elastic Load Balancer connection draining feature causes the load balancer to stop sending new requests to the back-end instances when the instances are deregistering or become unhealthy, while ensuring that in-flight requests continue to be served.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/config-conn-drain.html>

NEW QUESTION 166

A user is planning to host a mobile game on EC2 which sends notifications to active users on either high score or the addition of new features. The user should get this notification when he is online on his mobile device. Which of the below mentioned AWS services can help achieve this functionality?

- A. AWS Simple Notification Service.
- B. AWS Simple Email Service.
- C. AWS Mobile Communication Service.
- D. AWS Simple Queue Service.

Answer: A

Explanation:

Amazon Simple Notification Service (Amazon SNS) is a fast, flexible, and fully managed push messaging service. Amazon SNS makes it simple and cost-effective to push to mobile devices, such as iPhone, iPad, Android, Kindle Fire, and internet connected smart devices, as well as pushing to other distributed services.

Reference: <http://aws.amazon.com/sns>

NEW QUESTION 171

A user has hosted an application on EC2 instances. The EC2 instances are configured with ELB and Auto Scaling. The application server session time out is 2 hours. The user wants to configure connection draining to ensure that all in-flight requests are supported by ELB even though the instance is being deregistered. What time out period should the user specify for connection draining?

- A. 1 hour
- B. 30 minutes
- C. 5 minutes
- D. 2 hours

Answer: A

Explanation:

The Elastic Load Balancer connection draining feature causes the load balancer to stop sending new requests to the back-end instances when the instances are deregistering or become unhealthy, while ensuring that in-flight requests continue to be served. The user can specify a maximum time of 3600 seconds (1 hour) for the load balancer to keep the connections alive before reporting the instance as deregistered. If the user does not specify the maximum timeout period, by default, the load balancer will close the connections to the deregistering instance after 300 seconds.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/config-conn-drain.html>

NEW QUESTION 175

You need to quickly set up an email-sending service because a client needs to start using it in the next hour. Amazon Simple Email Service (Amazon SES) seems to be the logical choice but there are several options available to set it up. Which of the following options to set up SES would best meet the needs of the client?

- A. Amazon SES console
- B. AWS CloudFormation
- C. SMTP Interface
- D. AWS Elastic Beanstalk

Answer: A

Explanation:

Amazon SES is an outbound-only email-sending service that provides an easy, cost-effective way for you to send email.

There are several ways that you can send an email by using Amazon SES. You can use the Amazon SES console, the Simple Mail Transfer Protocol (SMTP) interface, or you can call the Amazon SES API. Amazon SES console—This method is the quickest way to set up your system

Reference: <http://docs.aws.amazon.com/ses/latest/DeveloperGuide/Welcome.html>

NEW QUESTION 177

Can you move a Reserved Instance from one Availability Zone to another?

- A. Yes, but each Reserved Instance is associated with a specific Region that cannot be changed.
- B. Yes, only in US-West-2.
- C. Yes, only in US-East-1.
- D. No

Answer: A

Explanation:

Each Reserved Instance is associated with a specific Region, which is fixed for the lifetime of the reservation and cannot be changed. Each reservation can, however, be used in any of the available AZs within the associated Region.

Reference: <https://aws.amazon.com/rds/faqs/>

NEW QUESTION 178

An application hosted at the EC2 instance receives an HTTP request from ELB. The same request has an X-Forwarded-For header, which has three IP addresses. Which system's IP will be a part of this header?

- A. Previous Request IP address.
- B. Client IP address.
- C. All of the answers listed here.
- D. Load Balancer IP address

Answer: C

Explanation:

When a user sends a request to ELB over HTTP/HTTPS, the request header log at the instance will only receive the IP of ELB. This is because ELB is the interceptor between the EC2 instance and the client request. To get the client IP, use the header X-Forwarded-For in header. The client IP address in the X-Forwarded-For request header is followed by the IP addresses of each successive proxy that passes along the request. The last IP address is the IP address that connects to the back-end application instance. e.g. if the HTTP request already has a header when it reaches the Load Balancer, the IP address from which the request came is appended at the end of the header followed by the IP address of the Load Balancer. In such cases, the X-Forwarded-For request header takes the following form:

X-Forwarded-For: clientIPAddress, previousRequestIPAddress, LoadBalancerIPAddress. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/TerminologyandKeyConcepts.html>

NEW QUESTION 183

You need to set up a security certificate for a client's e-commerce website as it will use the HTTPS protocol. Which of the below AWS services do you need to access to manage your SSL server certificate?

- A. AWS Directory Service
- B. AWS Identity & Access Management
- C. AWS CloudFormation
- D. Amazon Route 53

Answer: B

Explanation:

AWS Identity and Access Management (IAM) is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS.

All your SSL server certificates are managed by AWS Identity and Access management (IAM). Reference:

<http://docs.aws.amazon.com/IAM/latest/UserGuide/ManagingServerCerts.html>

NEW QUESTION 188

A web design company currently runs several FTP servers that their 250 customers use to upload and download large graphic files. They wish to move this system to AWS to make it more scalable, but they wish to maintain customer privacy and keep costs to a minimum.

What AWS architecture would you recommend?

- A. Ask their customers to use an S3 client instead of an FTP client.
- B. Create a single S3 bucket. Create an IAM user for each customer. Put the IAM Users in a Group that has an IAM policy that permits access to sub-directories within the bucket via use of the 'username' Policy variable.
- C. Create a single S3 bucket with Reduced Redundancy Storage turned on and ask their customers to use an S3 client instead of an FTP client. Create a bucket for each customer with a Bucket Policy that permits access only to that one customer.
- D. Create an auto-scaling group of FTP servers with a scaling policy to automatically scale-in when minimum network traffic on the auto-scaling group is below a given threshold.
- E. Load a central list of ftp users from S3 as part of the user Data startup script on each Instance.
- F. Create a single S3 bucket with Requester Pays turned on and ask their customers to use an S3 client instead of an FTP client. Create a bucket for each customer with a Bucket Policy that permits access only to that one customer.

Answer: A

NEW QUESTION 191

Your application is using an ELB in front of an Auto Scaling group of web/application servers deployed across two AZs and a Multi-AZ RDS Instance for data persistence.

The database CPU is often above 80% usage and 90% of I/O operations on the database are reads. To improve performance you recently added a single-node Memcached ElastiCache Cluster to cache frequent DB query results. In the next weeks the overall workload is expected to grow by 30%.

Do you need to change anything in the architecture to maintain the high availability or the application with the anticipated additional load? Why?

- A. Yes, you should deploy two Memcached ElastiCache Clusters in different AZs because the RDS instance will not be able to handle the load if the cache node fails.
- B. No, if the cache node fails you can always get the same data from the DB without having any availability impact.
- C. No, if the cache node fails the automated ElastiCache node recovery feature will prevent any availability impact.
- D. Yes, you should deploy the Memcached ElastiCache Cluster with two nodes in the same AZ as the RDS DB master instance to handle the load if one cache node fails.

Answer: A

Explanation:


ElastiCache for Memcached

The primary goal of caching is typically to offload reads from your database or other primary data source. In most apps, you have hot spots of data that are regularly queried, but only updated periodically. Think of the front page of a blog or news site, or the top 100 leaderboard in an online game. In this type of case, your app can receive dozens, hundreds, or even thousands of requests for the same data before it's updated again. Having your caching layer handle these queries has several advantages. First, it's considerably cheaper to add an in-memory cache than to scale up to a larger database cluster. Second, an in-memory cache is also easier to scale out, because it's easier to distribute an in-memory cache horizontally than a relational database. Last, a caching layer provides a request buffer in the event of a sudden spike in usage. If your app or game ends up on the front page of Reddit or the App Store, it's not unheard of to see a spike that is 10 to 100 times your normal application load. Even if you autoscale your application instances, a I/O request spike will likely make your database very unhappy.


Let's focus on ElastiCache for Memcached first, because it is the best fit for a caching focused solution. We'll revisit Redis later in the paper, and weigh its advantages and disadvantages.

Architecture with ElastiCache for Memcached

When you deploy an ElastiCache Memcached cluster, it sits in your application as a separate tier alongside your database. As mentioned previously, Amazon ElastiCache does not directly communicate with your database tier, or indeed have any particular knowledge of your database. A simplified deployment for a web application looks something like this:

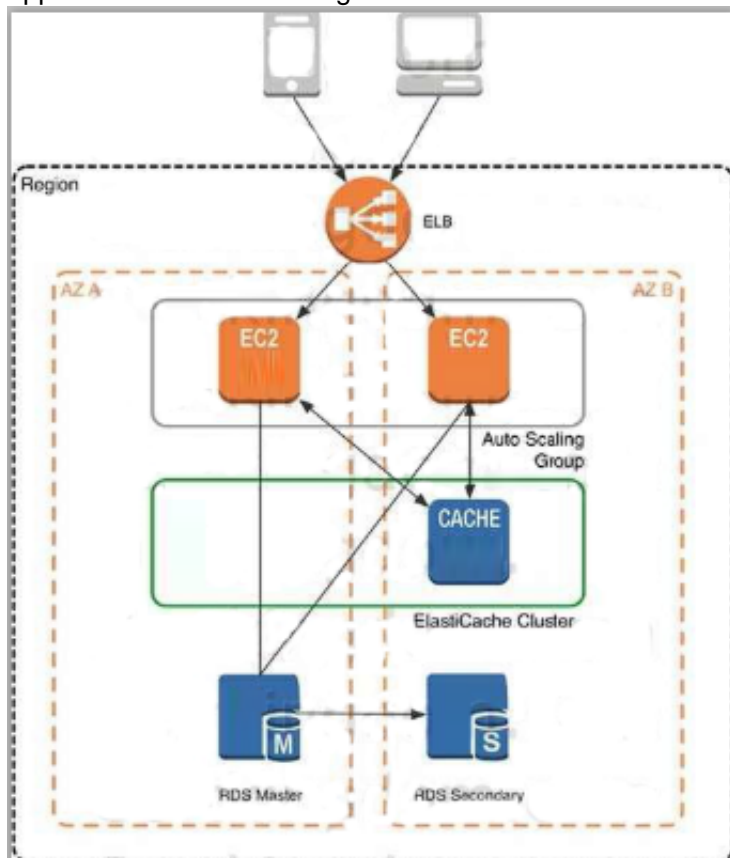


In this architecture diagram, the Amazon EC2 application instances are in an Auto Scaling group, located behind a load balancer using Elastic Load Balancing, which distributes requests among the instances. As requests come into a given EC2 instance, that EC2 instance is responsible for communicating with ElastiCache and the database tier. For development purposes, you can begin with a single ElastiCache node to test your application, and then scale to additional cluster nodes by modifying the ElastiCache cluster. As you add additional cache nodes, the EC2 application instances are able to distribute cache keys across multiple ElastiCache nodes. The most common practice is to use client-side sharding to distribute keys across cache nodes, which we will discuss later in this paper.

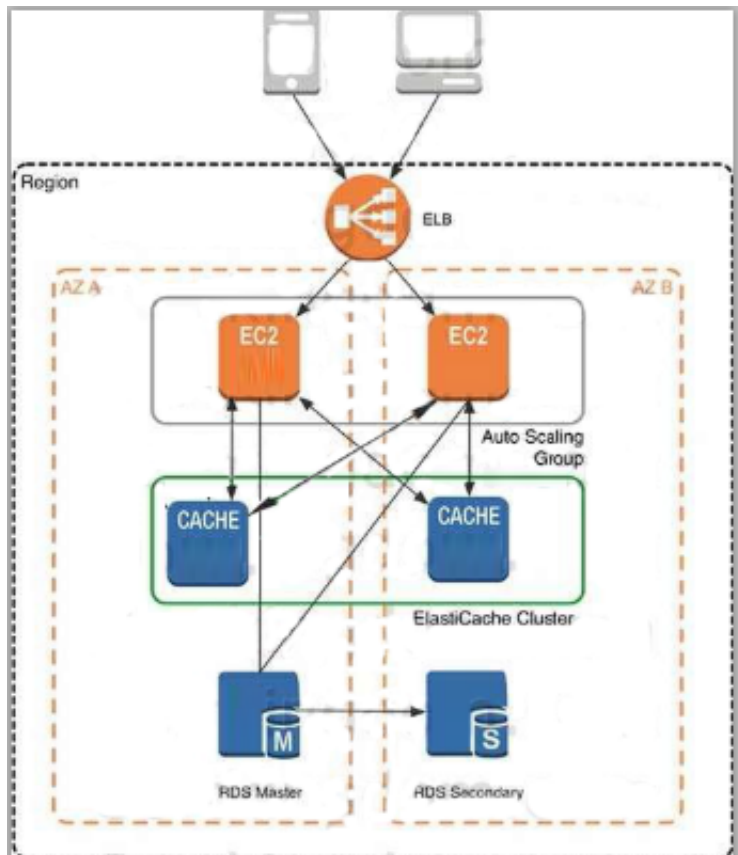

When you launch an ElastiCache cluster, you can choose the Availability Zone(s) that the cluster lives in. For best performance, you should configure your cluster to use the same Availability Zones as your application servers. To launch an ElastiCache cluster in a specific Availability Zone, make sure to specify the Preferred Zone(s) option during cache cluster creation. The Availability Zones that you specify will be where ElastiCache will launch your cache nodes. We recommend that you select Spread Nodes Across Zones, which tells ElastiCache to distribute cache nodes across these zones as evenly as possible. This distribution will mitigate the impact of an Availability Zone disruption on your ElastiCache nodes. The trade-off is that some of the requests from your application to ElastiCache will go to a node in a different Availability Zone, meaning latency will be slightly higher.

For more details, refer to Creating a Cache Cluster in the Amazon ElastiCache User Guide.

As mentioned at the outset, ElastiCache can be coupled with a wide variety of databases. Here is an example architecture that uses Amazon DynamoDB instead of Amazon RDS and IV|ySQL:

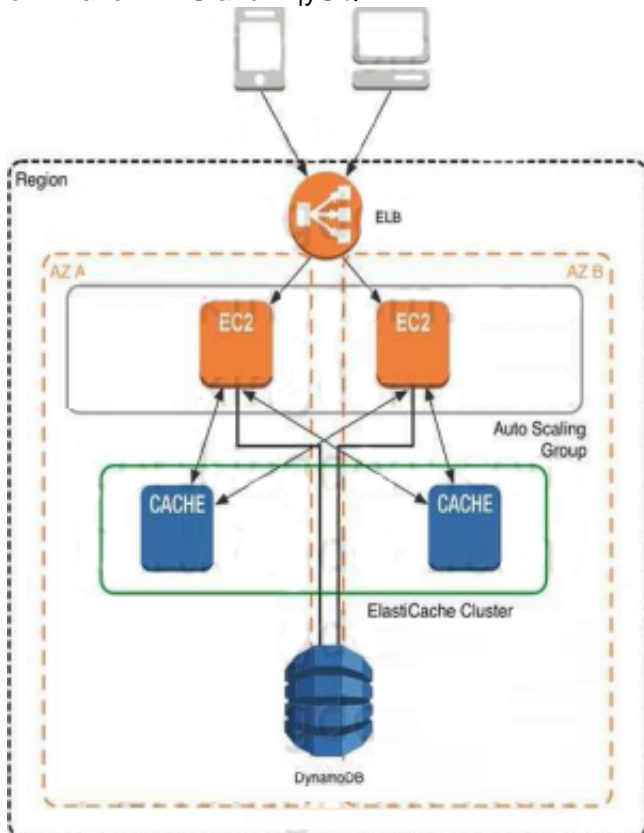

This combination of DynamoDB and ElastiCache is very popular with mobile and game companies, because DynamoDB allows for higher write throughput at lower cost than traditional relational databases. In addition, DynamoDB uses a key-value access pattern similar to ElastiCache, which also simplifies the programming model. Instead of using relational SQL for the primary database but then key-value patterns for the cache, both the primary database and cache can be programmed similarly.

In this architecture pattern, DynamoDB remains the source of truth for data, but application reads are offloaded to ElastiCache for a speed boost.

NEW QUESTION 196

A customer has established an AWS Direct Connect connection to AWS. The link is up and routes are being advertised from the customer's end, however the customer is unable to connect from EC2 instances inside its VPC to servers residing in its datacenter.

Which of the following options provide a viable solution to remedy this situation? (Choose 2 answers)

- A. Add a route to the route table with an IPsec VPN connection as the target.
- B. Enable route propagation to the virtual pinnate gateway (VGW).
- C. Enable route propagation to the customer gateway (CGW).
- D. Modify the route table of all Instances using the 'route' command.
- E. Modify the Instances VPC subnet route table by adding a route back to the customer's on-premises environment.

Answer: AC

NEW QUESTION 198

You are designing Internet connectMty for your VPC. The Web servers must be available on the Internet. The application must have a highly available architecture. Which alternatives should you consider? (Choose 2 answers)

- A. Configure a NAT instance in your VPC Create a default route via the NAT instance and associate it with all subnets Configure a DNS A record that points to the NAT instance public IP address.
- B. Configure a CloudFront distribution and configure the origin to point to the private IP addresses of your Web servers Configure a Route53 CNAME record to your Cloud Front distribution.
- C. Place all your web servers behind ELB Configure a Route53 CNAME to point to the ELB DNS name.
- D. Assign EIPs to all web server
- E. Configure a Route53 record set with all EIP
- F. With health checks and DNS failover.
- G. Configure ELB with an EIP Place all your Web servers behind ELB Configure a Route53 A record that points to the EIP.

Answer: CD

NEW QUESTION 201

You are tasked with moving a legacy application from a virtual machine running inside your datacenter to an Amazon VPC. Unfortunately, this app requires access to a number of on-premises services and no one who configured the app still works for your company. Even worse, there's no documentation for it. What will allow the application running inside the VPC to reach back and access its internal dependencies without being reconfigured? (Choose 3 answers)

- A. An AWS Direct Connect link between the VPC and the network housing the internal services.
- B. An Internet Gateway to allow a VPN connection.
- C. An Elastic IP address on the VPC instance
- D. An IP address space that does not conflict with the one on-premises
- E. Entries in Amazon Route 53 that allow the Instance to resolve its dependencies' IP addresses
- F. A VM Import of the current virtual machine

Answer: ADF

Explanation:

AWS Direct Connect

AWS Direct Connect makes it easy to establish a dedicated network connection from your premises to AWS. Using AWS Direct Connect, you can establish private connectivity between AWS, your datacenter, office, or colocation environment, which in many cases can reduce your network costs, increase bandwidth throughput, and provide a more consistent network experience than Internet-based connections.

AWS Direct Connect lets you establish a dedicated network connection between your network and one of the AWS Direct Connect locations. Using industry standard 802.1Q VLANs, this dedicated connection can be partitioned into multiple virtual interfaces. This allows you to use the same connection to access public resources such as objects stored in Amazon S3 using public IP address space, and private resources

such as Amazon EC2 instances running within an Amazon Virtual Private Cloud (VPC) using private IP space, while maintaining network separation between the public and private environments. Virtual interfaces can be reconfigured at any time to meet your changing needs.

What is AWS Direct Connect?

AWS Direct Connect links your internal network to an AWS Direct Connect location over a standard 1 gigabit or 10 gigabit Ethernet fiber-optic cable. One end of the cable is connected to your router, the other to an AWS Direct Connect router. With this connection in place, you can create virtual interfaces directly to the AWS cloud (for example, to Amazon Elastic Compute Cloud (Amazon EC2) and Amazon Simple Storage Service (Amazon S3)) and to Amazon Virtual Private Cloud (Amazon VPC), bypassing Internet service providers in your network path. An AWS Direct Connect location provides access to Amazon Web Services in the region it is associated with, as well as access to other US regions. For example, you can provision a single connection to any AWS Direct Connect location in the US and use it to access public AWS services in all US Regions and AWS GovCloud (US).

The following diagram shows how AWS Direct Connect interfaces with your network.

Requirements

To use AWS Direct Connect, your network must meet one of the following conditions:

Your network is colocated with an existing AWS Direct Connect location. For more information on available AWS Direct Connect locations, go to

<http://aws.amazon.com/directconnect/>.

You are working with an AWS Direct Connect partner who is a member of the AWS Partner Network (APN). For a list of AWS Direct Connect partners who can help you connect, go to <http://aws.amazon.com/directconnect>

You are working with an independent service provider to connect to AWS Direct Connect. In addition, your network must meet the following conditions:

Connections to AWS Direct Connect require single mode fiber, 1000BASE-LX (1310nm) for 1 gigabit Ethernet, or 10GBASE-LR (1310nm) for 10 gigabit Ethernet.

Auto Negotiation for the port must be disabled. You must support 802.1Q VLANs across these connections.

Your network must support Border Gateway Protocol (BGP) and BGP MD5 authentication. Optionally, you may configure Bidirectional Forwarding Detection (BFD).

To connect to Amazon Virtual Private Cloud (Amazon VPC), you must first do the following: Provide a private Autonomous System Number (ASN). Amazon allocates a private IP address in the

169.x.x.x range to you.

Create a virtual private gateway and attach it to your VPC. For more information about creating a virtual private gateway, see Adding a Hardware Virtual Private Gateway to Your VPC in the Amazon VPC User Guide.

To connect to public AWS products such as Amazon EC2 and Amazon S3, you need to provide the following:

A public ASN that you own (preferred) or a private ASN.

Public IP addresses (/31) (that is, one for each end of the BGP session) for each BGP session. If you do not have public IP addresses to assign to this connection, log on to AWS and then open a ticket with AWS Support.

The public routes that you will advertise over BGP.

NEW QUESTION 202

An enterprise wants to use a third-party SaaS application. The SaaS application needs to have access to issue several API commands to discover Amazon EC2 resources running within the enterprise's account. The enterprise has internal security policies that require any outside access to their environment must conform to the principles of least privilege and there must be controls in place to ensure that the credentials used by the SaaS vendor cannot be used by any other third party. Which of the following would meet all of these conditions?

- A. From the AWS Management Console, navigate to the Security Credentials page and retrieve the access and secret key for your account.
- B. Create an IAM user within the enterprise account, assign a user policy to the IAM user that allows only the actions required by the SaaS application, create a new access and secret key for the user, and provide these credentials to the SaaS provider.
- C. Create an IAM role for cross-account access, allow the SaaS provider's account to assume the role, and assign it a policy that allows only the actions required by the SaaS application.
- D. Create an IAM role for EC2 instances, assign it a policy that allows only the actions required for the SaaS application to work, provide the role ARN to the SaaS provider to use when launching their application instances.

Answer: C

Explanation:

Granting Cross-account Permission to objects It Does Not Own

In this example scenario, you own a bucket and you have enabled other AWS accounts to upload objects. That is, your bucket can have objects that other AWS accounts own.

Now, suppose as a bucket owner, you need to grant cross-account permission on objects, regardless of who the owner is, to a user in another account. For example, that user could be a billing application that needs to access object metadata. There are two core issues:

The bucket owner has no permissions on those objects created by other AWS accounts. So for the bucket owner to grant permissions on objects it does not own, the object owner, the AWS account that created the objects, must first grant permission to the bucket owner. The bucket owner can then delegate those permissions.

Bucket owner account can delegate permissions to users in its own account but it cannot delegate permissions to other AWS accounts, because cross-account delegation is not supported.

In this scenario, the bucket owner can create an AWS Identity and Access Management (IAM) role with permission to access objects, and grant another AWS account permission to assume the role temporarily enabling it to access objects in the bucket.

Background: Cross-Account Permissions and Using IAM Roles

IAM roles enable several scenarios to delegate access to your resources, and cross-account access is

one of the key scenarios. In this example, the bucket owner, Account A, uses an IAM role to temporarily delegate object access cross-account to users in another AWS account, Account C. Each IAM role you create has two policies attached to it:

A trust policy identifying another AWS account that can assume the role.

An access policy defining what permissions—for example, s3:GetObject—are allowed when someone assumes the role. For a list of permissions you can specify in a policy, see [Specifying Permissions in a Policy](#).

The AWS account identified in the trust policy then grants its user permission to assume the role. The user can then do the following to access objects:

Assume the role and, in response, get temporary security credentials. Using the temporary security credentials, access the objects in the bucket.

For more information about IAM roles, go to [Roles \(Delegation and Federation\)](#) in [IAM User Guide](#). The following is a summary of the walkthrough steps:

Account A administrator user attaches a bucket policy granting Account B conditional permission to upload objects.

Account A administrator creates an IAM role, establishing trust with Account C, so users in that account can access Account A. The access policy attached to the role limits what user in Account C can do when the user accesses Account A.

Account B administrator uploads an object to the bucket owned by Account A, granting full —control permission to the bucket owner.

Account C administrator creates a user and attaches a user policy that allows the user to assume the role. User in Account C first assumes the role, which returns the user temporary security credentials.

Using those temporary credentials, the user then accesses objects in the bucket.

For this example, you need three accounts. The following table shows how we refer to these accounts and the administrator users in these accounts. Per IAM guidelines (see [About Using an Administrator User to Create Resources and Grant Permissions](#)) we do not use the account root credentials in this walkthrough. Instead, you create an administrator user in each account and use those credentials in creating resources and granting them permissions

NEW QUESTION 207

An AWS customer is deploying an application that is composed of an AutoScaling group of EC2 Instances.

The customer's security policy requires that every outbound connection from these instances to any other service within the customer's Virtual Private Cloud must be authenticated using a unique x.509 certificate that contains the specific instance-id.

In addition, x.509 certificates must be designed by the customer's Key management service in order to be trusted for authentication.

Which of the following configurations will support these requirements?

- A. Configure an IAM Role that grants access to an Amazon S3 object containing a signed certificate and configure the Auto Scaling group to launch instances with this role. Have the instances bootstrap get the certificate from Amazon S3 upon first boot.
- B. Embed a certificate into the Amazon Machine Image that is used by the Auto Scaling group. Have the launched instances generate a certificate signature request with the instance's assigned instance-id to the Key management service for signature.
- C. Configure the Auto Scaling group to send an SNS notification of the launch of a new instance to the trusted key management service.
- D. Have the Key management service generate a signed certificate and send it directly to the newly launched instance.
- E. Configure the launched instances to generate a new certificate upon first boot. Have the Key management service poll the AutoScaling group for associated instances and send new instances a certificate signature (that contains the specific instance-id).

Answer: A

NEW QUESTION 212

Your Fortune 500 company has undertaken a TCO analysis evaluating the use of Amazon S3 versus acquiring more hardware. The outcome was that all employees would be granted access to use Amazon S3 for storage of their personal documents.

Which of the following will you need to consider so you can set up a solution that incorporates single sign-on from your corporate AD or LDAP directory and restricts access for each user to a designated user folder in a bucket? (Choose 3 Answers)

- A. Setting up a federation proxy or identity provider
- B. Using AWS Security Token Service to generate temporary tokens
- C. Tagging each folder in the bucket
- D. Configuring IAM role
- E. Setting up a matching IAM user for every user in your corporate directory that needs access to a folder in the bucket

Answer: ABD

NEW QUESTION 214

Your company policies require encryption of sensitive data at rest. You are considering the possible options for protecting data while storing it at rest on an EBS data volume, attached to an EC2 instance. Which of these options would allow you to encrypt your data at rest? (Choose 3 answers)

- A. Implement third party volume encryption tools
- B. Do nothing as EBS volumes are encrypted by default
- C. Encrypt data inside your applications before storing it on EBS
- D. Encrypt data using native data encryption drivers at the file system level
- E. Implement SSL/TLS for all services running on the server

Answer: ACD

NEW QUESTION 217

Your team has a tomcat-based Java application you need to deploy into development, test and production environments. After some research, you opt to use Elastic Beanstalk due to its tight integration with your developer tools and RDS due to its ease of management. Your QA team lead points out that you need to roll a sanitized set of production data into your environment on a nightly basis. Similarly, other software teams in your org want access to that same restored data via their EC2 instances in your VPC. The

optimal setup for persistence and security that meets the above requirements would be the following.

- A. Create your RDS instance as part of your Elastic Beanstalk definition and alter its security group to allow access to it from hosts in your application subnets.
- B. Create your RDS instance separately and add its IP address to your application's DB connection strings in your code. Alter its security group to allow access to it from hosts within your VPC's IP address block.
- C. Create your RDS instance separately and pass its DNS name to your app's DB connection string as an environment variable.
- D. Create a security group for client machines and add it as a valid source for DB traffic to the security group of the RDS instance itself.
- E. Create your RDS instance separately and pass its DNS name to your app's DB connection string as an environment variable. Alter its security group to allow access to it from hosts in your application subnets.

Answer: A

NEW QUESTION 219

A web company is looking to implement an intrusion detection and prevention system into their deployed VPC. This platform should have the ability to scale to thousands of instances running inside of the VPC. How should they architect their solution to achieve these goals?

- A. Configure an instance with monitoring software and the elastic network interface (ENI) set to promiscuous mode packet sniffing to see all traffic across the VPC.
- B. Create a second VPC and route all traffic from the primary application VPC through the second VPC where the scalable virtualized IDS/IPS platform resides.
- C. Configure servers running in the VPC using the host-based 'route' commands to send all traffic through the platform to a scalable virtualized IDS/IPS.
- D. Configure each host with an agent that collects all network traffic and sends that traffic to the IDS/IPS platform for inspection.

Answer: C

NEW QUESTION 220

A web-startup runs its very successful social news application on Amazon EC2 with an Elastic Load Balancer, an Auto-Scaling group of Java/Tomcat application servers, and DynamoDB as data store. The main web-application best runs on m2.xlarge instances since it is highly memory-bound. Each new deployment requires semi-automated creation and testing of a new AM for the application servers which takes quite a while and is therefore only done once per week. Recently, a new chat feature has been implemented in Node.js and waits to be integrated in the architecture. First tests show that the new component is CPU bound. Because the company has some experience with using Chef, they decided to streamline the deployment process and use AWS OpsWorks as an application life cycle tool to simplify management of the application and reduce the deployment cycles.

What configuration in AWS OpsWorks is necessary to integrate the new chat module in the most cost-efficient and flexible way?

- A. Create one AWS OpsWorks stack, create one AWS OpsWorks layer, create one custom recipe
- B. Create one AWS OpsWorks stack, create two AWS OpsWorks layers, create one custom recipe
- C. Create two AWS OpsWorks stacks, create two AWS OpsWorks layers, create one custom recipe
- D. Create two AWS OpsWorks stacks, create two AWS OpsWorks layers, create two custom recipes

Answer: C

NEW QUESTION 221

Before I delete an EBS volume, what can I do if I want to recreate the volume later?

- A. Create a copy of the EBS volume (not a snapshot)
- B. Store a snapshot of the volume
- C. Download the content to an EC2 instance
- D. Back up the data in to a physical disk

Answer: B

NEW QUESTION 222

Select the most correct

The device name /dev/sda1 (within Amazon EC2) is _

- A. Possible for EBS volumes
- B. Reserved for the root device
- C. Recommended for EBS volumes
- D. Recommended for instance store volumes

Answer: B

NEW QUESTION 226

What is the Reduced Redundancy option in Amazon S3?

- A. Less redundancy for a lower cost.
- B. It doesn't exist in Amazon S3, but in Amazon EBS.
- C. It allows you to destroy any copy of your files outside a specific jurisdiction.
- D. It doesn't exist at all

Answer: A

NEW QUESTION 230

Fill in the blanks: Resources that are created in AWS are identified by a unique identifier called an

- A. Amazon Resource Number
- B. Amazon Resource Nametag
- C. Amazon Resource Name
- D. Amazon Resource Namespace

Answer: C

NEW QUESTION 232

While creating an Amazon RDS DB, your first task is to set up a DB _ that controls what IP addresses or EC2 instances have access to your DB Instance.

- A. Security Pool
- B. Secure Zone
- C. Security Token Pool
- D. Security Group

Answer: D

NEW QUESTION 233

Every user you create in the IAM system starts with _ _

- A. Partial permissions
- B. Full permissions
- C. No permissions

Answer: C

NEW QUESTION 234

What does Amazon Elastic Beanstalk provide?

- A. A scalable storage appliance on top of Amazon Web Services.
- B. An application container on top of Amazon Web Services.
- C. A service by this name doesn't exist.
- D. A scalable cluster of EC2 instance

Answer: B

NEW QUESTION 239

True or False: When using IAM to control access to your RDS resources, the key names that can be used are case sensitive. For example, aws:CurrentTime is NOT equivalent to AWS:currenttime.

- A. TRUE
- B. FALSE

Answer: A

NEW QUESTION 244

Can we attach an EBS volume to more than one EC2 instance at the same time?

- A. No
- B. Yes.
- C. Only EC2-optimized EBS volumes.
- D. Only in read mod

Answer: A

NEW QUESTION 249

True or False: Automated backups are enabled by default for a new DB Instance.

- A. TRUE
- B. FALSE

Answer: A

NEW QUESTION 253

Amazon RDS automated backups and DB Snapshots are currently supported for only the _ _ storage engine

- A. InnoDB
- B. MyISAM

Answer: A

NEW QUESTION 255

In the Amazon cloudwatch, which metric should I be checking to ensure that your DB Instance has enough free storage space?

- A. Free Storage
- B. Free Storage Space
- C. Free Storage Volume
- D. Free DB Storage Space

Answer: B

NEW QUESTION 259

What does a "Domain" refer to in Amazon SWF?

- A. A security group in which only tasks inside can communicate with each other
- B. A special type of worker
- C. A collection of related Workflows
- D. The DNS record for the Amazon SWF service

Answer: C

NEW QUESTION 260

Is creating a Read Replica of another Read Replica supported?

- A. Only in certain regions
- B. Only with MSSQL based RDS
- C. Only for Oracle RDS types
- D. No

Answer: D

NEW QUESTION 262

Can Amazon S3 uploads resume on failure or do they need to restart?

- A. Restart from beginning
- B. You can resume them, if you flag the "resume on failure" option before uploading.
- C. Resume on failure
- D. Depends on the file size

Answer: C

NEW QUESTION 265

True or False: Manually created DB Snapshots are deleted after the DB Instance is deleted.

- A. TRUE
- B. FALSE

Answer: A

NEW QUESTION 270

What is Amazon Glacier?

- A. You mean Amazon "Iceberg": it's a low-cost storage service.
- B. A security tool that allows to "freeze" an EBS volume and perform computer forensics on it.
- C. A low-cost storage service that provides secure and durable storage for data archiving and backup.
- D. It's a security tool that allows to "freeze" an EC2 instance and perform computer forensics on it

Answer: C

NEW QUESTION 273

What happens to the data on an instance if the instance reboots (intentionally or unintentionally)?

- A. Data will be lost
- B. Data persists
- C. Data may persist however cannot be sure

Answer: B

NEW QUESTION 278

IAM provides several policy templates you can use to automatically assign permissions to the groups you create. The _ policy template gives the Admins group permission to access all account resources, except your AWS account information

- A. Read Only Access
- B. Power User Access
- C. AWS CloudFormation Read Only Access
- D. Administrator Access

Answer: D

NEW QUESTION 281

For each DB Instance class, what is the maximum size of associated storage capacity?

- A. 5GB
- B. 1 TB
- C. 2TB
- D. 500GB

Answer: B

NEW QUESTION 284

Using Amazon IAM, can I give permission based on organizational groups?

- A. Yes but only in certain cases
- B. No
- C. Yes always

Answer: C

NEW QUESTION 289

What is an isolated database environment running in the cloud (Amazon RDS) called?

- A. DB Instance
- B. DB Sewer
- C. DB Unit
- D. DB Volume

Answer: A

NEW QUESTION 292

When should I choose Provisioned IOPS over Standard RDS storage?

- A. If you have batch-oriented workloads
- B. If you use production online transaction processing (OLTP) workloads.
- C. If you have workloads that are not sensitive to consistent performance

Answer: A

NEW QUESTION 293

Are Resernd Instances available for Multi-AZ Deployments?

- A. Only for Cluster Compute instances
- B. Yes for all instance types
- C. Only for M3 instance types
- D. No

Answer: B

NEW QUESTION 297

Which service enables AWS customers to manage users and permissions in AWS?

- A. AWS Access Control Service (ACS}
- B. AWS Identity and Access Management (IAM}
- C. AWS Identity Manager (AIM}

Answer: B

NEW QUESTION 298

MySQL installations default to port __.

- A. A.3306B.443
- B. 80
- C. 1158

Answer: A

NEW QUESTION 302

If I want to run a database in an Amazon instance, which is the most recommended Amazon storage opHon?

- A. Amazon Instance Storage
- B. Amazon EBS
- C. You can't run a database inside an Amazon instance.
- D. Amazon 53

Answer: B

NEW QUESTION 303

True or False: If you add a tag that has the same key as an existing tag on a DB Instance, the new value overwrites the old value.

- A. FALSE
- B. TRUE

Answer: B

NEW QUESTION 306

Making your snapshot public shares all snapshot data with everyone. Can the snapshots with AWS Market place product codes be made public?

- A. No
- B. Yes

Answer: B

NEW QUESTION 308

Fill in the blanks: "To ensure failover capabilities, consider using a _ for incoming traffic on a network interface".

- A. primary public IP
- B. secondary private I P
- C. secondary public I P
- D. add on secondary IP

Answer: B

NEW QUESTION 311

If I have multiple Read Replicas for my master DB Instance and I promote one of them, what happens to the rest of the Read Replicas?

- A. The remaining Read Replicas will still replicate from the older master DB Instance
- B. The remaining Read Replicas will be deleted
- C. The remaining Read Replicas will be combined to one read replica

Answer: A

NEW QUESTION 315

Can I encrypt connections between my application and my DB Instance using SSL?

- A. No
- B. Yes
- C. Only in VPC
- D. Only in certain regions

Answer: B

NEW QUESTION 318

What can I access by visiting the URL: <http://status.aws.amazon.com/>?

- A. Amazon Cloud Watch
- B. Status of the Amazon RDS DB
- C. AWS Service Health Dashboard
- D. AWS Cloud Monitor

Answer: C

NEW QUESTION 319

How are the EBS snapshots saved on Amazon S3?

- A. Exponentially
- B. Incrementally
- C. EBS snapshots are not stored in the Amazon S3
- D. Decrementally

Answer: B

NEW QUESTION 321

The new DB Instance that is created when you promote a Read Replica retains the backup window period.

- A. TRUE
- B. FALSE

Answer: A

NEW QUESTION 323

What is the default maximum number of MFA devices in use per AWS account (at the root account level)?

- A. 1
- B. 5
- C. 15
- D. 10

Answer: A

NEW QUESTION 326

How many Elastic IP by default in Amazon Account?

- A. 1 Elastic IP
- B. 3 Elastic IP
- C. 5 Elastic IP
- D. 0 Elastic IP

Answer: D

NEW QUESTION 331

If an Amazon EBS volume is the root device of an instance, can I detach it without stopping the instance?

- A. Yes but only if Windows instance
- B. No
- C. Yes
- D. Yes but only if a Linux instance

Answer: B

NEW QUESTION 334

Select the correct statement:

- A. You don't need not specify the resource identifier while stopping a resource
- B. You can terminate, stop, or delete a resource based solely on its tags
- C. You can't terminate, stop, or delete a resource based solely on its tags
- D. You don't need to specify the resource identifier while terminating a resource

Answer: C

NEW QUESTION 339

Which AWS instance address has the following characteristics? : " If you stop an instance, its Elastic IP address is unmapped, and you must remap it when you restart the instance."

- A. Both A and B
- B. None of these
- C. VPC Addresses
- D. EC2 Addresses

Answer: A

NEW QUESTION 341

Security groups act like a firewall at the instance level, whereas _ are an additional layer of security that act at the subnet level.

- A. DB Security Groups
- B. VPC Security Groups
- C. network ACLs

Answer: C

NEW QUESTION 345

Which DNS name can only be resolved within Amazon EC2?

- A. Internal DNS name
- B. External DNS name
- C. Global DNS name
- D. Private DNS name

Answer: A

NEW QUESTION 346

If your DB instance runs out of storage space or file system resources, its status will change to _ and your DB Instance will no longer be available.

- A. storage-overflow

- B. storage-full
- C. storage-exceed
- D. storage-overage

Answer: B

NEW QUESTION 351

Is it possible to access your EBS snapshots?

- A. Yes, through the Amazon 53 APIs.
- B. Yes, through the Amazon EC2 APIs.
- C. No, EBS snapshots cannot be accessed; they can only be used to create a new EBS volume.
- D. EBS doesn't provide snapshot

Answer: B

NEW QUESTION 352

Does Amazon RDS for SQL Server currently support importing data into the msdb database'?

- A. No
- B. Yes

Answer: A

NEW QUESTION 357

Does Route 53 support MX Records?

- A. Yes.
- B. It supports CNAME records, but not MX records.
- C. No
- D. Only Primary MX record
- E. Secondary MX records are not supporte

Answer: A

NEW QUESTION 358

Because of the extensibility limitations of striped storage attached to Windows Server, Amazon RDS does not currently support increasing storage on a _ DB Instance.

- A. SQL Server
- B. MySQL
- C. Oracle

Answer: A

NEW QUESTION 360

Which Amazon storage do you think is the best for my database-style applications that frequently encounter many random reads and writes across the dataset?

- A. None of these.
- B. Amazon Instance Storage
- C. Any of these
- D. Amazon EBS

Answer: D

NEW QUESTION 361

Location of Insta nces are -----

- A. Regional
- B. based on Availability Zone
- C. Global

Answer: B

NEW QUESTION 363

Does Dynamic DB support in-place atomic updates?

- A. It is not defined
- B. No
- C. Yes
- D. It does support in-place non-atomic updates

Answer: C

NEW QUESTION 367

Is there a method in the IAM system to allow or deny access to a specific instance?

- A. Only for VPC based instances
- B. Yes
- C. No

Answer: C

NEW QUESTION 372

REST or Query requests are HTTP or HTTPS requests that use an HTTP verb (such as GET or POST) and a parameter named Action or Operation that specifies the API you are calling.

- A. FALSE
- B. TRUE

Answer: A

NEW QUESTION 377

Do the system resources on the Micro instance meet the recommended configuration for Oracle?

- A. Yes completely
- B. Yes but only for certain situations
- C. Not in any circumstance

Answer: B

NEW QUESTION 380

True or False: When you add a rule to a DB security group, you do not need to specify port number or protocol.

- A. Depends on the OS used
- B. TRUE
- C. FALSE

Answer: B

NEW QUESTION 385

Can I initiate a "forced failover" for my Oracle Multi-AZ DB Instance deployment?

- A. Yes
- B. Only in certain regions
- C. Only in VPC
- D. No

Answer: A

NEW QUESTION 390

Without IAM you must either create multiple AWS accounts-each with its own billing and subscriptions to AWS products-or your employees must share the security credentials of a single AWS account.

- A. Amazon RDS
- B. Amazon Glacier
- C. Amazon EMR
- D. Amazon IAM

Answer: D

NEW QUESTION 392

Amazon RDS supports SOAP only through __ __

- A. HTTP or HTTPS
- B. TCP/IP
- C. HTTP
- D. HTTPS

Answer: D

NEW QUESTION 394

What is the name of the licensing model in which I can use your existing Oracle Database licenses to run Oracle deployments on Amazon RDS?

- A. Bring Your Own License
- B. Role Based License
- C. Enterprise License
- D. License Included

Answer: A

NEW QUESTION 395

Does Amazon Route 53 support NS Records?

- A. Yes, it supports Name Service records.
- B. No
- C. It supports only MX records.
- D. Yes, it supports Name Sewer record

Answer: D

NEW QUESTION 397

If I scale the storage capacity provisioned to my DB Instance by mid of a billing month, how will I be charged?

- A. You will be charged for the highest storage capacity you have used
- B. On a proration basis
- C. You will be charged for the lowest storage capacity you have used

Answer: B

NEW QUESTION 400

Will I be alerted when automatic fail over occurs?

- A. Only if SNS configured
- B. No
- C. Yes
- D. Only if Cloudwatch configured

Answer: C

NEW QUESTION 404

If you're unable to connect via SSH to your EC2 instance, which of the following should you check and possibly correct to restore connectivity?

- A. Adjust Security Group to permit egress traffic over TCP port 443 from your IP.
- B. Configure the IAM role to permit changes to security group settings.
- C. Modify the instance security group to allow ingress of ICMP packets from your IP.
- D. Adjust the instance's Security Group to permit ingress traffic over port 22 from your IP.
- E. Apply the most recently released Operating System security patches

Answer: D

Explanation:

<http://docs.aws.amazon.com/cli/latest/reference/ec2/authorize-security-group-ingress.html>

NEW QUESTION 408

You are building a solution for a customer to extend their on-premises data center to AWS. The customer requires a 50-Mbps dedicated and private connection to their VPC. Which AWS product or feature satisfies this requirement?

- A. Amazon VPC peering
- B. Elastic IP Addresses
- C. AWS Direct Connect
- D. Amazon VPC virtual private gateway

Answer: C

NEW QUESTION 411

You have a video transcoding application running on Amazon EC2. Each instance polls a queue to find out which video should be transcoded, and then runs a transcoding process. If this process is interrupted, the video will be transcoded by another instance based on the queuing system. You have a large backlog of videos which need to be transcoded and would like to reduce this backlog by adding more instances. You will need these instances only until the backlog is reduced. Which type of Amazon EC2 instances should you use to reduce the backlog in the most cost efficient way?

- A. Reserved instances
- B. Spot instances
- C. Dedicated instances
- D. On-demand instances

Answer: B

Explanation:

Reference: <http://aws.amazon.com/ec2/purchasing-options/spot-instances/>

NEW QUESTION 413

Your application provides data transformation services. Files containing data to be transformed are first uploaded to Amazon S3 and then transformed by a fleet of spot EC2 instances. Files submitted by your premium customers must be transformed with the highest priority. How should you implement such a system?

- A. Use a DynamoDB table with an attribute defining the priority leve
- B. Transformation instances will scan the table for tasks, sorting the results by priority level.
- C. Use Route 53 latency based-routing to send high priority tasks to the closest transformation instances.
- D. Use two SQS queues, one for high priority messages, the other for default priorit
- E. Transformation instances first poll the high priority queue; if there is no message, they poll the default priority queue.
- F. Use a single SQS queu
- G. Each message contains the priority leve
- H. Transformation instances pollhigh-priority messages firs

Answer: C

NEW QUESTION 418

You have decided to change the instance type for instances running in your application tier that is using Auto Scaling. In which area below would you change the instance type definition?

- A. Auto Scaling policy
- B. Auto Scaling group
- C. Auto Scaling tags
- D. Auto Scaling launch configuration

Answer: D

NEW QUESTION 422

What is one key difference between an Amazon EBS-backed and an instance-store backed instance?

- A. Amazon EBS-backed instances can be stopped and restarted.
- B. Instance-store backed instances can be stopped and restarted.
- C. Auto scaling requires using Amazon EBS-backed instances.
- D. Virtual Private Cloud requires EBS backed instance

Answer: A

Explanation:

Reference:

[http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ComponentsAIV|is.html#storage-for-theroot-devi ce](http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ComponentsAIV|is.html#storage-for-theroot-devi-ce)

NEW QUESTION 425

You launch an Amazon EC2 instance without an assigned AVVS identity and Access Management (IAM) role. Later, you decide that the instance should be running with an IAM role. Which action must you take in order to have a running Amazon EC2 instance with an IAM role assigned to it?

- A. Create an image of the instance, and register the image with an IAM role assigned and an Amazon EBS volume mapping.
- B. Create a new IAM role with the same permissions as an existing IAM role, and assign it to the running instance.
- C. Create an image of the instance, add a new IAM role with the same permissions as the desired IAM role, and deregister the image with the new role assigned.
- D. Create an image of the instance, and use this image to launch a new instance with the desired Lam role assigned.

Answer: D

Explanation:

Reference:<http://docs.aws.amazon.com/IAM/latest/UserGuide/roles-usingrole-ec2instanee.html>

NEW QUESTION 430

How can the domain's zone apex, for example, "myzoneapexdomain.com", be pointed towards an Elastic Load Balancer?

- A. By using an Amazon Route 53 Alias record
- B. By using an AAAA record
- C. By using an Amazon Route 53 CNAME record
- D. By using an A record

Answer: A

NEW QUESTION 434

How can you secure data at rest on an EBS volume?

- A. Attach the volume to an instance using EC2's SSL interface.
- B. Write the data randomly instead of sequentially.
- C. Encrypt the volume using the 53 server-side encryption service.
- D. Create an IAM policy that restricts read and write access to the volume.
- E. Use an encrypted file system on top of the EBS volum

Answer: E

Explanation:

Reference: <https://aws.amazon.com/blogs/aws/protect-your-data-with-new-ebs-encryption/>

NEW QUESTION 435

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your AWS-Solution-Architect-Associate Exam with Our Prep Materials Via below:

<https://www.certleader.com/AWS-Solution-Architect-Associate-dumps.html>