

az-500 Dumps

Microsoft Azure Security Technologies

<https://www.certleader.com/az-500-dumps.html>



NEW QUESTION 1

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Subscription named Sub1.

You have an Azure Storage account named Sa1 in a resource group named RG1.

Users and applications access the blob service and the file service in Sa1 by using several shared access signatures (SASs) and stored access policies. You discover that unauthorized users accessed both the file service and the blob service.

You need to revoke all access to Sa1.

Solution: You create a new stored access policy. Does this meet the goal?

A. Yes

B. No

Answer: A

Explanation:

To revoke a stored access policy, you can either delete it, or rename it by changing the signed identifier. Changing the signed identifier breaks the associations between any existing signatures and the stored access policy. Deleting or renaming the stored access policy immediately effects all of the shared access signatures associated with it.

References:

<https://docs.microsoft.com/en-us/rest/api/storageservices/Establishing-a-Stored-Access-Policy>

NEW QUESTION 2

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (AzureAD). You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials. You need to configure the environment to support the planned authentication.

Solution: You deploy the On-premises data gateway to the on-premises network. Does this meet the goal?

A. Yes

B. No

Answer: B

Explanation:

Instead, you connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

- Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions: Create Azure Virtual Network.

- Create a custom DNS server in the Azure Virtual Network.

- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver. Configure forwarding between the custom DNS server and your on-premises DNS server.

References:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

NEW QUESTION 3

Your network contains an Active Directory forest named contoso.com. The forest contains a single domain.

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com. You plan to deploy Azure AD Connect and to integrate Active Directory and the Azure AD tenant.

You need to recommend an integration solution that meets the following requirements:

- Ensures that password policies and user logon restrictions apply to user accounts that are synced to the tenant
- Minimizes the number of servers required for the solution.

Which authentication method should you include in the recommendation?

A. federated identity with Active Directory Federation Services (AD FS)

B. password hash synchronization with seamless single sign-on (SSO)

C. pass-through authentication with seamless single sign-on (SSO)

Answer: B

Explanation:

Password hash synchronization requires the least effort regarding deployment, maintenance, and infrastructure. This level of effort typically applies to organizations that only need their users to sign in to Office 365, SaaS apps, and other Azure AD-based resources. When turned on, password hash synchronization is part of the Azure AD Connect sync process and runs every two minutes.

Incorrect Answers:

A: A federated authentication system relies on an external trusted system to authenticate users. Some companies want to reuse their existing federated system investment with their Azure AD hybrid identity solution. The maintenance and management of the federated system falls outside the control of Azure AD. It's up to the organization by using the federated system to make sure it's deployed securely and can handle the authentication load.

C: For pass-through authentication, you need one or more (we recommend three) lightweight agents installed on existing servers. These agents must have access to your on-premises Active Directory Domain Services, including your on-premises AD domain controllers. They need outbound access to the Internet and access to your domain controllers. For this reason, it's not supported to deploy the agents in a perimeter network.

Pass-through Authentication requires unconstrained network access to domain controllers. All network traffic is encrypted and limited to authentication requests.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/hybrid/how-to-connect-pta>

NEW QUESTION 4**HOTSPOT**

You have an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Role	Sign in frequency
User1	Password administrator	Sign in every work day
User2	Password administrator	Sign in bi-weekly
User3	Global administrator, Password administrator	Signs in every month

You configure an access review named Review1 as shown in the following exhibit.

Create an access review

Access reviews enable reviewers to attest to users access.

* Review name:

Description:

* Start date:

Frequency:

Duration (in days):

End:

* Number of times:

* End date:

Users

Scope: ☒ Everyone

* Review role membership:

Reviewers

Reviewers:

^ Upon completion settings

Auto apply results to resource:

Should reviewer not respond:

^ Advanced settings

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User3 can perform Review1 for

If User2 fails to complete Review1 by March 20, 2019

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: User3 only

Use the Members (self) option to have the users review their own role assignments.

Box 2: User3 will receive a confirmation request

Use the Should reviewer not respond list to specify what happens for users that are not reviewed by the reviewer within the review period. This setting does not impact users who have been reviewed by the reviewers manually. If the final reviewer's decision is Deny, then the user's access will be removed.

No change - Leave user's access unchanged Remove access - Remove user's access Approve access - Approve user's access

Take recommendations - Take the system's recommendation on denying or approving the user's continued access

References:

<https://docs.microsoft.com/bs-latn-ba/azure/active-directory/privileged-identity-management/pim-how-to-start-security-review>

NEW QUESTION 5

HOTSPOT

Your company has two offices in Seattle and New York. Each office connects to the Internet by using a NAT device. The offices use the IP addresses shown in the following table.

Location	IP address space	Public NAT segment
Seattle	10.10.0.0/16	190.15.1.0/24
New York	172.16.0.0/16	194.25.2.0/24

The company has an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Multi-factor authentication (MFA) status
User1	Enabled
User2	Enforced

The MFA service settings are configured as shown in the exhibit. (Click the Exhibit tab.)

trusted ips [\(learn more\)](#)

☒ Skip multi-factor authentication for requests from federated users on my intranet

Skip multi-factor authentication for requests from following range of IP address subnets

10.10.0.0/16
194.25.2.0/24

verification options [\(learn more\)](#)

Methods available to users:

☒ Call to phone

☒ Text message to phone

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Yes

No

If User1 signs in to Azure from a device that uses an IP address of 134.18.14.10, User1 must be authenticated by using a phone.

☐
☐

If User2 signs in to Azure from a device in the Seattle office, User2 must be authenticated by using the Microsoft Authenticator app.

☐
☐

If User2 signs in to Azure from a device in the New York office, User1 must be authenticated by using a phone

☐
☐

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Box 2: No

Use of Microsoft Authenticator is not required.

Note: Microsoft Authenticator is a multifactor app for mobile devices that generates time-based codes used during the Two-Step Verification process. Box 3: No

The New York IP address subnet is included in the "skip multi-factor authentication for request.

References:

<https://www.cayosoft.com/difference-enabling-enforcing-mfa/>

NEW QUESTION 6

HOTSPOT

You have an Azure Container Registry named Registry1.

You add role assignment for Registry1 as shown in the following table.

User	Role
User1	AcrPush
User2	AcrPull
User3	AcrImageSigner
User4	Contributor

Which users can upload images to Registry1 and download images from Registry1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Upload images:

▼
User1 only
User1 and User4 only
User1, User3, and User4
User1, User2, User3, and User4

Download images:

▼
User2 only
User1 and User2 only
User2 ad User4 only
User1, User2, and User4
User1, User2, User3, and User4

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: User1 and User4 only

Owner, Contributor and AcrPush can push images.

Box 2: User1, User2, and User4

All, except AcrImagineSigner, can download/pull images.

Role/Permission	Access Resource Manager	Create/delete registry	Push image	Pull image	Delete image data	Change policies	Sign images
Owner	X	X	X	X	X	X	
Contributor	X	X	X	X	X	X	
Reader	X			X			
AcrPush			X	X			
AcrPull				X			
AcrDelete					X		
AcrImageSigner							X

References:

<https://docs.microsoft.com/bs-latn-ba/azure/container-registry/container-registry-roles>

NEW QUESTION 7

HOTSPOT

You are evaluating the security of the network communication between the virtual machines in Sub2. For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From VM1, you can successfully ping the public IP address of VM2.	<input type="radio"/>	<input type="radio"/>
From VM1, you can successfully ping the private IP address of VM3.	<input type="radio"/>	<input type="radio"/>
From VM1, you can successfully ping the public IP address of VM5.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

Box 2: Yes

Box 3: No Note:

Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet1.1
VM2	NIC2	ASG2	Subnet1.1
VM3	NIC3	None	Subnet1.2
VM4	NIC4	ASG1	Subnet1.3
VM5	NIC5	None	Subnet2.1

Name	Subnet
VNetwork1	Subnet1.1, Subnet1.2 and Subent1.3
VNetwork2	Subnet2.1

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet1.1
NSG3	Subnet1.3
NSG4	Subnet2.1

Question Set 3

NEW QUESTION 8

HOTSPOT

You have an Azure subscription named Sub1.

You create a virtual network that contains one subnet. On the subnet, you provision the virtual machines shown in the following table.

Name	Network interface	Application security group assignment	IP address
VM1	NIC1	AppGroup12	10.0.0.10
VM2	NIC2	AppGroup12	10.0.0.11
VM3	NIC3	AppGroup3	10.0.0.100
VM4	NIC4	AppGroup4	10.0.0.200

Currently, you have not provisioned any network security groups (NSGs). You need to implement network security to meet the following requirements:

- _ Allow traffic to VM4 from VM3 only.
- _ Allow traffic from the Internet to VM1 and VM2 only. Minimize the number of NSGs and network security rules.

How many NSGs and network security rules should you create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

NSGs:

	▼
1	
2	
3	
4	

Network security rules:

	▼
1	
2	
3	
4	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

NSGs: 2

Network security rules: 3

Not 2: You cannot specify multiple service tags or application groups) in a security rule.

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

NEW QUESTION 9

HOTSPOT

You have two Azure virtual machines in the East US2 region as shown in the following table.

Name	Operating system	Type	Tier
VM1	Windows Server 2008 R2	A3	Basic
VM2	Ubuntu 16.04-DAILY-LTS	L4s	Standard

You deploy and configure an Azure Key vault.

You need to ensure that you can enable Azure Disk Encryption on VM1 and VM2.

What should you modify on each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VM1:

	▼
The operating system version	
The tier	
The type	

VM2:

	▼
The operating system version	
The tier	
The type	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

VM1: The Tier

The Tier needs to be upgraded to standard.

Disk Encryption for Windows and Linux IaaS VMs is in General Availability in all Azure public regions and Azure Government regions for Standard VMs and VMs with Azure Premium Storage.

VM2: The type

Need to change the VMtype to any of A, D, DS, G, GS, F, and so on, series IaaS VMs.

Not the operating system version: Ubuntu 16.04 is supported. References:

<https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-overview>

https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-faq#bkmk_LinuxOSSupport

NEW QUESTION 10

HOTSPOT

You suspect that users are attempting to sign in to resources to which they have no access.

You need to create an Azure Log Analytics query to identify failed user sign-in attempts from the last three days. The results must only show users who had more than five failed sign-in attempts.

How should you configure the query? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
let timeframe = 3d;
SecurityEvent
| where TimeGenerated > ago(3d)
| where AccountType == 'User' and
```

	▼
ActivityID	
DataType	
EventID	
QuantityUnit	

==4625

```
| Summarize failed_login_attempts=
```

	▼
Count(),	
Countif(),	
Makeset(),	
Split(),	

```
latest_failed_login=arg_max(TimeGenerated by Account
| where failed_login_attempts > 5
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

The following example identifies user accounts that failed to log in more than five times in the last day, and when they last attempted to log in. let timeframe = 1d;
SecurityEvent
| where TimeGenerated > ago(1d)
| where AccountType == 'User' and EventID == 4625 // 4625 - failed log in
| summarize failed_login_attempts=count(), latest_failed_login=arg_max(TimeGenerated, Account) by Account
| where failed_login_attempts > 5
| project-away Account1
References:
<https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/examples>

NEW QUESTION 10

DRAG DROP

You have an Azure subscription that contains 100 virtual machines. Azure Diagnostics is enabled on all the virtual machines. You are planning the monitoring of Azure services in the subscription.

You need to retrieve the following details:

- _ Identify the user who deleted a virtual machine three weeks ago.
- _ Query the security events of a virtual machine that runs Windows Server 2016.

What should you use in Azure Monitor? To answer, drag the appropriate configuration settings to the correct details. Each configuration setting may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Settings	Answer Area
Activity log	
Logs	Identify the user who deleted a virtual machine three weeks ago: <input type="text"/>
Metrics	Query the security events of a virtual machine that runs Windows Server 2016: <input type="text"/>
Service Health	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box1: Activity log

Azure activity logs provide insight into the operations that were performed on resources in your subscription. Activity logs were previously known as “audit logs” or “operational logs,” because they report control-plane events for your subscriptions.

Activity logs help you determine the “what, who, and when” for write operations (that is, PUT, POST, or DELETE). Box 2: Logs

Log Integration collects Azure diagnostics from your Windows virtual machines, Azure activity logs, Azure Security Center alerts, and Azure resource provider logs. This integration provides a unified dashboard for all your assets, whether they're on-premises or in the cloud, so that you can aggregate, correlate, analyze, and alert for security events.

References:

<https://docs.microsoft.com/en-us/azure/security/azure-log-audit>

Testlet 1

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other question on this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next sections of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question on this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://litwareinc.com and http://www.litwareinc.com .
Resource Group1	Resource group	Resource Group1 is a resource group that contains VNet1, VM0, and VM1.
Resource Group2	Resource group	Resource Group2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Free tier.

Planned changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Litware identifies the following identity and access requirements:

- _ All San Francisco users and their devices must be members of Group1.
- _ The members of Group2 must be assigned the Contributor role to Resource Group2 by using a permanent eligible assignment.
- _ Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- _ Microsoft Antimalware must be installed on the virtual machines in Resource Group1.
- _ The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role. Azure AD users must be to authenticate to AKS1 by using their Azure AD credentials.
- _ Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- _ A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in Resource Group1. Role1 must be available only for Resource Group1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

NEW QUESTION 11

DRAG DROP

Your company has an Azure Active Directory (Azure AD) tenant named contoso.com.

The company is developing an application named App1. App1 will run as a service on server that runs Windows Server 2016. App1 will authenticate to contoso.com and access Microsoft Graph to read directory data.

You need to delegate the minimum required permissions to App1.

Which three actions should you perform in sequence from the Azure portal? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Grant permissions	
Add a delegated permission.	
Configure Azure AD Application Proxy.	
Add an application permission.	
Create an app registration.	

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Step 1: Create an app registration

First the application must be created/registered.

Step 2: Add an application permission

Application permissions are used by apps that run without a signed-in user present.

Step 3: Grant permissions

Incorrect Answers: Delegated permission

Delegated permissions are used by apps that have a signed-in user present.

Application Proxy:

Azure Active Directory's Application Proxy provides secure remote access to on-premises web applications.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/v2-permissions-and-consent>

NEW QUESTION 13

HOTSPOT

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com. You plan to implement an application that will consist of the resources shown in the following table.

Name	Type	Description
CosmosDBAccount1	Azure Cosmos DB account	A Cosmos DB account containing a database Named CosmosDB1 that serves as a back-end tier of the application
WebApp1	Azure web app	A web app configured to serve as the middle tier of the application

Users will authenticate by using their Azure AD user account and access the Cosmos DB account by using resource tokens. You need to identify which tasks will be implemented in CosmosDB1 and WebApp1.

Which task should you identify for each resource? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

CosmosDB1:	<div>▼</div> <div> Authenticate Azure AD users and generate resource tokens. Authenticate Azure AD users and relay resource tokens. Create database users and generate resource tokens. </div>
WebApp1:	<div>▼</div> <div> Authenticate Azure AD users and generate resource tokens. Authenticate Azure AD users and relay resource tokens. Create database users and generate resource tokens. </div>

- A. Mastered
B. Not Mastered

Answer: A


Explanation:

CosmosDB1: Create database users and generate resource tokens.

Azure Cosmos DB resource tokens provide a safe mechanism for allowing clients to read, write, and delete specific resources in an Azure Cosmos DB account according to the granted permissions.

WebApp1: Authenticate Azure AD users and relay resource tokens

A typical approach to requesting, generating, and delivering resource tokens to a mobile application is to use a resource token broker. The following diagram shows a high-level overview of how the sample application uses a resource token broker to manage access to the document database data:

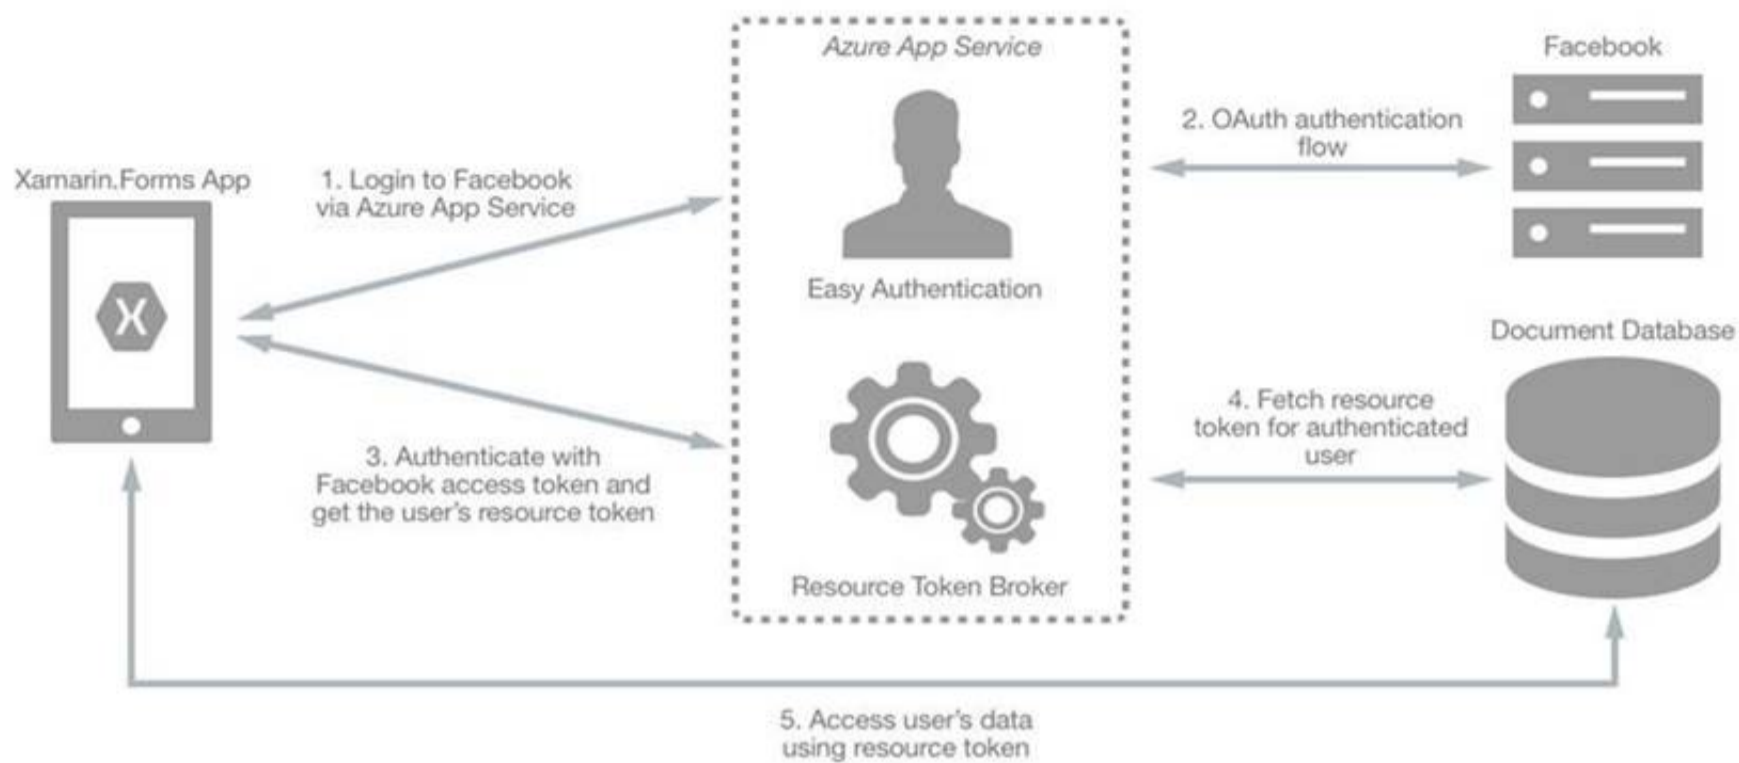

References:

<https://docs.microsoft.com/en-us/xamarin/xamarin-forms/data-cloud/cosmosdb/authentication>

NEW QUESTION 15

Your company uses Azure DevOps.

You need to recommend a method to validate whether the code meets the company's quality standards and code review standards. What should you recommend implementing in Azure DevOps?

- A. branch folders
- B. branch permissions
- C. branch policies
- D. branch locking

Answer: C

Explanation:

Branch policies help teams protect their important branches of development. Policies enforce your team's code quality and change management standards.

References:

<https://docs.microsoft.com/en-us/azure/devops/repos/git/branch-policies?view=azure-devops&viewFallbackFrom=vsts>

NEW QUESTION 19

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your az-500 Exam with Our Prep Materials Via below:

<https://www.certleader.com/az-500-dumps.html>