

Cisco


Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)




NEW QUESTION 1


An engineer is implementing a Cisco ACI data center network that includes Cisco Nexus 2000 Series 10G fabric extenders. Which physical topology is supported?
A.

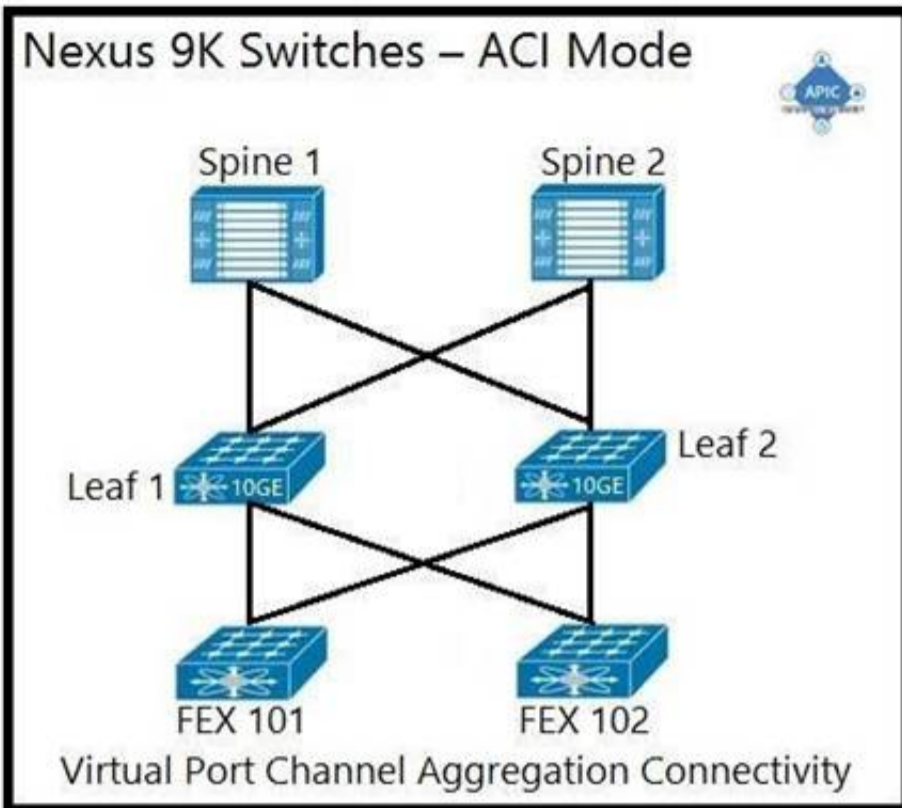


B.

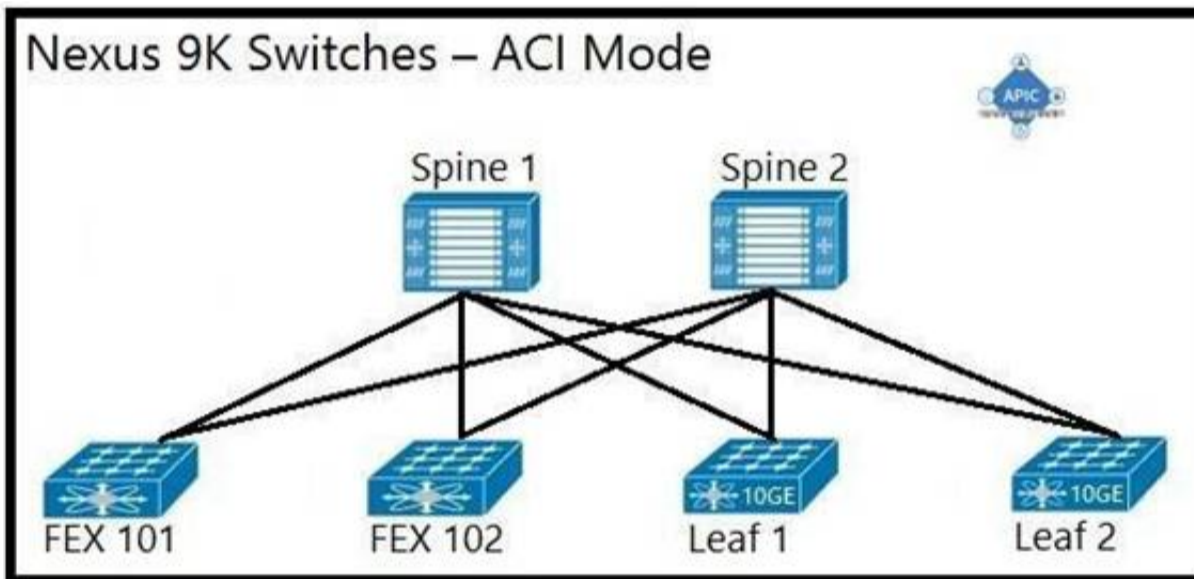

C.

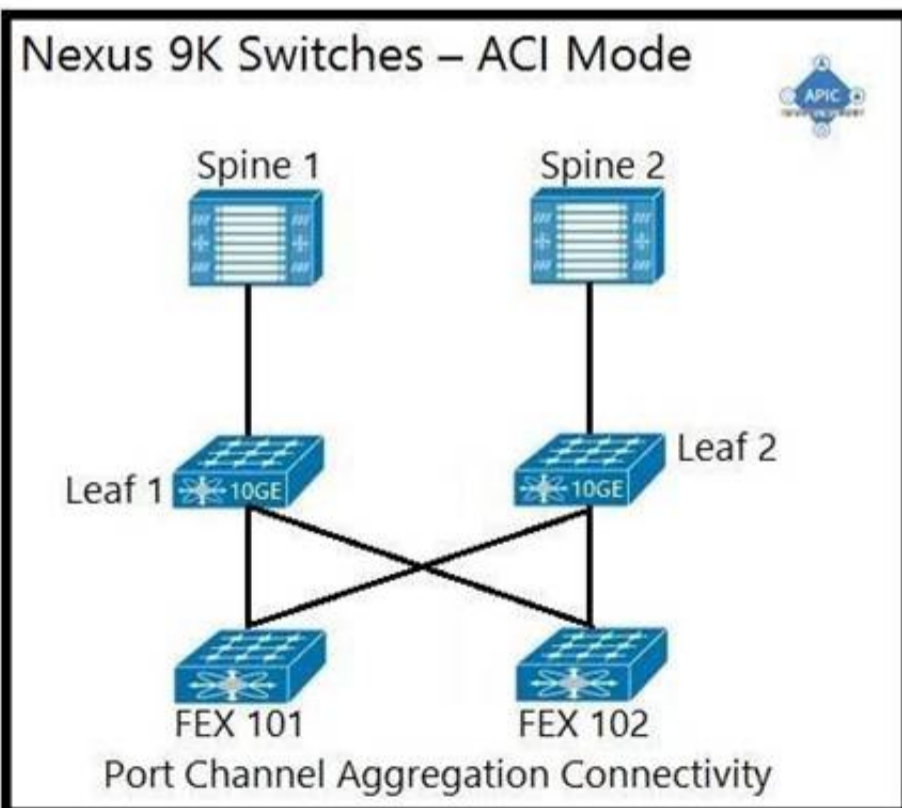

A.

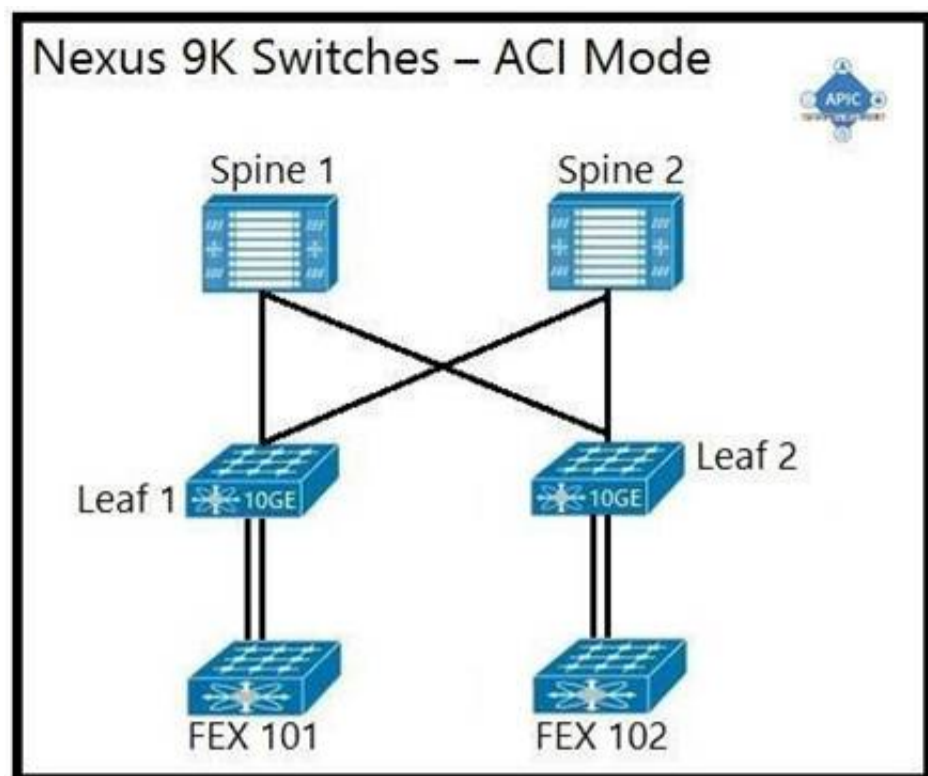

Answer: D

NEW QUESTION 2

Which type of profile needs to be created to deploy an access port policy group?

- A. attachable entity
- B. Pod
- C. module
- D. leaf interface

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0110.html

NEW QUESTION 3

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 4

How is an EPG extended outside of the ACI fabric?

- A. Create an external bridged network that is assigned to a leaf port.
- B. Create an external routed network that is assigned to an EPG.
- C. Enable unicast routing within an EPG.
- D. Statically assign a VLAN ID to a leaf port in an EPG.

Answer: D

Explanation:

Reference: <https://www.dcllessons.com/l2-external-network-with-aci>

NEW QUESTION 5

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 6

What does a bridge domain represent?

- A. Layer 3 cloud
- B. Layer 2 forwarding construct
- C. tenant
- D. physical domain

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 7

Which table holds IP address, MAC address and VXLAN/VLAN information on a Cisco ACI leaf?

- A. endpoint
- B. adjacency
- C. RIB
- D. ARP

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 8

Which two types of interfaces are supported on border leaf switches to connect to an external router? (Choose two.)

- A. subinterface with VXLAN tagging
- B. subinterface with 802.1Q tagging
- C. FEX host interface
- D. out of band interface
- E. Switch Virtual Interface

Answer: BE

NEW QUESTION 9

Which setting prevents the learning of Endpoint IP addresses whose subnet does not match the bridge domain subnet?

- A. "Limit IP learning to network" setting within the bridge domain.
- B. "Limit IP learning to subnet" setting within the EPG.
- C. "Limit IP learning to network" setting within the EPG.
- D. "Limit IP learning to subnet" setting within the bridge domain.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 10

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 10

Refer to the exhibit.

```
<fvTenant name="ACILab">
  <fvCtx name="pvn1"/>
  <fvBD name="bd1">
    <fvRsCtx tnFvCtxName="pvn1"/>
    <fvSubnet ip="10.1.100.1/24"/>
  </fvBD>
</fvTenant>
```

Which two objects are created as a result of the configuration? (Choose two.)

- A. application profile
- B. attachable AEP
- C. bridge domain
- D. endpoint group
- E. VRF

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01110.html

NEW QUESTION 12

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 13

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

Answer: AB

NEW QUESTION 18

Which two actions extend a Layer 2 domain beyond the ACI fabric? (Choose two.)

- A. extending the routed domain out of the ACI fabric
- B. creating a single homed Layer 3 Out
- C. creating an external physical network
- D. extending the bridge domain out of the ACI fabric
- E. extending the EPG out of the ACI fabric

Answer: AE

NEW QUESTION 22

On which two interface types should a user configure storm control to protect against broadcast traffic? (Choose two.)

- A. APIC facing interfaces
- B. port channel on a single leaf switch
- C. all interfaces on the leaf switches in the fabric
- D. endpoint-facing trunk interface
- E. fabric uplink interfaces on the leaf switches

Answer: BD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_01010.html

NEW QUESTION 27

What must be configured to redistribute externally learned OSPF routes within the ACI fabric?

- A. Route Control Profile
- B. BGP Route Reflector
- C. BGP Inter-leak Route Map
- D. PIM Sparse Mode

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 30

When configuring Cisco ACI VMM domain integration with VMware vCenter, which object is created in vCenter?

- A. datacenter
- B. VMware vSphere Standard vSwitch
- C. VMware vSphere Distributed Switch
- D. cluster

Answer: C

NEW QUESTION 35

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborship has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.
- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborship.
- D. No policies are downloaded because there is no discovery protocol neighborship.

Answer: C

NEW QUESTION 39

In the context of VMM, which protocol between ACI leaf and compute hosts ensures that the policies are pushed to the leaf switches for immediate and on demand resolution immediacy?

- A. VXLAN
- B. LLDP
- C. ISIS
- D. STP

Answer: A

Explanation:

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_0101.html

NEW QUESTION 43

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D

NEW QUESTION 47

Which new construct must a user create when configuring in-band management?

- A. VLAN pool
- B. management contract
- C. management tenant
- D. bridge domain

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html

NEW QUESTION 51

A data center administrator is upgrading an ACI fabric. There are 3 APIC controllers in the fabric and all the servers are dual-homed to pairs of leaf switches configured in VPC mode. How should the fabric be upgraded to minimize possible traffic impact during the upgrade?

- A. * 1. Create two maintenance groups for the APIC controllers: VPC left and VPC right.* 2. Upgrade the first group of controllers.* 3. Upgrade the second group of controllers.* 4. Upgrade the leaf switches.
- B. * 1. Create two maintenance groups for APIC controllers: VPC left and VPC right.* 2. Upgrade the leaf switches.* 3. Upgrade the first group of controllers.* 4. Upgrade the second group of controllers.
- C. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the APIC controllers.* 3. Upgrade the first group of leaf switches.* 4. Upgrade the second group of leaf switches.

D. * 1. Create two maintenance groups for the leaf switches: VPC left and VPC right.* 2. Upgrade the first group of switches.* 3. Upgrade the second group of switches.* 4. Upgrade the APIC controllers.

Answer: D

NEW QUESTION 52

Which protocol does ACI use to securely sane the configuration in a remote location?

- A. SCP
- B. HTTPS
- C. TFTP
- D. FTP

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Using_Import_Export_to_Recover_Config_States.html

NEW QUESTION 56

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 57

Which two statements regarding ACI Multi-Site are true? (Choose two.)

- A. The Multi-Site orchestrator must be directly attached to one ACI leaf.
- B. Routers in the Inter-Site network must run OSPF, DHCP relay, and MP-BGP.
- C. ACI Multi-Site is a solution that supports a dedicated APIC cluster per site.
- D. ACI Multi-Site is a solution that allows one APIC cluster to manage multiple ACI sites.
- E. The Inter-Site network routers should run OSPF to establish peering with the spines.

Answer: AE

NEW QUESTION 62

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 63

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)