

Cisco

Exam Questions 300-730

Implementing Secure Solutions with Virtual Private Networks (SVPN)



NEW QUESTION 1

Refer to the exhibit.

```
interface: Tunnell
  Crypto map tag: Tunnell-head-0, local addr 192.168.0.1

protected vrf: (none)
local ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
remote ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
current_peer 192.168.0.2 port 500
  PERMIT, flags={origin_is_acl,}
  #pkts encaps: 0, #pkts encrypt: 0, #pkts digest: 0
  #pkts decaps: 0, #pkts decrypt: 0, #pkts verify: 0
  #pkts compressed: 0, #pkts decompressed: 0
  #pkts not compressed: 0, #pkts compr. failed: 0
  #pkts not decompressed: 0, #pkts decompress failed: 0
  #send errors 0, #recv errors 0

local crypto endpt.: 192.168.0.1, remote crypto endpt.: 192.168.0.2
plaintext mtu 1438, path mtu 1500, ip mtu 1500, ip mtu idb GigabitEthernet1
current outbound spi: 0x3D05D003(1023791107)
PFS (Y/N): N, DH group: none
```

Which two tunnel types produce the show crypto ipsec sa output seen in the exhibit? (Choose two.)

- A. crypto map
- B. DMVPN
- C. GRE
- D. FlexVPN
- E. VTI

Answer: BE

NEW QUESTION 2

Which two changes must be made in order to migrate from DMVPN Phase 2 to Phase 3 when EIGRP is configured? (Choose two.)

- A. Add NHRP shortcuts on the hub.
- B. Add NHRP redirects on the spoke.
- C. Disable EIGRP next-hop-self on the hub.
- D. Enable EIGRP next-hop-self on the hub.
- E. Add NHRP redirects on the hub.

Answer: CE

NEW QUESTION 3

Which command identifies a Cisco AnyConnect profile that was uploaded to the flash of an IOS router?

- A. svc import profile SSL_profile flash:simos-profile.xml
- B. anyconnect profile SSL_profile flash:simos-profile.xml
- C. crypto vpn anyconnect profile SSL_profile flash:simos-profile.xml
- D. webvpn import profile SSL_profile flash:simos-profile.xml

Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security/anyconnect-secure-mobility-client/200533-AnyConnect-Configure-Basic-SSLVPN-for-I.html>

NEW QUESTION 4

Which configuration construct must be used in a FlexVPN tunnel?

- A. EAP configuration
- B. multipoint GRE tunnel interface
- C. IKEv1 policy
- D. IKEv2 profile

Answer: D

NEW QUESTION 5

Which two features provide headend resiliency for Cisco AnyConnect clients? (Choose two.)

- A. AnyConnect Auto Reconnect
- B. AnyConnect Network Access Manager
- C. AnyConnect Backup Servers
- D. ASA failover
- E. AnyConnect Always On

Answer: CD

NEW QUESTION 6

Cisco AnyConnect Secure Mobility Client has been configured to use IKEv2 for one group of users and SSL for another group. When the administrator configures a new AnyConnect release on the Cisco ASA, the IKEv2 users cannot download it automatically when they connect. What might be the problem?

- A. The XML profile is not configured correctly for the affected users.
- B. The new client image does not use the same major release as the current one.
- C. Client services are not enabled.
- D. Client software updates are not supported with IKEv2.

Answer: C

NEW QUESTION 7


Under which section must a bookmark or URL list be configured on a Cisco ASA to be available for clientless SSLVPN users?

- A. tunnel-group (general-attributes)
- B. tunnel-group (webvpn-attributes)
- C. webvpn (group-policy)
- D. webvpn (global configuration)

Answer: D

NEW QUESTION 8

Refer to the exhibit.

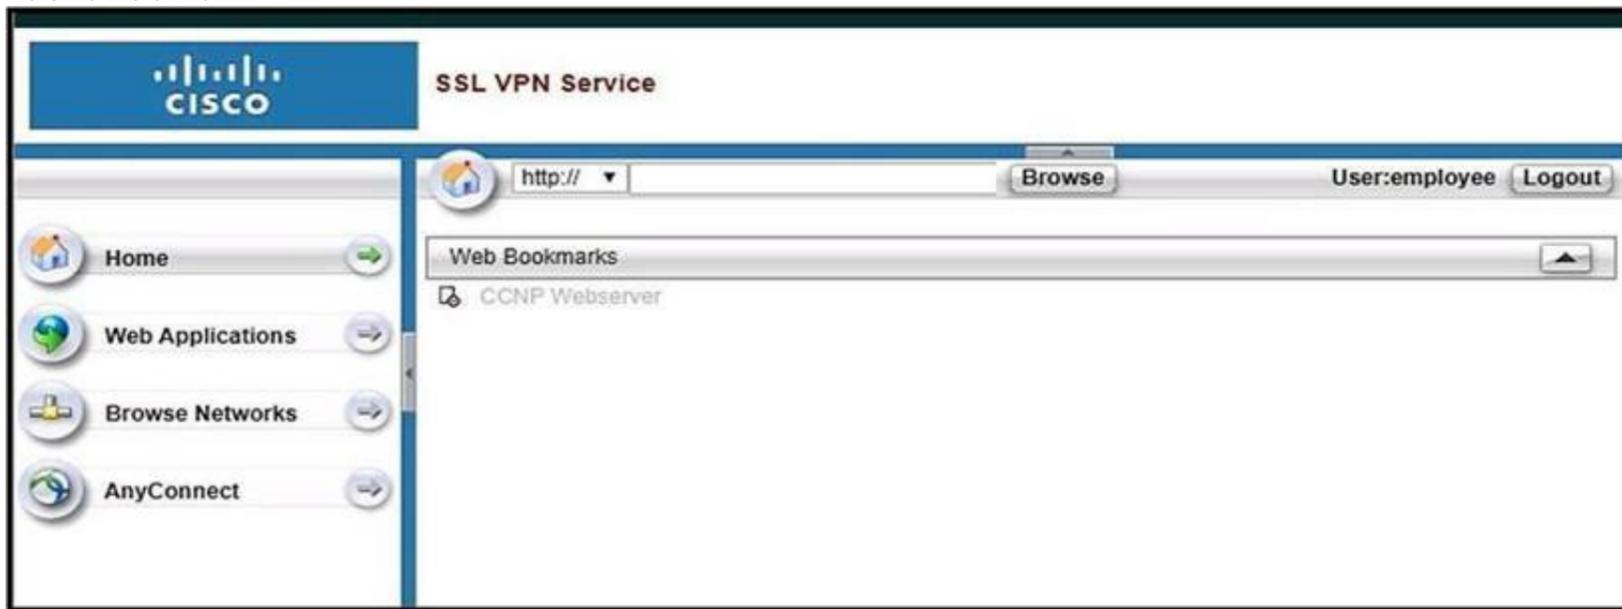

Based on the exhibit, why are users unable to access CCNP Webservers bookmark?

- A. The URL is being blocked by a WebACL.
- B. The ASA cannot resolve the URL.
- C. The bookmark has been disabled.
- D. The user cannot access the URL.

Answer: C

NEW QUESTION 9

Which feature allows the ASA to handle nonstandard applications and web resources so that they display correctly over a clientless SSL VPN connection?

- A. single sign-on
- B. Smart Tunnel
- C. WebType ACL
- D. plug-ins

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/security/asa/asa90/configuration/guide/asa_90_cli_config/vpn_clientless_ssl.html#29951

NEW QUESTION 10

Refer to the exhibit.



The customer must launch Cisco AnyConnect in the RDP machine. Which IOS configuration accomplishes this task?

- A. `crypto vpn anyconnect profile Profile 1 flash:RDP.xml`
`webvpn context Context1`
`svc platform win seq 1`
`policy group PolicyGroup1`
`functions svc-enabled`
- B. `crypto vpn anyconnect profile Profile 1 flash:RDP.xml`
`webvpn context Context1`
`browser-attribute import flash:RDP.xml`
- C. `crypto vpn anyconnect profile Profile 1 flash:RDP.xml`
`webvpn context Context1`
`policy group PolicyGroup1`
`svc profile Profile1`
- D. `crypto vpn anyconnect profile Profile 1 flash:RDP.xml`
`webvpn context Context1`
`policy group PolicyGroup1`
`svc module RDP`

Answer: C

Explanation:

Reference: <https://community.cisco.com/t5/vpn/starting-anyconnect-vpn-through-rdp-session-on-cisco-891/td-p/2128284>

NEW QUESTION 10

Refer to the exhibit.



Which two commands under the tunnel-group webvpn-attributes result in a Cisco AnyConnect user receiving the AnyConnect prompt in the exhibit? (Choose two.)

- A. `group-url https://172.16.31.10/General enable`
- B. `group-policy General internal`
- C. `authentication aaa`
- D. `authentication certificate`
- E. `group-alias General enable`

Answer: BE

NEW QUESTION 14

Which requirement is needed to use local authentication for Cisco AnyConnect Secure Mobility Clients that connect to a FlexVPN server?

- A. use of certificates instead of username and password
- B. EAP-AnyConnect
- C. EAP query-identity
- D. AnyConnect profile

Answer: D

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security/flexvpn/200555-FlexVPN-AnyConnect-IKEv2-Remote-Access.html>

NEW QUESTION 15

Which IKE identity does an IOS/IOS-XE headend expect to receive if an IPsec Cisco AnyConnect client uses default settings?

- A. *\$SecureMobilityClient\$*
- B. *\$AnyConnectClient\$*
- C. *\$RemoteAccessVpnClient\$*
- D. *\$DfltIkeIdentity\$*

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security/flexvpn/200555-FlexVPN-AnyConnect-IKEv2-Remote-Access.html>

NEW QUESTION 16

In a FlexVPN deployment, the spokes successfully connect to the hub, but spoke-to-spoke tunnels do not form. Which troubleshooting step solves the issue?

- A. Verify the spoke configuration to check if the NHRP redirect is enabled.
- B. Verify that the spoke receives redirect messages and sends resolution requests.
- C. Verify the hub configuration to check if the NHRP shortcut is enabled.
- D. Verify that the tunnel interface is contained within a VRF.

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_conn_dmvpn/configuration/15-mt/sec-conn-dmvpn-15-mt-book/sec-conn-dmvpn-summaps.pdf

NEW QUESTION 20

An engineer is troubleshooting a new DMVPN setup on a Cisco IOS router. After the show crypto isakmp sa command is issued, a response is returned of "MM_NO_STATE." Why does this failure occur?

- A. The ISAKMP policy priority values are invalid.
- B. ESP traffic is being dropped.
- C. The Phase 1 policy does not match on both devices.
- D. Tunnel protection is not applied to the DMVPN tunnel.

Answer: B

NEW QUESTION 25

Refer to the exhibit.

```
ISAKMP: (0):beginning Main Mode exchange
ISAKMP-PAK: (0):sending packet to 192.168.0.8 my_port 500 peer_port 500 (I) MM_NO_STATE
ISAKMP-PAK: (0):received packet from 192.168.0.8 dport 500 sport 500 Global (I) MM_NO_STATE
ISAKMP: (0):Old State = IKE_I_MM1 New State = IKE_I_MM2
ISAKMP: (0):found peer pre-shared key matching 192.168.0.8
ISAKMP: (0):local preshared key found
ISAKMP: (0):Checking ISAKMP transform 1 against priority 10 policy
ISAKMP: (0): encryption AES-CBC
ISAKMP: (0): keylength of 256
ISAKMP: (0): hash SHA256
ISAKMP: (0): default group 14
ISAKMP: (0): auth pre-share
ISAKMP: (0): life type in seconds
ISAKMP: (0): life duration (basic) of 1200
ISAKMP: (0):atts are acceptable. Next payload is 0
ISAKMP-PAK: (0):sending packet to 192.168.0.8 my_port 500 peer_port 500 (I) MM_SA_SETUP
ISAKMP: (0):Old State = IKE_I_MM2 New State = IKE_I_MM3
ISAKMP-PAK: (0):received packet from 192.168.0.8 dport 500 sport 500 Global (I) MM_SA_SETUP
ISAKMP: (0):Old State = IKE_I_MM3 New State = IKE_I_MM4
ISAKMP: (0):found peer pre-shared key matching 192.168.0.8
ISAKMP: (1005):Old State = IKE_I_MM4 New State = IKE_I_MM4
ISAKMP: (1005):pre-shared key authentication using id type ID_IPV4_ADDR
ISAKMP-PAK: (1005):sending packet to 192.168.0.8 my_port 4500 peer_port 4500 (I) MM_KEY_EXCH
ISAKMP: (1005):Old State = IKE_I_MM4 New State = IKE_I_MM5
ISAKMP-PAK: (1005):received packet from 192.168.0.8 dport 500 sport 500 Global (I) MM_KEY_EXCH
ISAKMP: (1005):phase 1 packet is a duplicate of a previous packet.
ISAKMP: (1005):retransmitting due to retransmit phase 1
ISAKMP: (1005):retransmitting phase 1 MM_KEY_EXCH...
ISAKMP: (1005):: incrementing error counter on sa, attempt 1 of 5: retransmit phase 1
ISAKMP-PAK: (1005):sending packet to 192.168.0.8 my_port 4500 peer_port 4500 (I) MM_KEY_EXCH
ISAKMP-PAK: (1005):received packet from 192.168.0.8 dport 500 sport 500 Global (I) MM_KEY_EXCH
ISAKMP: (1005):phase 1 packet is a duplicate of a previous packet.
ISAKMP: (1005):retransmitting due to retransmit phase 1
```

A site-to-site tunnel between two sites is not coming up. Based on the debugs, what is the cause of this issue?

- A. An authentication failure occurs on the remote peer.
- B. A certificate fragmentation issue occurs between both sides.
- C. UDP 4500 traffic from the peer does not reach the router.
- D. An authentication failure occurs on the router.

Answer: C

NEW QUESTION 28

Refer to the exhibit.

```
IKEv2:(SESSION ID = 17,SA ID = 1):Processing IKE_AUTH message
IKEv2:IPsec policy validate request sent for profile CloudOne with psh index 1.

IKEv2:(SESSION ID = 17,SA ID = 1):
IKEv2:(SA ID = 1):[IPsec -> IKEv2] Callback received for the validate proposal - FAILED.

IKEv2-ERROR:(SESSION ID = 17,SA ID = 1):: There was no IPSEC policy found for received TS
IKEv2:(SESSION ID = 17,SA ID = 1):Sending TS unacceptable notify
IKEv2:(SESSION ID = 17,SA ID = 1):Get my authentication method
IKEv2:(SESSION ID = 17,SA ID = 1):My authentication method is 'PSK'
IKEv2:(SESSION ID = 17,SA ID = 1):Get peer's preshared key for 68.72.250.251
IKEv2:(SESSION ID = 17,SA ID = 1):Generate my authentication data
IKEv2:(SESSION ID = 17,SA ID = 1):Use preshared key for id 68.72.250.250, key len 5
IKEv2:[IKEv2 -> Crypto Engine] Generate IKEv2 authentication data
IKEv2:[Crypto Engine -> IKEv2] IKEv2 authentication data generation PASSED
IKEv2:(SESSION ID = 17,SA ID = 1):Get my authentication method
IKEv2:(SESSION ID = 17,SA ID = 1):My authentication method is 'PSK'
IKEv2:(SESSION ID = 17,SA ID = 1):Generating IKE_AUTH message
IKEv2:(SESSION ID = 17,SA ID = 1):Constructing IDr payload: '68.72.250.250' of type 'IPv4 address'
IKEv2:(SESSION ID = 17,SA ID = 1):Building packet for encryption.
Payload contents:
VID IDr AUTH NOTIFY(TS_UNACCEPTABLE)

IKEv2:(SESSION ID = 17,SA ID = 1):Sending Packet [To 68.72.250.251:500/From 68.72.250.250:500/VRF i0:f0]
Initiator SPI : 3D527B1D50DBEEF4 - Responder SPI : 8C693F77F2656636 Message id: 1
IKEv2 IKE_AUTH Exchange RESPONSE
Payload contents:
ENCR
```

Based on the debug output, which type of mismatch is preventing the VPN from coming up?

- A. interesting traffic
- B. lifetime
- C. preshared key
- D. PFS

Answer: B

Explanation:

If the responder's policy does not allow it to accept any part of the proposed Traffic Selectors, it responds with a TS_UNACCEPTABLE Notify message.

NEW QUESTION 31

Refer to the exhibit.

```
*Jul 16 20:21:25.317: ISAKMP (1004): received packet from 192.168.0.2 dport
500 sport 500 Global (R) MM_KEY_EXCH
*Jul 16 20:21:25.317: ISAKMP: reserved not zero on ID payload!
*Jul 16 20:21:25.317: %CRYPTO-4-IKMP_BAD_MESSAGE: IKE message from 192.168.0.2
failed its sanity check or is malformed
```

Which type of mismatch is causing the problem with the IPsec VPN tunnel?

- A. crypto access list
- B. Phase 1 policy
- C. transform set
- D. preshared key


Answer: D

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security-vpn/ipsec-negotiation-ike-protocols/5409-ipsec-debug-00.html#ike>

NEW QUESTION 34

Refer to the exhibit.

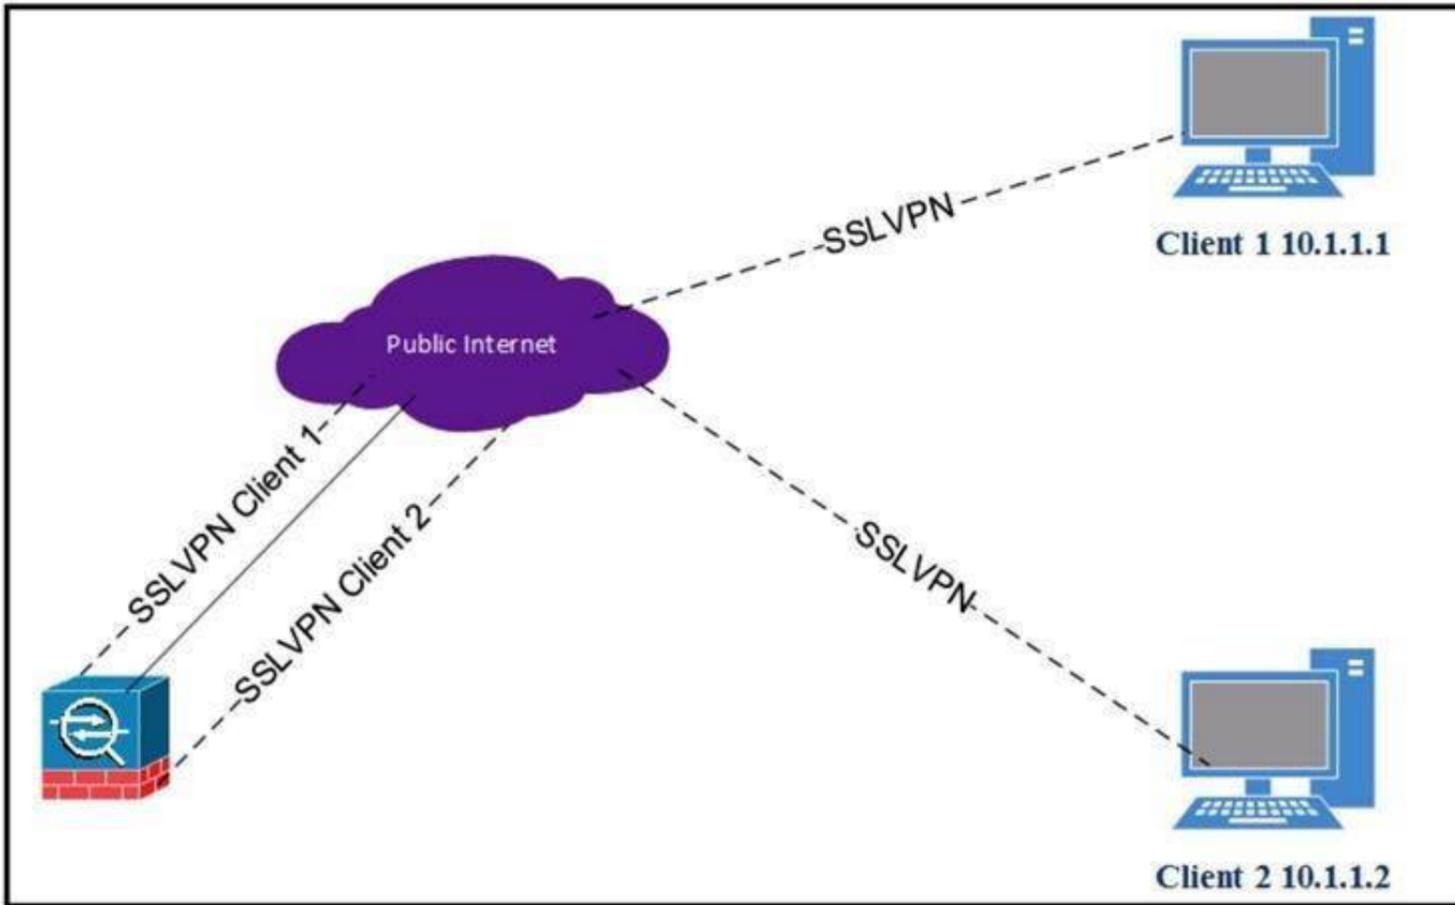

Client 1 cannot communicate with client 2. Both clients are using Cisco AnyConnect and have established a successful SSL VPN connection to the hub ASA. Which command on the ASA is missing?

- A. dns-server value 10.1.1.2
- B. same-security-traffic permit intra-interface
- C. same-security-traffic permit inter-interface
- D. dns-server value 10.1.1.3

Answer: B

NEW QUESTION 36

Which redundancy protocol must be implemented for IPsec stateless failover to work?

- A. SSO
- B. GLBP
- C. HSRP
- D. VRRP

Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/security-vpn/ipsec-negotiation-ike-protocols/17826-ipsec-feat.html>

NEW QUESTION 37

Which two remote access VPN solutions support SSL? (Choose two.)

- A. FlexVPN
- B. clientless
- C. EZVPN
- D. L2TP
- E. Cisco AnyConnect

Answer: BE

NEW QUESTION 42

Refer to the exhibit.

```
crypto isakmp policy 10
  encr aes 256
  hash sha256
  authentication pre-share
  group 14

crypto isakmp key cisco address 0.0.0.0

crypto ipsec transform-set TS esp-aes 256 esp-sha256-hmac
  mode transport

crypto ipsec profile CCNP
  set transform-set TS

interface Tunnel1
  ip address 10.0.0.1 255.255.255.0
  tunnel source GigabitEthernet1
  tunnel mode ipsec ipv4
  tunnel destination 172.18.10.2
  tunnel protection ipsec profile CCNP
```

Which VPN technology is used in the exhibit?

- A. DVTI
- B. VTI
- C. DMVPN
- D. GRE

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_conn_vpnips/configuration/zZ-Archive/IPsec_Virtual_Tunnel_Interface.html#GUID-EB8C433B-2394-42B9-997F-B40803E58A91

NEW QUESTION 45

Which parameter must match on all routers in a DMVPN Phase 3 cloud?

- A. GRE tunnel key
- B. NHRP network ID
- C. tunnel VRF
- D. EIGRP split-horizon setting

Answer: A

NEW QUESTION 47

Which parameter is initially used to elect the primary key server from a group of key servers?

- A. code version
- B. highest IP address
- C. highest-priority value
- D. lowest IP address

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/products/collateral/security/group-encrypted-transport-vpn/deployment_guide_c07_554713.html

NEW QUESTION 48

Which benefit of FlexVPN is a limitation of DMVPN using IKEv1?

- A. GRE encapsulation allows for forwarding of non-IP traffic.
- B. IKE implementation can install routes in routing table.
- C. NHRP authentication provides enhanced security.
- D. Dynamic routing protocols can be configured.

Answer: B

NEW QUESTION 50

Where is split tunneling defined for IKEv2 remote access clients on a Cisco router?

- A. IKEv2 authorization policy
- B. Group Policy
- C. virtual template
- D. webvpn context

Answer: B

NEW QUESTION 55

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-730 Practice Exam Features:

- * 300-730 Questions and Answers Updated Frequently
- * 300-730 Practice Questions Verified by Expert Senior Certified Staff
- * 300-730 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-730 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click
[Order The 300-730 Practice Test Here](#)**