



ISC2

Exam Questions SSCP

System Security Certified Practitioner (SSCP)

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

- (Topic 1)

The Terminal Access Controller Access Control System (TACACS) employs which of the following?

- A. a user ID and static password for network access
- B. a user ID and dynamic password for network access
- C. a user ID and symmetric password for network access
- D. a user ID and asymmetric password for network access

Answer: A

Explanation:

For networked applications, the Terminal Access Controller Access Control System (TACACS) employs a user ID and a static password for network access.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 44.

NEW QUESTION 2

- (Topic 1)

The type of discretionary access control (DAC) that is based on an individual's identity is also called:

- A. Identity-based Access control
- B. Rule-based Access control
- C. Non-Discretionary Access Control
- D. Lattice-based Access control

Answer: A

Explanation:

An identity-based access control is a type of Discretionary Access Control (DAC) that is based on an individual's identity. DAC is good for low level security environment. The owner of the file decides who has access to the file. If a user creates a file, he is the owner of that file. An identifier for this user is placed in the file header and/or in an access control matrix within the operating system. Ownership might also be granted to a specific individual. For example, a manager for a certain department might be made the owner of the files and resources within her department. A system that uses discretionary access control (DAC) enables the owner of the resource to specify which subjects can access specific resources. This model is called discretionary because the control of access is based on the discretion of the owner. Many times department managers, or business unit managers, are the owners of the data within their specific department. Being the owner, they can specify who should have access and who should not. Reference(s) used for this question:
Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 220). McGraw- Hill . Kindle Edition.

NEW QUESTION 3

- (Topic 1)

Detective/Technical measures:

- A. include intrusion detection systems and automatically-generated violation reports from audit trail information.
- B. do not include intrusion detection systems and automatically-generated violation reports from audit trail information.
- C. include intrusion detection systems but do not include automatically-generated violation reports from audit trail information.
- D. include intrusion detection systems and customised-generated violation reports from audit trail information.

Answer: A

Explanation:

Detective/Technical measures include intrusion detection systems and automatically-generated violation reports from audit trail information. These reports can indicate variations from "normal" operation or detect known signatures of unauthorized access episodes. In order to limit the amount of audit information flagged and reported by automated violation analysis and reporting mechanisms, clipping levels can be set. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

NEW QUESTION 4

- (Topic 1)

Which is the last line of defense in a physical security sense?

- A. people
- B. interior barriers
- C. exterior barriers
- D. perimeter barriers

Answer: A

Explanation:

"Ultimately, people are the last line of defense for your company's assets" (Pastore & Dulaney, 2006, p. 529).
Pastore, M. and Dulaney, E. (2006). CompTIA Security+ study guide: Exam SY0-101. Indianapolis, IN: Sybex.

NEW QUESTION 5

- (Topic 1)

Physical security is accomplished through proper facility construction, fire and water protection, anti-theft mechanisms, intrusion detection systems, and security procedures that are adhered to and enforced. Which of the following is not a component that achieves this type of security?

- A. Administrative control mechanisms
- B. Integrity control mechanisms
- C. Technical control mechanisms
- D. Physical control mechanisms

Answer: B

Explanation:

Integrity Controls Mechanisms are not part of physical security. All of the other detractors were correct this one was the wrong one that does not belong to Physical Security. Below you have more details extracted from the SearchSecurity web site: Information security depends on the security and management of the physical space in which computer systems operate. Domain 9 of the CISSP exam's Common Body of Knowledge addresses the challenges of securing the physical space, its systems and the people who work within it by use of administrative, technical and physical controls. The following QUESTION NO: s are covered:

Facilities management: The administrative processes that govern the maintenance and protection of the physical operations space, from site selection through emergency response.

Risks, issues and protection strategies: Risk identification and the selection of security protection components.

Perimeter security: Typical physical protection controls.

Facilities management

Facilities management is a complex component of corporate security that ranges from the planning of a secure physical site to the management of the physical information system environment. Facilities management responsibilities include site selection and physical security planning (i.e. facility construction, design and layout, fire and water damage protection, antitheft mechanisms, intrusion detection and security procedures.) Protections must extend to both people and assets. The necessary level of protection depends on the value of the assets and data. CISSP® candidates must learn the concept of critical-path analysis as a means of determining a component's business function criticality relative to the cost of operation and replacement. Furthermore, students need to gain an understanding of the optimal location and physical attributes of a secure facility. Among the QUESTION NO: s covered in this domain are site inspection, location, accessibility and obscurity, considering the area crime rate, and the likelihood of natural hazards such as floods or earthquakes.

This domain also covers the quality of construction material, such as its protective qualities and load capabilities, as well as how to lay out the structure to minimize risk of forcible entry and accidental damage. Regulatory compliance is also touched on, as is preferred proximity to civil protection services, such as fire and police stations. Attention is given to computer and equipment rooms, including their location, configuration (entrance/egress requirements) and their proximity to wiring distribution centers at the site.

Physical risks, issues and protection strategies

An overview of physical security risks includes risk of theft, service interruption, physical damage, compromised system integrity and unauthorized disclosure of information. Interruptions to business can manifest due to loss of power, services, telecommunications connectivity and water supply. These can also seriously compromise electronic security monitoring alarm/response devices. Backup options are also covered in this domain, as is a strategy for quantifying the risk exposure by simple formula.

Investment in preventive security can be costly. Appropriate redundancy of people skills, systems and infrastructure must be based on the criticality of the data and assets to be preserved. Therefore a strategy is presented that helps determine the selection of cost appropriate controls. Among the QUESTION NO: s covered in this domain are regulatory and legal requirements, common standard security protections such as locks and fences, and the importance of establishing service level agreements for maintenance and disaster support. Rounding out the optimization approach are simple calculations for determining mean time between failure and mean time to repair (used to estimate average equipment life expectancy) — essential for estimating the cost/benefit of purchasing and maintaining redundant equipment.

As the lifeblood of computer systems, special attention is placed on adequacy, quality and protection of power supplies. CISSP candidates need to understand power supply concepts and terminology, including those for quality (i.e. transient noise vs. clean power); types of interference (EMI and RFI); and types of interruptions such as power excess by spikes and surges, power loss by fault or blackout, and power degradation from sags and brownouts. A simple formula is presented for determining the total cost per hour for backup power. Proving power reliability through testing is recommended and the advantages of three power protection approaches are discussed (standby UPS, power line conditioners and backup sources) including minimum requirements for primary and alternate power provided.

Environmental controls are explored in this domain, including the value of positive pressure water drains and climate monitoring devices used to control temperature, humidity and reduce static electricity. Optimal temperatures and humidity settings are provided.

Recommendations include strict procedures during emergencies, preventing typical risks (such as blocked fans), and the use of antistatic armbands and hygrometers. Positive pressurization for proper ventilation and monitoring for air born contaminants is stressed.

The pros and cons of several detection response systems are deeply explored in this domain. The concept of combustion, the classes of fire and fire extinguisher ratings are detailed. Mechanisms behind smoke-activated, heat-activated and flame-activated devices and Automatic Dial-up alarms are covered, along with their advantages, costs and shortcomings. Types of fire sources are distinguished and the effectiveness of fire suppression methods for each is included. For instance, Halon and its approved replacements are covered, as are the advantages and the inherent risks to equipment of the use of water sprinklers.

Administrative controls

The physical security domain also deals with administrative controls applied to physical sites and assets. The need for skilled personnel, knowledge sharing between them, separation of duties, and appropriate oversight in the care and maintenance of equipment and environments is stressed. A list of management duties including hiring checks, employee maintenance activities and recommended termination procedures is offered. Emergency measures include accountability for evacuation and system shutdown procedures, integration with disaster and business continuity plans, assuring documented procedures are easily available during different types of emergencies, the scheduling of periodic equipment testing, administrative reviews of documentation, procedures and recovery plans, responsibilities delegation, and personnel training and drills.

Perimeter security

Domain nine also covers the devices and techniques used to control access to a space. These include access control devices, surveillance monitoring, intrusion detection and corrective actions. Specifications are provided for optimal external boundary protection, including fence heights and placement, and lighting placement and types. Selection of door types and lock characteristics are covered. Surveillance methods and intrusion-detection methods are explained, including the use of video monitoring, guards, dogs, proximity detection systems, photoelectric/photometric systems, wave pattern devices, passive infrared systems, and sound and motion detectors, and current flow sensitivity devices that specifically address computer theft. Room lock types — both preset and cipher locks (and their variations) -- device locks, such as portable laptop locks, lockable server bays, switch control locks and slot locks, port controls, peripheral switch controls and cable trap locks are also covered. Personal access control methods used to identify authorized users for site entry are covered at length, noting social engineering risks such as piggybacking. Wireless proximity devices, both user access and system sensing readers are covered (i.e. transponder based, passive devices and field powered devices) in this domain.

Now that you've been introduced to the key concepts of Domain 9, watch the Domain 9, Physical Security video

Return to the CISSP Essentials Security School main page

See all SearchSecurity.com's resources on CISSP certification training Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 280.

NEW QUESTION 6

- (Topic 1)

A potential problem related to the physical installation of the Iris Scanner in regards to the usage of the iris pattern within a biometric system is:

- A. concern that the laser beam may cause eye damage
- B. the iris pattern changes as a person grows older.

- C. there is a relatively high rate of false accepts.
- D. the optical unit must be positioned so that the sun does not shine into the aperture.

Answer: D

Explanation:

Because the optical unit utilizes a camera and infrared light to create the images, sun light can impact the aperture so it must not be positioned in direct light of any type. Because the subject does not need to have direct contact with the optical reader, direct light can impact the reader.

An Iris recognition is a form of biometrics that is based on the uniqueness of a subject's iris. A camera like device records the patterns of the iris creating what is known as Iriscode.

It is the unique patterns of the iris that allow it to be one of the most accurate forms of biometric identification of an individual. Unlike other types of biometrics, the iris rarely changes over time. Fingerprints can change over time due to scaring and manual labor, voice patterns can change due to a variety of causes, hand geometry can also change as well. But barring surgery or an accident it is not usual for an iris to change. The subject has a high-resolution image taken of their iris and this is then converted to Iriscode. The current standard for the Iriscode was developed by John Daugman. When the subject attempts to be authenticated an infrared light is used to capture the iris image and this image is then compared to the Iriscode. If there is a match the subject's identity is confirmed. The subject does not need to have direct contact with the optical reader so it is a less invasive means of authentication then retinal scanning would be.

Reference(s) used for this question: AIO, 3rd edition, Access Control, p 134. AIO, 4th edition, Access Control, p 182.

Wikipedia - http://en.wikipedia.org/wiki/Iris_recognition The following answers are incorrect:

concern that the laser beam may cause eye damage. The optical readers do not use laser so, concern that the laser beam may cause eye damage is not an issue. the iris pattern changes as a person grows older. The question asked about the physical installation of the scanner, so this was not the best answer. If the question would have been about long term problems then it could have been the best choice. Recent research has shown that Irises actually do change over time:

<http://www.nature.com/news/ageing-eyes-hinder-biometric-scans-1.10722>

there is a relatively high rate of false accepts. Since the advent of the Iriscode there is a very low rate of false accepts, in fact the algorithm used has never had a false match. This all depends on the quality of the equipment used but because of the uniqueness of the iris even when comparing identical twins, iris patterns are unique.

NEW QUESTION 7

- (Topic 1)

Crime Prevention Through Environmental Design (CPTED) is a discipline that:

- A. Outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior.
- B. Outlines how the proper design of the logical environment can reduce crime by directly affecting human behavior.
- C. Outlines how the proper design of the detective control environment can reduce crime by directly affecting human behavior.
- D. Outlines how the proper design of the administrative control environment can reduce crime by directly affecting human behavior.

Answer: A

Explanation:

Crime Prevention Through Environmental Design (CPTED) is a discipline that outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior. It provides guidance about lost and crime prevention through proper facility construction and environmental components and procedures.

CPTED concepts were developed in the 1960s. They have been expanded upon and have matured as our environments and crime types have evolved. CPTED has been used not just to develop corporate physical security programs, but also for large-scale activities such as development of neighborhoods, towns, and cities. It addresses landscaping, entrances, facility and neighborhood layouts, lighting, road placement, and traffic circulation patterns. It looks at microenvironments, such as offices and rest-rooms, and macroenvironments, like campuses and cities.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 435). McGraw- Hill. Kindle Edition.

and

CPTED Guide Book

NEW QUESTION 8

- (Topic 1)

To control access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up:

- A. Access Rules
- B. Access Matrix
- C. Identification controls
- D. Access terminal

Answer: A

Explanation:

Controlling access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up access rules.

These rules can be classified into three access control models: Mandatory, Discretionary, and Non-Discretionary.

An access matrix is one of the means used to implement access control.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 9

- (Topic 1)

Which of the following is most affected by denial-of-service (DOS) attacks?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

Answer: D

Explanation:

Denial of service attacks obviously affect availability of targeted systems. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the

NEW QUESTION 10

- (Topic 1)

Which of the following would be used to implement Mandatory Access Control (MAC)?

- A. Clark-Wilson Access Control
- B. Role-based access control
- C. Lattice-based access control
- D. User dictated access control

Answer: C

Explanation:

The lattice is a mechanism use to implement Mandatory Access Control (MAC)

Under Mandatory Access Control (MAC) you have: Mandatory Access Control

Under Non Discretionary Access Control (NDAC) you have: Rule-Based Access Control
 Role-Based Access Control

Under Discretionary Access Control (DAC) you have: Discretionary Access Control

The Lattice Based Access Control is a type of access control used to implement other access control method. A lattice is an ordered list of elements that has a least upper bound and a most lower bound. The lattice can be used for MAC, DAC, Integrity level, File Permission, and more

For example in the case of MAC, if we look at common government classifications, we have the following:

TOP SECRET

SECRET -----I am the user at secret CONFIDENTIAL

SENSITIVE BUT UNCLASSIFIED UNCLASSIFIED

If you look at the diagram above where I am a user at SECRET it means that I can access document at lower classification but not document at TOP SECRET.

The lattice is a list of ORDERED ELEMENT, in this case the ordered elements are classification levels. My least upper bound is SECRET and my most lower bound is UNCLASSIFIED.

However the lattice could also be used for Integrity Levels such as: VERY HIGH

HIGH

MEDIUM -----I am a user, process, application at the medium level LOW

VERY LOW

In the case of of Integrity levels you have to think about TRUST. Of course if I take for example the the VISTA operating system which is based on Biba then

Integrity Levels would be used. As a user having access to the system I cannot tell a process running with administrative privilege what to do. Else any users on the system could take control of the system by getting highly privilege process to do things on their behalf. So no read down would be allowed in this case and this is an example of the Biba model.

Last but not least the lattice could be use for file permissions: RWX

RW -----User at this level

R

If I am a user with READ and WRITE (RW) access privilege then I cannot execute the file

because I do not have execute permission which is the X under linux and UNIX.

Many people confuse the Lattice Model and many books says MAC = LATTICE, however the lattice can be use for other purposes.

There is also Role Based Access Control (RBAC) that exists out there. It COULD be used to simulate MAC but it is not MAC as it does not make use of Label on objects indicating sensitivity and categories. MAC also require a clearance that dominates the object.

You can get more info about RBAC at:<http://csrc.nist.gov/groups/SNS/rbac/faq.html#03> Also note that many book uses the same acronym for Role Based Access Control and Rule

Based Access Control which is RBAC, this can be confusing.

The proper way of writing the acronym for Rule Based Access Control is RuBAC, unfortunately it is not commonly used.

References:

There is a great article on technet that talks about the lattice in VISTA: <http://blogs.technet.com/b/steriley/archive/2006/07/21/442870.aspx>

also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

and

http://www.microsoft-watch.com/content/vista/gaging_vistas_integrity.html

NEW QUESTION 10

- (Topic 1)

Which of the following offers advantages such as the ability to use stronger passwords, easier password administration, one set of credential, and faster resource access?

- A. Smart cards
- B. Single Sign-On (SSO)
- C. Symmetric Ciphers
- D. Public Key Infrastructure (PKI)

Answer: B

Explanation:

The advantages of SSO include having the ability to use stronger passwords, easier administration as far as changing or deleting the passwords, minimize the risks of orphan accounts, and requiring less time to access resources.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 39.

NEW QUESTION 12

- (Topic 1)

Which of the following is an example of a passive attack?

- A. Denying services to legitimate users
- B. Shoulder surfing
- C. Brute-force password cracking

D. Smurfing

Answer: B

Explanation:

Shoulder surfing is a form of a passive attack involving stealing passwords, personal identification numbers or other confidential information by looking over someone's shoulder. All other forms of attack are active attacks, where a threat makes a modification to the system in an attempt to take advantage of a vulnerability.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 3: Security Management Practices (page 63).

NEW QUESTION 17

- (Topic 1)

Which of the following access control techniques best gives the security officers the ability to specify and enforce enterprise-specific security policies in a way that maps naturally to an organization's structure?

- A. Access control lists
- B. Discretionary access control
- C. Role-based access control
- D. Non-mandatory access control

Answer: C

Explanation:

Role-based access control (RBAC) gives the security officers the ability to specify and enforce enterprise-specific security policies in a way that maps naturally to an organization's structure. Each user is assigned one or more roles, and each role is assigned one or more privileges that are given to users in that role. An access control list (ACL) is a table that tells a system which access rights each user has to a particular system object. With discretionary access control, administration is decentralized and owners of resources control other users' access. Non-mandatory access control is not a defined access control technique.

Source: ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 2: Access Control Systems and Methodology (page 9).

NEW QUESTION 20

- (Topic 1)

In the Bell-LaPadula model, the Star-property is also called:

- A. The simple security property
- B. The confidentiality property
- C. The confinement property
- D. The tranquility property

Answer: B

Explanation:

The Bell-LaPadula model focuses on data confidentiality and access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity.

In this formal model, the entities in an information system are divided into subjects and objects.

The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby proving that the system satisfies the security objectives of the model.

The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a system. The transition from one state to another state is defined by transition functions.

A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy.

To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode.

The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:

The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).

The property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The property is also known as the Confinement property.

The Discretionary Security Property - use an access control matrix to specify the discretionary access control.

The transfer of information from a high-sensitivity document to a lower-sensitivity document may happen in the Bell-LaPadula model via the concept of trusted subjects. Trusted Subjects are not restricted by the property. Untrusted subjects are.

Trusted Subjects must be shown to be trustworthy with regard to the security policy. This security model is directed toward access control and is characterized by the phrase: "no read up, no write down." Compare the Biba model, the Clark-Wilson model and the Chinese Wall.

With Bell-LaPadula, users can create content only at or above their own security level (i.e. secret researchers can create secret or top-secret files but may not create public files; no write-down). Conversely, users can view content only at or below their own security level (i.e. secret researchers can view public or secret files, but may not view top-secret files; no read-up).

Strong Property

The Strong Property is an alternative to the Property in which subjects may write to objects with only a matching security level. Thus, the write-up operation permitted in the usual Property is not present, only a write-to-same level operation. The Strong Property is usually discussed in the context of multilevel database management systems and is motivated by integrity concerns.

Tranquility principle

The tranquility principle of the Bell-LaPadula model states that the classification of a subject or object does not change while it is being referenced. There are two forms to the tranquility principle: the "principle of strong tranquility" states that security levels do not change during the normal operation of the system and the "principle of weak tranquility" states that security levels do not change in a way that violates the rules of a given security policy.

Another interpretation of the tranquility principles is that they both apply only to the period of time during which an operation involving an object or subject is occurring. That is, the strong tranquility principle means that an object's security level/label will not change during an operation (such as read or write); the weak tranquility principle means that an object's security level/label may change in a way that does not violate the security policy during an operation.

Reference(s) used for this question: http://en.wikipedia.org/wiki/Biba_Model

http://en.wikipedia.org/wiki/Mandatory_access_control http://en.wikipedia.org/wiki/Discretionary_access_control http://en.wikipedia.org/wiki/Clark-Wilson_model

http://en.wikipedia.org/wiki/Brewer_and_Nash_model

NEW QUESTION 25

- (Topic 1)

What does the (star) property mean in the Bell-LaPadula model?

- A. No write up
- B. No read up
- C. No write down
- D. No read down

Answer: C

Explanation:

The (star) property of the Bell-LaPadula access control model states that writing of information by a subject at a higher level of sensitivity to an object at a lower level of sensitivity is not permitted (no write down).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 202).

Also check out: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 5: Security Models and Architecture (page 242, 243).

NEW QUESTION 29

- (Topic 1)

Which of the following centralized access control mechanisms is the least appropriate for mobile workers accessing the corporate network over analog lines?

- A. TACACS
- B. Call-back
- C. CHAP
- D. RADIUS

Answer: B

Explanation:

Call-back allows for a distant user connecting into a system to be called back at a number already listed in a database of trusted users. The disadvantage of this system is that the user must be at a fixed location whose phone number is known to the authentication server. Being mobile workers, users are accessing the system from multiple

locations, making call-back inappropriate for them.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 44).

NEW QUESTION 32

- (Topic 1)

Which of the following questions is less likely to help in assessing identification and authentication controls?

- A. Is a current list maintained and approved of authorized users and their access?
- B. Are passwords changed at least every ninety days or earlier if needed?
- C. Are inactive user identifications disabled after a specified period of time?
- D. Is there a process for reporting incidents?

Answer: D

Explanation:

Identification and authentication is a technical measure that prevents unauthorized people (or unauthorized processes) from entering an IT system. Access control usually requires that the system be able to identify and differentiate among users. Reporting incidents is more related to incident response capability (operational control) than to identification and authentication (technical control).

Source: SWANSON, Marianne, NIST Special Publication 800-26, Security Self- Assessment Guide for Information Technology Systems, November 2001 (Pages A-30 to A-32).

NEW QUESTION 33

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

Answer: A

Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

NEW QUESTION 38

- (Topic 1)

In discretionary access environments, which of the following entities is authorized to grant information access to other people?

- A. Manager
- B. Group Leader
- C. Security Manager
- D. Data Owner

Answer: D

Explanation:

In Discretionary Access Control (DAC) environments, the user who creates a file is also considered the owner and has full control over the file including the ability to set permissions for that file.

The following answers are incorrect:

manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

group leader. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

security manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

IMPORTANT NOTE:

The term Data Owner is also used within Classifications as well. Under the subject of classification the Data Owner is a person from management who has been entrusted with a data set that belongs to the company. For example it could be the Chief Financial Officer (CFO) who is entrusted with all of the financial data for a company. As such the CFO would determine the classification of the financial data and who can access as well. The Data Owner would then tell the Data Custodian (a technical person) what the classification and need to know is on the specific set of data.

The term Data Owner under DAC simply means whoever created the file and as the creator of the file the owner has full access and can grant access to other subjects based on their identity.

NEW QUESTION 43

- (Topic 1)

Controls to keep password sniffing attacks from compromising computer systems include which of the following?

- A. static and recurring passwords.
- B. encryption and recurring passwords.
- C. one-time passwords and encryption.
- D. static and one-time passwords.

Answer: C

Explanation:

To minimize the chance of passwords being captured one-time passwords would prevent a password sniffing attack because once used it is no longer valid. Encryption will also minimize these types of attacks.

The following answers are correct:

static and recurring passwords. This is incorrect because if there is no encryption then someone password sniffing would be able to capture the password much easier if it never changed.

encryption and recurring passwords. This is incorrect because while encryption helps, recurring passwords do nothing to minimize the risk of passwords being captured.

static and one-time passwords. This is incorrect because while one-time passwords will prevent these types of attacks, static passwords do nothing to minimize the risk of passwords being captured.

NEW QUESTION 44

- (Topic 1)

Which integrity model defines a constrained data item, an integrity verification procedure and a transformation procedure?

- A. The Take-Grant model
- B. The Biba integrity model
- C. The Clark Wilson integrity model
- D. The Bell-LaPadula integrity model

Answer: C

Explanation:

The Clark Wilson integrity model addresses the three following integrity goals: 1) data is protected from modification by unauthorized users; 2) data is protected from unauthorized modification by authorized users; and 3) data is internally and externally consistent. It also defines a Constrained Data Item (CDI), an Integrity Verification Procedure (IVP), a Transformation Procedure (TP) and an Unconstrained Data item. The Bell-LaPadula and Take-Grant models are not integrity models.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architecture and Models (page 205).

NEW QUESTION 45

- (Topic 1)

What does the Clark-Wilson security model focus on?

- A. Confidentiality
- B. Integrity
- C. Accountability
- D. Availability

Answer: B

Explanation:

The Clark-Wilson model addresses integrity. It incorporates mechanisms to enforce internal and external consistency, a separation of duty, and a mandatory integrity policy.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 205).

NEW QUESTION 46

- (Topic 1)

Which of the following biometric devices has the lowest user acceptance level?

- A. Retina Scan
- B. Fingerprint scan
- C. Hand geometry
- D. Signature recognition

Answer: A

Explanation:

According to the cited reference, of the given options, the Retina scan has the lowest user acceptance level as it is needed for the user to get his eye close to a device and it is not user friendly and very intrusive.

However, retina scan is the most precise with about one error per 10 millions usage. Look at the 2 tables below. If necessary right click on the image and save it on your

desktop for a larger view or visit the web site directly at

<https://sites.google.com/site/biometricsecuritysolutions/crossover-accuracy> . Biometric Comparison Chart

BIOMETRICS COMPARISON CHART

Biometric	Verify	ID	Accuracy	Reliability	Error Rate	Errors	False Pos.	False Neg.
Fingerprint	Yes	Yes	Very High	High	1 in 500+	dryness, dirt, age	Ext. Diff.	Ext. Diff.
Facial Recognition	Yes	No	High	Medium	no data	lighting, age, glasses, hair	Difficult	Easy
Hand Geometry	Yes	No	High	Medium	1 in 100	hand injury, age	Very Diff.	Medium
Signature Recognition	Yes	No	Medium	Low	1 in 50	noise, weather, darts	Medium	Easy
Iris Scan	Yes	Yes	Very High	High	1 in 131,000	poor lighting	Very Diff.	Very Diff.
Retinal Scan	Yes	Yes	Very High	High	1 in 10,000,000	glasses	Ext. Diff.	Ext. Diff.
Signature Recognition	Yes	No	Medium	Low	1 in 50	changing signatures	Medium	Easy
Keystroke Recognition	Yes	No	Low	Low	no data	hand injury, tiredness	Difficult	Easy
DNA	Yes	Yes	Very High	High	no data	none	Ext. Diff.	Ext. Diff.

Biometric	Security Level	Long-term Stability	User Acceptance	Intrusive	Ease of Use	Low Cost	Hardware	Standards
Fingerprint	High	High	Medium	Somewhat	High	Yes	Special, cheap	Yes
Facial Recognition	Medium	Medium	Medium	Non	Medium	Yes	Common, cheap	?
Hand Geometry	Medium	Medium	Medium	Non	High	No	Special, mid-price	?
Signature Recognition	Medium	Medium	High	Non	High	Yes	Common, cheap	?
Iris Scan	High	High	Medium	Non	Medium	No	Special, expensive	?
Retinal Scan	High	High	Medium	Very	Low	No	Special, expensive	?
Signature Recognition	Medium	Medium	Medium	Non	High	Yes	Special, mid-price	?
Keystroke Recognition	Medium	Low	High	Non	High	Yes	Common, cheap	?
DNA	High	High	Low	Extremely	Low	No	Special, expensive	Yes

C:\Users\MCS\Desktop\1.jpg

Aspect descriptions:

Verify	Whether or not the Biometric is capable of verification. Verification is the process where an input is compared to specific data previously recorded from the user to see if the person is who they claim to be.
ID	Whether or not the Biometric is capable of identification. Identification is the process where an input is compared to a large data set previously recorded from many people to see which person the user is.
Accuracy	How well the Biometric is able to tell individuals apart. This is partially determined by the amount of information gathered as well as the number of possible different data results.
Reliability	How dependable the Biometric is for recognition purposes.
Error Rate	This is calculated as the crossing point when graphed of false positives and false negatives created using this Biometric.
Errors	Typical causes of errors for this Biometric.
False Pos.	How easy it is to create a false positive reading with this biometric (someone is able to impersonate someone else).
False Neg.	How easy it is to create a false negative reading with this biometric (someone is able to avoid identification as oneself).
Security Level	The highest level of security that this Biometric is capable of working at.
Long-term Stability	How well this Biometric continues to work without data updates over long periods of time.
User Acceptance	How willing the public is to use this Biometric.
Intrusiveness	How much the Biometric is considered to invade one's privacy or require interaction by the user.
Ease of Use	How easy this Biometric is for both the user and the personnel involved.
Low Cost	Whether or not there is a low-cost option for this Biometric to be used.
Hardware	Type and cost of hardware required to use this Biometric.
Standards	Whether or not standards exist for this Biometric.

C:\Users\MCS\Desktop\1.jpg

Biometric Aspect Descriptions Reference(s) used for this question:

RHODES, Keith A., Chief Technologist, United States General Accounting Office, National Preparedness, Technologies to Secure Federal Buildings, April 2002 (page 10).

and

<https://sites.google.com/site/biometricsecuritysolutions/crossover-accuracy>

NEW QUESTION 50

- (Topic 1)

Which access control model provides upper and lower bounds of access capabilities for a subject?

- A. Role-based access control
- B. Lattice-based access control
- C. Biba access control
- D. Content-dependent access control

Answer: B

Explanation:

In the lattice model, users are assigned security clearances and the data is classified. Access decisions are made based on the clearance of the user and the classification of the object. Lattice-based access control is an essential ingredient of formal security models such as Bell-LaPadula, Biba, Chinese Wall, etc. The bounds concept comes from the formal definition of a lattice as a "partially ordered set for which every pair of elements has a greatest lower bound and a least upper bound." To see the application, consider a file classified as "SECRET" and a user Joe with a security clearance of "TOP SECRET." Under Bell-LaPadula,

Joe's "least upper bound" access to the file is "READ" and his least lower bound is "NO WRITE" (star property).

Role-based access control is incorrect. Under RBAC, the access is controlled by the permissions assigned to a role and the specific role assigned to the user.

Biba access control is incorrect. The Biba integrity model is based on a lattice structure but the context of the question disqualifies it as the best answer.

Content-dependent access control is incorrect. In content dependent access control, the actual content of the information determines access as enforced by the arbiter.

References:

CBK, pp. 324-325.

AIO3, pp. 291-293. See particularly Figure 5-19 on p. 293 for an illustration of bounds in action.

NEW QUESTION 53

- (Topic 1)

Which of the following statements pertaining to biometrics is FALSE?

- A. User can be authenticated based on behavior.
- B. User can be authenticated based on unique physical attributes.
- C. User can be authenticated by what he knows.
- D. A biometric system's accuracy is determined by its crossover error rate (CER).

Answer: C

Explanation:

As this is not a characteristic of Biometrics this is the right choice for this question. This is one of the three basic ways authentication can be performed and it is not related to Biometrics. Example of something you know would be a password or PIN for example.

Please make a note of the negative 'FALSE' within the question. This question may seem tricky to some of you but you would be amazed at how many people cannot deal with negative questions. There will be a few negative questions within the real exam, just like this one the keyword NOT or FALSE will be in Uppercase to clearly indicate that it is negative.

Biometrics verifies an individual's identity by analyzing a unique personal attribute or behavior, which is one of the most effective and accurate methods of performing authentication (one to one matching) or identification (a one to many matching).

A biometric system scans an attribute or behavior of a person and compares it to a template store within an authentication server database, such template would be created in an earlier enrollment process. Because this system inspects the grooves of a person's fingerprint, the pattern of someone's retina, or the pitches of someone's voice, it has to be extremely sensitive.

The system must perform accurate and repeatable measurements of anatomical or physiological characteristics. This type of sensitivity can easily cause false positives or false negatives. The system must be calibrated so that these false positives and false negatives occur infrequently and the results are as accurate as possible.

There are two types of failures in biometric identification:

False Rejection also called False Rejection Rate (FRR) — The system fails to recognize a legitimate user. While it could be argued that this has the effect of keeping the protected area extra secure, it is an intolerable frustration to legitimate users who are refused access because the scanner does not recognize them.

False Acceptance or False Acceptance Rate (FAR) — This is an erroneous recognition, either by confusing one user with another or by accepting an imposter as a legitimate user.

Physiological Examples:

Unique Physical Attributes:

Fingerprint (Most commonly accepted) Hand Geometry

Retina Scan (Most accurate but most intrusive) Iris Scan

Vascular Scan Behavioral Examples:

Repeated Actions Keystroke Dynamics

(Dwell time (the time a key is pressed) and Flight time (the time between "key up" and the next "key down")).

Signature Dynamics

(Stroke and pressure points)

EXAM TIP:

Retina scan devices are the most accurate but also the most invasive biometrics system available today. The continuity of the retinal pattern throughout life and the difficulty in fooling such a device also make it a great long-term, high-security option. Unfortunately, the cost of the proprietary hardware as well as the stigma of users thinking it is potentially harmful to the eye makes retinal scanning a bad fit for most situations.

Remember for the exam that fingerprints are the most commonly accepted type of biometrics system.

The other answers are incorrect:

'Users can be authenticated based on behavior.' is incorrect as this choice is TRUE as it pertains to BIOMETRICS.

Biometrics systems make use of unique physical characteristics or behavior of users.

'User can be authenticated based on unique physical attributes.' is also incorrect as this choice is also TRUE as it pertains to BIOMETRICS. Biometrics systems make use of unique physical characteristics or behavior of users.

'A biometric system's accuracy is determined by its crossover error rate (CER)' is also incorrect as this is TRUE as it also pertains to BIOMETRICS. The CER is the point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25353-25356). Auerbach Publications. Kindle Edition.

and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 25297-25303). Auerbach Publications. Kindle Edition.

NEW QUESTION 54

- (Topic 1)

Which of the following protocols was used by the INITIAL version of the Terminal Access Controller Access Control System TACACS for communication between clients and servers?

- A. TCP
- B. SSL
- C. UDP
- D. SSH

Answer: C

Explanation:

The original TACACS, developed in the early ARPANet days, had very limited functionality and used the UDP transport. In the early 1990s, the protocol was extended to include additional functionality and the transport changed to TCP. TACACS is defined in RFC 1492, and uses (either TCP or UDP) port 49 by default. TACACS allows a client to accept a username and password and send a query to a TACACS authentication server, sometimes called a TACACS daemon or simply TACACSD. TACACSD uses TCP and usually runs on port 49. It would determine whether to accept or deny the authentication request and send a response back.

TACACS+

TACACS+ and RADIUS have generally replaced TACACS and XTACACS in more recently built or updated networks. TACACS+ is an entirely new protocol and is not compatible with TACACS or XTACACS. TACACS+ uses the Transmission Control Protocol (TCP) and RADIUS uses the User Datagram Protocol (UDP).

Since TCP is connection oriented

protocol, TACACS+ does not have to implement transmission control. RADIUS, however, does have to detect and correct transmission errors like packet loss, timeout etc. since it rides on UDP which is connectionless.

RADIUS encrypts only the users' password as it travels from the RADIUS client to RADIUS server. All other information such as the username, authorization, accounting are transmitted in clear text. Therefore it is vulnerable to different types of attacks. TACACS+ encrypts all the information mentioned above and therefore does not have the vulnerabilities present in the RADIUS protocol.

RADIUS and TACACS + are client/ server protocols, which means the server portion cannot send unsolicited commands to the client portion. The server portion can only speak when spoken to. Diameter is a peer-based protocol that allows either end to initiate communication. This functionality allows the Diameter server to send a message to the access server to request the user to provide another authentication credential if she is attempting to access a secure resource.

Reference(s) used for this question: <http://en.wikipedia.org/wiki/TACACS>

and

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 239). McGraw- Hill. Kindle Edition.

NEW QUESTION 56

- (Topic 1)

Which access control type has a central authority that determine to what objects the subjects have access to and it is based on role or on the organizational security policy?

- A. Mandatory Access Control
- B. Discretionary Access Control
- C. Non-Discretionary Access Control
- D. Rule-based Access control

Answer: C

Explanation:

Non Discretionary Access Control include Role Based Access Control (RBAC) and Rule Based Access Control (RBAC or RuBAC). RABC being a subset of NDAC, it was easy to eliminate RBAC as it was covered under NDAC already.

Some people think that RBAC is synonymous with NDAC but RuBAC would also fall into this category.

Discretionary Access control is for environment with very low level of security. There is no control on the dissemination of the information. A user who has access to a file can copy the file or further share it with other users.

Rule Based Access Control is when you have ONE set of rules applied uniformly to all users. A good example would be a firewall at the edge of your network. A single rule based is applied against any packets received from the internet.

Mandatory Access Control is a very rigid type of access control. The subject must dominate the object and the subject must have a Need To Know to access the information. Objects have labels that indicate the sensitivity (classification) and there is also categories to enforce the Need To Know (NTK).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 61

- (Topic 1)

What is the PRIMARY use of a password?

- A. Allow access to files.
- B. Identify the user.
- C. Authenticate the user.
- D. Segregate various user's accesses.

Answer: C

Explanation:

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 65

- (Topic 1)

Which of the following is used by RADIUS for communication between clients and servers?

- A. TCP
- B. SSL
- C. UDP
- D. SSH

Answer: C

Explanation:

Source: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 2, 2001, CRC Press, NY, Page 33.

NEW QUESTION 68

- (Topic 1)

What is called a password that is the same for each log-on session?

- A. "one-time password"

- B. "two-time password"
- C. static password
- D. dynamic password

Answer: C

Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 72

- (Topic 1)

Which security model is based on the military classification of data and people with clearances?

- A. Brewer-Nash model
- B. Clark-Wilson model
- C. Bell-LaPadula model
- D. Biba model

Answer: C

Explanation:

The Bell-LaPadula model is a confidentiality model for information security based on the military classification of data, on people with clearances and data with a classification or sensitivity model. The Biba, Clark-Wilson and Brewer-Nash models are concerned with integrity.

Source: HARE, Chris, Security Architecture and Models, Area 6 CISSP Open Study Guide, January 2002.

NEW QUESTION 76

- (Topic 1)

Which of the following is the most reliable authentication method for remote access?

- A. Variable callback system
- B. Synchronous token
- C. Fixed callback system
- D. Combination of callback and caller ID

Answer: B

Explanation:

A Synchronous token generates a one-time password that is only valid for a short period of time. Once the password is used it is no longer valid, and it expires if not entered in the acceptable time frame.

The following answers are incorrect:

Variable callback system. Although variable callback systems are more flexible than fixed callback systems, the system assumes the identity of the individual unless two-factor authentication is also implemented. By itself, this method might allow an attacker access as a trusted user.

Fixed callback system. Authentication provides assurance that someone or something is who or what he/it is supposed to be. Callback systems authenticate a person, but anyone can pretend to be that person. They are tied to a specific place and phone number, which can be spoofed by implementing call-forwarding.

Combination of callback and Caller ID. The caller ID and callback functionality provides greater confidence and auditability of the caller's identity. By disconnecting and calling back only authorized phone numbers, the system has a greater confidence in the location of the call. However, unless combined with strong authentication, any individual at the location could obtain access.

The following reference(s) were/was used to create this question: Shon Harris AIO v3 p. 140, 548

ISC2 OIG 2007 p. 152-153, 126-127

NEW QUESTION 79

- (Topic 1)

What is the main objective of proper separation of duties?

- A. To prevent employees from disclosing sensitive information.
- B. To ensure access controls are in place.
- C. To ensure that no single individual can compromise a system.
- D. To ensure that audit trails are not tampered with.

Answer: C

Explanation:

The primary objective of proper separation of duties is to ensure that one person acting alone cannot compromise the company's security in any way. A proper separation of duties does not prevent employees from disclosing information, nor does it ensure that access controls are in place or that audit trails are not tampered with. Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 12: Operations Security (Page 808).

NEW QUESTION 80

- (Topic 1)

Which of the following would constitute the best example of a password to use for access to a system by a network administrator?

- A. holiday
- B. Christmas12
- C. Jenny
- D. GyN19Za!

Answer: D

Explanation:

GyN19Za! would be the the best answer because it contains a mixture of upper and lower case characters, alphabetic and numeric characters, and a special character making it less vulnerable to password attacks.
All of the other answers are incorrect because they are vulnerable to brute force or dictionary attacks. Passwords should not be common words or names. The addition of a number to the end of a common word only marginally strengthens it because a common password attack would also check combinations of words: Christmas23 Christmas123 etc...

NEW QUESTION 82

- (Topic 1)

Which of the following is not a physical control for physical security?

- A. lighting
- B. fences
- C. training
- D. facility construction materials

Answer: C

Explanation:

Some physical controls include fences, lights, locks, and facility construction materials. Some administrative controls include facility selection and construction, facility management, personnel controls, training, and emergency response and procedures.

From: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 3rd. Ed., Chapter 6, page 403.

NEW QUESTION 84

- (Topic 1)

Which TCSEC class specifies discretionary protection?

- A. B2
- B. B1
- C. C2
- D. C1

Answer: D

Explanation:

C1 involves discretionary protection, C2 involves controlled access protection, B1 involves labeled security protection and B2 involves structured protection.

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 88

- (Topic 1)

Guards are appropriate whenever the function required by the security program involves which of the following?

- A. The use of discriminating judgment
- B. The use of physical force
- C. The operation of access control devices
- D. The need to detect unauthorized access

Answer: A

Explanation:

The Answer The use of discriminating judgment, a guard can make the determinations that hardware or other automated security devices cannot make due to its ability to adjust to rapidly changing conditions, to learn and alter recognizable patterns, and to respond to various conditions in the environment. Guards are better at making value decisions at times of incidents. They are appropriate whenever immediate, discriminating judgment is required by the security entity.

The following answers are incorrect:

The use of physical force This is not the best answer. A guard provides discriminating judgment, and the ability to discern the need for physical force.

The operation of access control devices A guard is often uninvolved in the operations of an automated access control device such as a biometric reader, a smart lock, mantrap, etc. The need to detect unauthorized access The primary function of a guard is not to detect unauthorized access, but to prevent unauthorized physical access attempts and may deter social engineering attempts.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 339).

Source: ISC2 Official Guide to the CBK page 288-289.

NEW QUESTION 92

- (Topic 1)

Which of the following was developed by the National Computer Security Center (NCSC) for the US Department of Defense ?

- A. TCSEC
- B. ITSEC
- C. DIACAP
- D. NIACAP

Answer: A

Explanation:

The Answer TCSEC; The TCSEC, frequently referred to as the Orange Book, is the centerpiece of the DoD Rainbow Series publications.

Initially issued by the National Computer Security Center (NCSC) an arm of the National Security Agency in 1983 and then updated in 1985, TCSEC was replaced with the development of the Common Criteria international standard originally published in 2005.

References:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, pages 197-199.

Wikipedia <http://en.wikipedia.org/wiki/TCSEC>

NEW QUESTION 95

- (Topic 1)

In regards to information classification what is the main responsibility of information (data) owner?

- A. determining the data sensitivity or classification level
- B. running regular data backups
- C. audit the data users
- D. periodically check the validity and accuracy of the data

Answer: A

Explanation:

Making the determination to decide what level of classification the information requires is the main responsibility of the data owner.

The data owner within classification is a person from Management who has been entrusted with a data set that belong to the company. It could be for example the Chief Financial Officer (CFO) who has been entrusted with all financial data or it could be the Human Resource Director who has been entrusted with all Human Resource data. The information owner will decide what classification will be applied to the data based on Confidentiality, Integrity, Availability, Criticality, and Sensitivity of the data.

The Custodian is the technical person who will implement the proper classification on objects in accordance with the Data Owner. The custodian DOES NOT decide what classification to apply, it is the Data Owner who will dictate to the Custodian what is the classification to apply.

NOTE:

The term Data Owner is also used within Discretionary Access Control (DAC). Within DAC it means the person who has created an object. For example, if I create a file on my system then I am the owner of the file and I can decide who else could get access to the file. It is left to my discretion. Within DAC access is granted based solely on the Identity of the subject, this is why sometimes DAC is referred to as Identity Based Access Control.

The other choices were not the best answer

Running regular backups is the responsibility of custodian. Audit the data users is the responsibility of the auditors

Periodically check the validity and accuracy of the data is not one of the data owner responsibility

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Page 14, Chapter 1: Security Management Practices.

NEW QUESTION 98

- (Topic 1)

What is called the verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time?

- A. Authentication
- B. Identification
- C. Integrity
- D. Confidentiality

Answer: A

Explanation:

Authentication is verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 101

- (Topic 1)

When submitting a passphrase for authentication, the passphrase is converted into ...

- A. a virtual password by the system
- B. a new passphrase by the system
- C. a new passphrase by the encryption technology
- D. a real password by the system which can be used forever

Answer: A

Explanation:

Passwords can be compromised and must be protected. In the ideal case, a password should only be used once. The changing of passwords can also fall between these two extremes.

Passwords can be required to change monthly, quarterly, or at other intervals, depending on the criticality of the information needing protection and the password's frequency of use.

Obviously, the more times a password is used, the more chance there is of it being compromised.

It is recommended to use a passphrase instead of a password. A passphrase is more resistant to attacks. The passphrase is converted into a virtual password by the system. Often time the passphrase will exceed the maximum length supported by the system and it must be truncated into a Virtual Password.

Reference(s) used for this question: <http://www.itl.nist.gov/fipspubs/fip112.htm>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36 & 37.

NEW QUESTION 106

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

Answer: D

Explanation:

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

NEW QUESTION 108

- (Topic 1)

A department manager has read access to the salaries of the employees in his/her department but not to the salaries of employees in other departments. A database security mechanism that enforces this policy would typically be said to provide which of the following?

- A. Content-dependent access control
- B. Context-dependent access control
- C. Least privileges access control
- D. Ownership-based access control

Answer: A

Explanation:

When access control is based on the content of an object, it is considered to be content dependent access control.

Content-dependent access control is based on the content itself. The following answers are incorrect:

context-dependent access control. Is incorrect because this type of control is based on what the context is, facts about the data rather than what the object contains.

least privileges access control. Is incorrect because this is based on the least amount of rights needed to perform their jobs and not based on what is contained in the database. ownership-based access control. Is incorrect because this is based on the owner of the data and not based on what is contained in the database.

References:

OIG CBK Access Control (page 191)

NEW QUESTION 112

- (Topic 1)

The Orange Book is founded upon which security policy model?

- A. The Biba Model
- B. The Bell LaPadula Model
- C. Clark-Wilson Model
- D. TEMPEST

Answer: B

Explanation:

From the glossary of Computer Security Basics:

The Bell-LaPadula model is the security policy model on which the Orange Book requirements are based. From the Orange Book definition, "A formal state transition model of computer security policy that describes a set of access control rules. In this formal model, the entities in a computer system are divided into abstract sets of subjects and objects. The notion of secure state is defined and it is proven that each state transition preserves security by moving from secure state to secure state; thus, inductively proving the system is secure. A system state is defined to be 'secure' if the only permitted access modes of subjects to objects are in accordance with a specific security policy. In order to determine whether or not a specific access mode is allowed, the clearance of a subject is compared to the classification of the object and a determination is made as to whether the subject is authorized for the specific access mode."

The Biba Model is an integrity model of computer security policy that describes a set of rules. In this model, a subject may not depend on any object or other subject that is less trusted than itself.

The Clark Wilson Model is an integrity model for computer security policy designed for a commercial environment. It addresses such concepts as nondiscretionary access control, privilege separation, and least privilege. TEMPEST is a government program that prevents the compromising electrical and electromagnetic signals that emanate from computers and related equipment from being intercepted and deciphered.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, 1991.

Also: U.S. Department of Defense, Trusted Computer System Evaluation Criteria (Orange Book), DOD 5200.28-STD. December 1985 (also available here).

NEW QUESTION 114

- (Topic 1)

Which of the following Operation Security controls is intended to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system?

- A. Detective Controls
- B. Preventative Controls
- C. Corrective Controls
- D. Directive Controls

Answer: B

Explanation:

In the Operations Security domain, Preventative Controls are designed to prevent unauthorized intruders from internally or externally accessing the system, and to lower the amount and impact of unintentional errors that are entering the system. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 217.

NEW QUESTION 119

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement

- B. Ground floor
- C. Third floor
- D. Sixth floor

Answer: C

Explanation:

You data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well. Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation

considering the quantity of electrical cabling sitting directly on the cement floor under under your raise floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

NEW QUESTION 122

- (Topic 1)

Which of the following choices describe a Challenge-response tokens generation?

- A. A workstation or system that generates a random challenge string that the user enters into the token when prompted along with the proper PIN.
- B. A workstation or system that generates a random login id that the user enters when prompted along with the proper PIN.
- C. A special hardware device that is used to generate random text in a cryptography system.
- D. The authentication mechanism in the workstation or system does not determine if the owner should be authenticated.

Answer: A

Explanation:

Challenge-response tokens are:

- A workstation or system generates a random challenge string and the owner enters the string into the token along with the proper PIN.
- The token generates a response that is then entered into the workstation or system.
- The authentication mechanism in the workstation or system then determines if the owner should be authenticated.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 136-137).

NEW QUESTION 126

- (Topic 1)

This baseline sets certain thresholds for specific errors or mistakes allowed and the amount of these occurrences that can take place before it is considered suspicious?

- A. Checkpoint level
- B. Ceiling level
- C. Clipping level
- D. Threshold level

Answer: C

Explanation:

Organizations usually forgive a particular type, number, or pattern of violations, thus permitting a predetermined number of user errors before gathering this data for analysis. An organization attempting to track all violations, without sophisticated statistical computing ability, would be unable to manage the sheer quantity of such data. To make a violation listing effective, a clipping level must be established.

The clipping level establishes a baseline for violation activities that may be normal user errors. Only after this baseline is exceeded is a violation record produced.

This solution is particularly effective for small- to medium-sized installations. Organizations with large-scale computing facilities often track all violations and use statistical routines to cull out the minor infractions (e.g., forgetting a password or mistyping it several times).

If the number of violations being tracked becomes unmanageable, the first step in correcting the problems should be to analyze why the condition has occurred.

Do users understand how they are to interact with the computer resource? Are the rules too difficult to follow? Violation tracking and analysis can be valuable tools in assisting an organization to develop thorough but useable controls. Once these are in place and records are produced that accurately reflect serious violations, tracking and analysis become the first line of defense. With this procedure, intrusions are discovered before major damage occurs and sometimes early enough to catch the perpetrator. In addition, business protection and preservation are strengthened.

The following answers are incorrect:

All of the other choices presented were simply detractors. The following reference(s) were used for this question:

Handbook of Information Security Management

NEW QUESTION 130

- (Topic 1)

In biometrics, "one-to-many" search against database of stored biometric images is done in:

- A. Authentication
- B. Identification
- C. Identities
- D. Identity-based access control

Answer: B

Explanation:

In biometrics, identification is a "one-to-many" search of an individual's characteristics from a database of stored images.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 132

- (Topic 1)

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has the possibility of generating:

- A. Lower False Rejection Rate (FRR)
- B. Higher False Rejection Rate (FRR)
- C. Higher False Acceptance Rate (FAR)
- D. It will not affect either FAR or FRR

Answer: B

Explanation:

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has a higher False Rejection Rate (FRR).

Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the Cross Over Error (CER) rate is used. The Crossover Error Rate (CER) is the point at which the false rejection rates and the false acceptance rates are equal. The lower the value of the CER, the more accurate the system.

There are three categories of biometric accuracy measurement (all represented as percentages):

False Reject Rate (a Type I Error): When authorized users are falsely rejected as unidentified or unverified.

False Accept Rate (a Type II Error): When unauthorized persons or imposters are falsely accepted as authentic.

Crossover Error Rate (CER): The point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

NOTE:

Within the ISC2 book they make use of the term Accept or Acceptance and also Reject or Rejection when referring to the type of errors within biometrics. Below we make use of Acceptance and Rejection throughout the text for consistency. However, on the real exam you could see either of the terms.

Performance of biometrics

Different metrics can be used to rate the performance of a biometric factor, solution or application. The most common performance metrics are the False Acceptance Rate FAR and the False Rejection Rate FRR.

When using a biometric application for the first time the user needs to enroll to the system. The system requests fingerprints, a voice recording or another biometric factor from the

operator, this input is registered in the database as a template which is linked internally to a user ID. The next time when the user wants to authenticate or identify himself, the biometric input provided by the user is compared to the template(s) in the database by a matching algorithm which responds with acceptance (match) or rejection (no match).

FAR and FRR

The FAR or False Acceptance rate is the probability that the system incorrectly authorizes a non-authorized person, due to incorrectly matching the biometric input with a valid template. The FAR is normally expressed as a percentage, following the FAR definition this is the percentage of invalid inputs which are incorrectly accepted.

The FRR or False Rejection Rate is the probability that the system incorrectly rejects access to an authorized person, due to failing to match the biometric input provided by the user with a stored template. The FRR is normally expressed as a percentage, following the FRR definition this is the percentage of valid inputs which are incorrectly rejected.

FAR and FRR are very much dependent on the biometric factor that is used and on the technical implementation of the biometric solution. Furthermore the FRR is strongly person dependent, a personal FRR can be determined for each individual.

Take this into account when determining the FRR of a biometric solution, one person is insufficient to establish an overall FRR for a solution. Also FRR might increase due to environmental conditions or incorrect use, for example when using dirty fingers on a fingerprint reader. Mostly the FRR lowers when a user gains more experience in how to use the biometric device or software.


FAR and FRR are key metrics for biometric solutions, some biometric devices or software even allow to tune them so that the system more quickly matches or rejects. Both FRR and FAR are important, but for most applications one of them is considered most important. Two examples to illustrate this:

When biometrics are used for logical or physical access control, the objective of the application is to disallow access to unauthorized individuals under all circumstances. It is clear that a very low FAR is needed for such an application, even if it comes at the price of a higher FRR.

When surveillance cameras are used to screen a crowd of people for missing children, the objective of the application is to identify any missing children that come up on the screen. When the identification of those children is automated using a face recognition software, this software has to be set up with a low FRR. As such a higher number of matches will be false positives, but these can be reviewed quickly by surveillance personnel.

False Acceptance Rate is also called False Match Rate, and False Rejection Rate is sometimes referred to as False Non-Match Rate.

crossover error rate

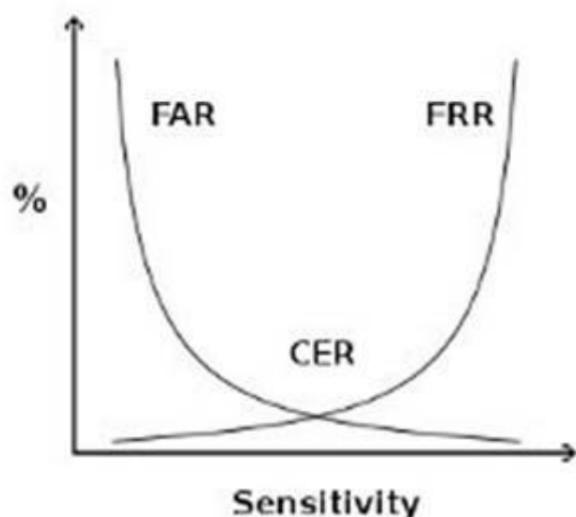

crossover error rate

Above see a graphical representation of FAR and FRR errors on a graph, indicating the CER

CER

The Crossover Error Rate or CER is illustrated on the graph above. It is the rate where both FAR and FRR are equal.

The matching algorithm in a biometric software or device uses a (configurable) threshold which determines how close to a template the input must be for it to be considered a match. This threshold value is in some cases referred to as sensitivity, it is marked on the X axis of the plot. When you reduce this threshold there will be more false acceptance errors (higher FAR) and less false rejection errors (lower FRR), a higher threshold will lead to lower FAR and higher FRR.

Speed

Most manufacturers of biometric devices and softwares can give clear numbers on the time it takes to enroll as well on the time for an individual to be authenticated or identified using their application. If speed is important then take your time to consider this, 5 seconds might seem a short time on paper or when testing a device but if hundreds of people will use the device multiple times a day the cumulative loss of time might be significant.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2723-2731). Auerbach Publications. Kindle Edition.

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

and

http://www.biometric-solutions.com/index.php?story=performance_biometrics

NEW QUESTION 135

- (Topic 1)

What are the components of an object's sensitivity label?

- A. A Classification Set and a single Compartment.
- B. A single classification and a single compartment.
- C. A Classification Set and user credentials.
- D. A single classification and a Compartment Set.

Answer: D

Explanation:

Both are the components of a sensitivity label. The following are incorrect:

A Classification Set and a single Compartment. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not a "single compartment" but a Compartment Set.

A single classification and a single compartment. Is incorrect because while there only is one classification, it is not a "single compartment" but a Compartment Set.

A Classification Set and user credentials. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not "user credential" but a Compartment Set. The user would have their own sensitivity label.

NEW QUESTION 139

- (Topic 1)

Which of the following is the WEAKEST authentication mechanism?

- A. Passphrases
- B. Passwords
- C. One-time passwords
- D. Token devices

Answer: B

Explanation:

Most of the time users usually choose passwords which can be guessed, hence passwords is the BEST answer out of the choices listed above.

The following answers are incorrect because:

Passphrases is incorrect as it is more secure than a password because it is longer.

One-time passwords is incorrect as the name states, it is good for only once and cannot be reused.

Token devices is incorrect as this is also a password generator and is an one time password mechanism.

Reference: Shon Harris AIO v3, Chapter-4: Access Control, Page: 139, 142.

NEW QUESTION 142

- (Topic 1)

What is the name of the first mathematical model of a multi-level security policy used to define the concept of a secure state, the modes of access, and rules for granting access?

- A. Clark and Wilson Model
- B. Harrison-Ruzzo-Ullman Model
- C. Rivest and Shamir Model
- D. Bell-LaPadula Model

Answer: D

Explanation:

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 146

- (Topic 1)

Which of the following is true about Kerberos?

- A. It utilizes public key cryptography.
- B. It encrypts data after a ticket is granted, but passwords are exchanged in plain text.
- C. It depends upon symmetric ciphers.
- D. It is a second party authentication system.

Answer: C

Explanation:

Kerberos depends on secret keys (symmetric ciphers). Kerberos is a third party authentication protocol. It was designed and developed in the mid 1980's by MIT.

It is considered open source but is copyrighted and owned by MIT. It relies on the user's secret keys. The password is used to encrypt and decrypt the keys. The following answers are incorrect:

It utilizes public key cryptography. Is incorrect because Kerberos depends on secret keys (symmetric ciphers).

It encrypts data after a ticket is granted, but passwords are exchanged in plain text. Is incorrect because the passwords are not exchanged but used for encryption and decryption of the keys.

It is a second party authentication system. Is incorrect because Kerberos is a third party authentication system, you authenticate to the third party (Kerberos) and not the system you are accessing.

References:

MIT <http://web.mit.edu/kerberos/>

Wikipedi http://en.wikipedia.org/wiki/Kerberos_%28protocol%29

OIG CBK Access Control (pages 181 - 184) AIOv3 Access Control (pages 151 - 155)

NEW QUESTION 147

- (Topic 1)

Which of the following remote access authentication systems is the most robust?

- A. TACACS+
- B. RADIUS
- C. PAP
- D. TACACS

Answer: A

Explanation:

TACACS+ is a proprietary Cisco enhancement to TACACS and is more robust than RADIUS. PAP is not a remote access authentication system but a remote node security protocol.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 122).

NEW QUESTION 151

- (Topic 1)

What is called the percentage at which the False Rejection Rate equals the False Acceptance Rate?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. Failure to enroll rate (FTE or FER)

Answer: C

Explanation:

The percentage at which the False Rejection Rate equals the False Acceptance Rate is called the Crossover Error Rate (CER). Another name for the CER is the Equal Error Rate (EER), any of the two terms could be used.

Equal error rate or crossover error rate (EER or CER)

It is the rate at which both accept and reject errors are equal. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

The other choices were all wrong answers:

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. This is when an impostor would be accepted by the system.

False reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected. This is when a valid company employee would be rejected by the system.

Failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

and <https://en.wikipedia.org/wiki/Biometrics>

NEW QUESTION 152

- (Topic 1)

Which of the following is not a two-factor authentication mechanism?

- A. Something you have and something you know.
- B. Something you do and a password.
- C. A smartcard and something you are.
- D. Something you know and a password.

Answer: D

Explanation:

Something you know and a password fits within only one of the three ways authentication could be done. A password is an example of something you know, thereby something you know and a password does not constitute a two-factor authentication as both are in the same category of factors.

A two-factor (strong) authentication relies on two different kinds of authentication factors out of a list of three possible choice:

something you know (e.g. a PIN or password),

something you have (e.g. a smart card, token, magnetic card),

something you are is mostly Biometrics (e.g. a fingerprint) or something you do (e.g. signature dynamics).

TIP FROM CLEMENT:

On the real exam you can expect to see synonyms and sometimes sub-categories under the main categories. People are familiar with Pin, Passphrase, Password as subset of Something you know.

However, when people see choices such as Something you do or Something you are they immediately get confused and they do not think of them as subset of Biometrics where you have Biometric implementation based on behavior and physiological attributes. So something you do falls under the Something you are category as a subset.

Something your do would be signing your name or typing text on your keyboard for example.

Strong authentication is simply when you make use of two factors that are within two different categories.

Reference(s) used for this question:

Shon Harris, CISSP All In One, Fifth Edition, pages 158-159

NEW QUESTION 157

- (Topic 1)

In an organization where there are frequent personnel changes, non-discretionary access control using Role Based Access Control (RBAC) is useful because:

- A. people need not use discretion
- B. the access controls are based on the individual's role or title within the organization.
- C. the access controls are not based on the individual's role or title within the organization
- D. the access controls are often based on the individual's role or title within the organization

Answer: B

Explanation:

In an organization where there are frequent personnel changes, non- discretionary access control (also called Role Based Access Control) is useful because the access controls are based on the individual's role or title within the organization. You can easily configure a new employee access by assigning the user to a role that has been predefined. The user will implicitly inherit the permissions of the role by being a member of that role.

These access permissions defined within the role do not need to be changed whenever a new person takes over the role.

Another type of non-discretionary access control model is the Rule Based Access Control (RBAC or RuBAC) where a global set of rule is uniformly applied to all subjects accessing the resources. A good example of RuBAC would be a firewall.

This question is a sneaky one, one of the choice has only one added word to it which is often. Reading questions and their choices very carefully is a must for the real exam. Reading it twice if needed is recommended.

Shon Harris in her book list the following ways of managing RBAC: Role-based access control can be managed in the following ways:

Non-RBAC Users are mapped directly to applications and no roles are used. (No roles being used)

Limited RBAC Users are mapped to multiple roles and mapped directly to other types of applications that do not have role-based access functionality. (A mix of roles for applications that supports roles and explicit access control would be used for applications that do not support roles)

Hybrid RBAC Users are mapped to multiapplication roles with only selected rights assigned to those roles.

Full RBAC Users are mapped to enterprise roles. (Roles are used for all access being granted)

NIST defines RBAC as:

Security administration can be costly and prone to error because administrators usually specify access control lists for each user on the system individually. With RBAC, security is managed at a level that corresponds closely to the organization's structure. Each user is assigned one or more roles, and each role is assigned one or more privileges that are permitted to users in that role. Security administration with RBAC consists of determining the operations that must be executed by persons in particular jobs, and assigning employees to the proper roles. Complexities introduced by mutually exclusive roles or role hierarchies are handled by the RBAC software, making security administration easier.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 32.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition McGraw-Hill. and

<http://csrc.nist.gov/groups/SNS/rbac/>

NEW QUESTION 162

- (Topic 1)

What is called a sequence of characters that is usually longer than the allotted number for a password?

- A. passphrase
- B. cognitive phrase
- C. anticipated phrase
- D. Real phrase

Answer: A

Explanation:

A passphrase is a sequence of characters that is usually longer than the allotted number for a password.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, page 37.

NEW QUESTION 166

- (Topic 1)

Which division of the Orange Book deals with discretionary protection (need-to-know)?

- A. D
- B. C
- C. B
- D. A

Answer: B

Explanation:

C deals with discretionary protection. See matrix below:

TNI/TCSEC MATRIX

	A1	B3	B2	B1	C2	C1
DISCRETIONARY ACCESS						
Discretionary Access Control						
Identification and Authentication						
System Integrity						
System Architecture						
Security Testing						
Security Features User's Guide Trusted Facility Manual Design Documentation Test Documentation						
CONTROLLED ACCESS						
Protect Audit Trails						
Object Reuse						
MANDATORY ACCESS CONTROL						
Labels						
Mandatory Access Control						
Process isolation in system architecture						
Design Specification & Verification						
Device labels						
Subject Sensitivity Labels						
Trusted Path						
Separation of Administrator and User functions						
Covert Channel Analysis (Only Covert Storage Channel at B2)						
Trusted Facility Management						
Configuration Management						
Trusted Recovery						
Covert Channel Analysis (Both Timing and Covert Channel analysis at B3)						
Security Administrator Role Defined						
Monitor events and notify security personnel						
Trusted Distribution						
Formal Methods						
	A1	B3	B2	B1	C2	C1

C:\Users\MCS\Desktop\1.jpg

TCSEC Matric

The following are incorrect answers:

D is incorrect. D deals with minimal security.

B is incorrect. B deals with mandatory protection. A is incorrect. A deals with verified protection. Reference(s) used for this question:

CBK, p. 329 – 330

and

Shon Harris, CISSP All In One (AIO), 6th Edition , page 392-393

NEW QUESTION 170

- (Topic 1)

Which access control model was proposed for enforcing access control in government and military applications?

- A. Bell-LaPadula model
- B. Biba model
- C. Sutherland model
- D. Brewer-Nash model

Answer: A

Explanation:

The Bell-LaPadula model, mostly concerned with confidentiality, was proposed for enforcing access control in government and military applications. It supports mandatory access control by determining the access rights from the security levels associated with subjects and objects. It also supports discretionary access control by checking access rights from an access matrix. The Biba model, introduced in 1977, the Sutherland model, published in 1986, and the Brewer-Nash model, published in 1989, are concerned with integrity.

Source: ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 2: Access Control Systems and Methodology (page 11).

NEW QUESTION 173

- (Topic 1)

This is a common security issue that is extremely hard to control in large environments. It occurs when a user has more computer rights, permissions, and access than what is required for the tasks the user needs to fulfill. What best describes this scenario?

- A. Excessive Rights
- B. Excessive Access
- C. Excessive Permissions
- D. Excessive Privileges

Answer: D

Explanation:

Even thou all 4 terms are very close to each other, the best choice is Excessive Privileges which would include the other three choices presented.

Reference(s) used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 645.

and

NEW QUESTION 178

- (Topic 1)

Which of the following is NOT a compensating measure for access violations?

- A. Backups
- B. Business continuity planning
- C. Insurance
- D. Security awareness

Answer: D

Explanation:

Security awareness is a preventive measure, not a compensating measure for access violations.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 50).

NEW QUESTION 180

- (Topic 1)

Which of the following is the FIRST step in protecting data's confidentiality?

- A. Install a firewall
- B. Implement encryption
- C. Identify which information is sensitive
- D. Review all user access rights

Answer: C

Explanation:

In order to protect the confidentiality of the data. The following answers are incorrect because :

Install a firewall is incorrect as this would come after the information has been identified for sensitivity levels.

Implement encryption is also incorrect as this is one of the mechanisms to protect the data once it has been identified.

Review all user access rights is also incorrect as this is also a protection mechanism for the identified information.

Reference : Shon Harris AIO v3 , Chapter-4 : Access Control , Page : 126

NEW QUESTION 183

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 188

- (Topic 1)

The controls that usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists are associated with:

- A. Preventive/physical
- B. Detective/technical
- C. Detective/physical
- D. Detective/administrative

Answer: C

Explanation:

Detective/physical controls usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 190

- (Topic 1)

Which of the following is NOT part of the Kerberos authentication protocol?

- A. Symmetric key cryptography
- B. Authentication service (AS)
- C. Principals
- D. Public Key

Answer: D

Explanation:

There is no such component within Kerberos environment. Kerberos uses only symmetric encryption and does not make use of any public key component. The other answers are incorrect because :
Symmetric key cryptography is a part of Kerberos as the KDC holds all the users' and services' secret keys.
Authentication service (AS) : KDC (Key Distribution Center) provides an authentication service
Principals : Key Distribution Center provides services to principals , which can be users , applications or network services.
References: Shon Harris , AIO v3 , Chapter - 4: Access Control , Pages : 152-155.

NEW QUESTION 195

- (Topic 1)

The following is NOT a security characteristic we need to consider while choosing a biometric identification systems:

- A. data acquisition process
- B. cost
- C. enrollment process
- D. speed and user interface

Answer: B

Explanation:

Cost is a factor when considering Biometrics but it is not a security characteristic. All the other answers are incorrect because they are security characteristics related to Biometrics.
data acquisition process can cause a security concern because if the process is not fast and efficient it can discourage individuals from using the process.
enrollment process can cause a security concern because the enrollment process has to be quick and efficient. This process captures data for authentication.
speed and user interface can cause a security concern because this also impacts the users acceptance rate of biometrics. If they are not comfortable with the interface and speed they might sabotage the devices or otherwise attempt to circumvent them.
References:
OIG Access Control (Biometrics) (pgs 165-167)
From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Pages 5-6.
in process of correction

NEW QUESTION 200

- (Topic 1)

What is the main focus of the Bell-LaPadula security model?

- A. Accountability
- B. Integrity
- C. Confidentiality
- D. Availability

Answer: C

Explanation:

The Bell-LaPadula model is a formal model dealing with confidentiality. The Bell-LaPadula Model (abbreviated BLP) is a state machine model used for enforcing access control in government and military applications. It was developed by David Elliott Bell and Leonard J. LaPadula, subsequent to strong guidance from Roger R. Schell to formalize the U.S. Department of Defense (DoD) multilevel security (MLS) policy. The model is a formal state transition model of computer security policy that describes a set of access control rules which use security labels on objects and clearances for subjects. Security labels range from the most sensitive (e.g. "Top Secret"), down to the least sensitive (e.g., "Unclassified" or "Public").
The Bell-LaPadula model focuses on data confidentiality and controlled access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity. In this formal model, the entities in an information system are divided into subjects and objects. The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby inductively proving that the system satisfies the security objectives of the model. The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a computer network system. The transition from one state to another state is defined by transition functions. A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy. To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode. The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:
The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).
The -property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The -property is also known as the Confinement property.
The Discretionary Security Property - use of an access matrix to specify the discretionary access control.
The following are incorrect answers:
Accountability is incorrect. Accountability requires that actions be traceable to the user that performed them and is not addressed by the Bell-LaPadula model. Integrity is incorrect. Integrity is addressed in the Biba model rather than Bell-Lapadula. Availability is incorrect. Availability is concerned with assuring that data/services are available to authorized users as specified in service level objectives and is not addressed by the Bell-Lapadula model.
References: CBK, pp. 325-326
AIO3, pp. 279 - 284
AIOv4 Security Architecture and Design (pages 333 - 336) AIOv5 Security Architecture and Design (pages 336 - 338)
Wikipedia at https://en.wikipedia.org/wiki/Bell-La_Padula_model

NEW QUESTION 204

- (Topic 1)

What security model implies a central authority that define rules and sometimes global rules, dictating what subjects can have access to what objects?

- A. Flow Model
- B. Discretionary access control
- C. Mandatory access control
- D. Non-discretionary access control

Answer: D

Explanation:

As a security administrator you might configure user profiles so that users cannot change the system's time, alter system configuration files, access a command prompt, or install unapproved applications. This type of access control is referred to as nondiscretionary, meaning that access decisions are not made at the discretion of the user. Nondiscretionary access controls are put into place by an authoritative entity (usually a security administrator) with the goal of protecting the organization's most critical assets.

Non-discretionary access control is when a central authority determines what subjects can have access to what objects based on the organizational security policy. Centralized access control is not an existing security model.

Both, Rule Based Access Control (RuBAC or RBAC) and Role Based Access Controls (RBAC) falls into this category.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 221). McGraw- Hill. Kindle Edition.

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

NEW QUESTION 207

- (Topic 1)

What does it mean to say that sensitivity labels are "incomparable"?

- A. The number of classification in the two labels is different.
- B. Neither label contains all the classifications of the other.
- C. the number of categories in the two labels are different.
- D. Neither label contains all the categories of the other.

Answer: D

Explanation:

If a category does not exist then you cannot compare it. Incomparable is when you have two disjointed sensitivity labels, that is a category in one of the labels is not in the other label. "Because neither label contains all the categories of the other, the labels can't be compared. They're said to be incomparable"

COMPARABILITY:

The label:

TOP SECRET [VENUS ALPHA]

is "higher" than either of the labels:

SECRET [VENUS ALPHA] TOP SECRET [VENUS]

But you can't really say that the label:

TOP SECRET [VENUS]

is higher than the label:

SECRET [ALPHA]

Because neither label contains all the categories of the other, the labels can't be compared. They're said to be incomparable. In a mandatory access control system, you won't be allowed access to a file whose label is incomparable to your clearance.

The Multilevel Security policy uses an ordering relationship between labels known as the dominance relationship. Intuitively, we think of a label that dominates another as being "higher" than the other. Similarly, we think of a label that is dominated by another as being "lower" than the other. The dominance relationship is used to determine permitted operations and information flows.

DOMINANCE

The dominance relationship is determined by the ordering of the Sensitivity/Clearance component of the label and the intersection of the set of Compartments.

Sample Sensitivity/Clearance ordering are:

Top Secret > Secret > Confidential > Unclassified s3 > s2 > s1 > s0

Formally, for label one to dominate label 2 both of the following must be true: The sensitivity/clearance of label one must be greater than or equal to the sensitivity/clearance of label two.

The intersection of the compartments of label one and label two must equal the compartments of label two.

Additionally:

Two labels are said to be equal if their sensitivity/clearance and set of compartments are exactly equal. Note that dominance includes equality.

One label is said to strictly dominate the other if it dominates the other but is not equal to the other.

Two labels are said to be incomparable if each label has at least one compartment that is not included in the other's set of compartments.

The dominance relationship will produce a partial ordering over all possible MLS labels, resulting in what is known as the MLS Security Lattice.

The following answers are incorrect:

The number of classification in the two labels is different. Is incorrect because the categories are what is being compared, not the classifications.

Neither label contains all the classifications of the other. Is incorrect because the categories are what is being compared, not the classifications.

the number of categories in the two labels is different. Is incorrect because it is possible a category exists more than once in one sensitivity label and does exist in the other so they would be comparable.

Reference(s) used for this question:

OReilly - Computer Systems and Access Control (Chapter 3) <http://www.oreilly.com/catalog/csb/chapter/ch03.html>

and http://rubix.com/cms/mls_dom

NEW QUESTION 210

- (Topic 1)

Kerberos is vulnerable to replay in which of the following circumstances?

- A. When a private key is compromised within an allotted time window.
- B. When a public key is compromised within an allotted time window.
- C. When a ticket is compromised within an allotted time window.
- D. When the KSD is compromised within an allotted time window.

Answer: C

Explanation:

Replay can be accomplished on Kerberos if the compromised tickets are used within an allotted time window.

The security depends on careful implementation: enforcing limited lifetimes for authentication credentials minimizes the threat of of replayed credentials, the KDC must be physically secured, and it should be hardened, not permitting any non-kerberos activities.

Reference:

Official ISC2 Guide to the CISSP, 2007 Edition, page 184 also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

NEW QUESTION 211

- (Topic 1)

In the context of access control, locks, gates, guards are examples of which of the following?

- A. Administrative controls
- B. Technical controls
- C. Physical controls
- D. Logical controls

Answer: C

Explanation:

Administrative, technical and physical controls are categories of access control mechanisms.

Logical and Technical controls are synonymous. So both of them could be eliminated as possible choices.

Physical Controls: These are controls to protect the organization's people and physical environment, such as locks, gates, and guards. Physical controls may be called "operational controls" in some contexts.

Physical security covers a broad spectrum of controls to protect the physical assets (primarily the people) in an organization. Physical Controls are sometimes referred to as "operational" controls in some risk management frameworks. These controls range from doors, locks, and windows to environment controls, construction standards, and guards. Typically, physical security is based on the notion of establishing security zones or concentric areas within a facility that require increased security as you get closer to the

valuable assets inside the facility. Security zones are the physical representation of the defense-in-depth principle discussed earlier in this chapter. Typically, security zones are associated with rooms, offices, floors, or smaller elements, such as a cabinet or storage locker. The design of the physical security controls within the facility must take into account the protection of the asset as well as the individuals working in that area.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1301-1303). Auerbach Publications. Kindle Edition.

and

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 1312-1318). Auerbach Publications. Kindle Edition.

NEW QUESTION 212

- (Topic 1)

Which of the following protection devices is used for spot protection within a few inches of the object, rather than for overall room security monitoring?

- A. Wave pattern motion detectors
- B. Capacitance detectors
- C. Field-powered devices
- D. Audio detectors

Answer: B

Explanation:

Capacitance detectors monitor an electrical field surrounding the object being monitored. They are used for spot protection within a few inches of the object, rather than for overall room security monitoring used by wave detectors. Penetration of this field changes the electrical capacitance of the field enough to generate and alarm. Wave pattern motion detectors generate a frequency wave pattern and send an alarm if the pattern is disturbed as it is reflected back to its receiver. Field-powered devices are a type of personnel access control devices. Audio detectors simply monitor a room for any abnormal sound wave generation and trigger an alarm.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 344).

NEW QUESTION 213

- (Topic 1)

Access Control techniques do not include which of the following?

- A. Rule-Based Access Controls
- B. Role-Based Access Control
- C. Mandatory Access Control
- D. Random Number Based Access Control

Answer: D

Explanation:

Access Control Techniques Discretionary Access Control

Mandatory Access Control Lattice Based Access Control Rule-Based Access Control Role-Based Access Control

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 13.

NEW QUESTION 215

- (Topic 1)

Which of the following biometric devices offers the LOWEST CER?

- A. Keystroke dynamics
- B. Voice verification
- C. Iris scan
- D. Fingerprint

Answer: C

Explanation:

From most effective (lowest CER) to least effective (highest CER) are: Iris scan, fingerprint, voice verification, keystroke dynamics.

Reference : Shon Harris Aio v3 , Chapter-4 : Access Control , Page : 131

Also see: http://www.sans.org/reading_room/whitepapers/authentication/biometric-selection-body-parts-online_139

NEW QUESTION 219

- (Topic 1)

Which of the following division is defined in the TCSEC (Orange Book) as minimal protection?

- A. Division D
- B. Division C
- C. Division B
- D. Division A

Answer: A

Explanation:

The criteria are divided into four divisions: D, C, B, and A ordered in a hierarchical manner with the highest division (A) being reserved for systems providing the most comprehensive security.

Each division represents a major improvement in the overall confidence one can place in the system for the protection of sensitive information.

Within divisions C and B there are a number of subdivisions known as classes. The classes are also ordered in a hierarchical manner with systems representative of division C and lower classes of division B being characterized by the set of computer security mechanisms that they possess.

Assurance of correct and complete design and implementation for these systems is gained mostly through testing of the security- relevant portions of the system.

The security-relevant portions of a system are referred to throughout this document as the Trusted Computing Base (TCB).

Systems representative of higher classes in division B and division A derive their security attributes more from their design and implementation structure.

Increased assurance that the required features are operative, correct, and tamperproof under all circumstances is gained through progressively more rigorous analysis during the design process.

TCSEC provides a classification system that is divided into hierarchical divisions of assurance levels:

Division D - minimal security Division C - discretionary protection Division B - mandatory protection Division A - verified protection

Reference: page 358 AIO V.5 Shon Harris

also

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 197.

Also:

THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt>

NEW QUESTION 223

- (Topic 1)

A confidential number used as an authentication factor to verify a user's identity is called a:

- A. PIN
- B. User ID
- C. Password
- D. Challenge

Answer: A

Explanation:

PIN Stands for Personal Identification Number, as the name states it is a combination of numbers.

The following answers are incorrect:

User ID This is incorrect because a Userid is not required to be a number and a Userid is only used to establish identity not verify it.

Password. This is incorrect because a password is not required to be a number, it could be any combination of characters.

Challenge. This is incorrect because a challenge is not defined as a number, it could be anything.

NEW QUESTION 228

- (Topic 1)

Which of the following is the LEAST user accepted biometric device?

- A. Fingerprint
- B. Iris scan
- C. Retina scan
- D. Voice verification

Answer: C

Explanation:

The biometric device that is least user accepted is the retina scan, where a system scans the blood-vessel pattern on the backside of the eyeball. When using this device, an individual has to place their eye up to a device, and may require a puff of air to be blown into the eye. The iris scan only needs for an individual to glance at a camera that could be placed above a door.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (page 131).

NEW QUESTION 231

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 232

- (Topic 1)

Which of the following access control models introduces user security clearance and data classification?

- A. Role-based access control
- B. Discretionary access control
- C. Non-discretionary access control
- D. Mandatory access control

Answer: D

Explanation:

The mandatory access control model is based on a security label system. Users are given a security clearance and data is classified. The classification is stored in the security labels of the resources. Classification labels specify the level of trust a user must have to access a certain file.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (Page 154).

NEW QUESTION 233

- (Topic 1)

What Orange Book security rating is reserved for systems that have been evaluated but fail to meet the criteria and requirements of the higher divisions?

- A. A
- B. D
- C. E
- D. F

Answer: B

Explanation:

D or "minimal protection" is reserved for systems that were evaluated under the TCSEC but did not meet the requirements for a higher trust level.

A is incorrect. A or "Verified Protection" is the highest trust level under the TCSEC. E is incorrect. The trust levels are A - D so "E" is not a valid trust level.

F is incorrect. The trust levels are A - D so "F" is not a valid trust level.

CBK, pp. 329 - 330

AIO3, pp. 302 - 306

NEW QUESTION 237

- (Topic 1)

Which of the following is NOT true of the Kerberos protocol?

- A. Only a single login is required per session.
- B. The initial authentication steps are done using public key algorithm.
- C. The KDC is aware of all systems in the network and is trusted by all of them
- D. It performs mutual authentication

Answer: B

Explanation:

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. It has the following characteristics:

It is secure: it never sends a password unless it is encrypted.

Only a single login is required per session. Credentials defined at login are then passed between resources without the need for additional logins.


The concept depends on a trusted third party – a Key Distribution Center (KDC). The KDC is aware of all systems in the network and is trusted by all of them.

It performs mutual authentication, where a client proves its identity to a server and a server proves its identity to the client.

Kerberos introduces the concept of a Ticket-Granting Server/Service (TGS). A client that wishes to use a service has to receive a ticket from the TGS – a ticket is a time-limited

cryptographic message – giving it access to the server. Kerberos also requires an Authentication Server (AS) to verify clients. The two servers combined make up a KDC.

Within the Windows environment, Active Directory performs the functions of the KDC. The following figure shows the sequence of events required for a client to gain access to a service using Kerberos authentication. Each step is shown with the Kerberos message associated with it, as defined in RFC 4120 "The Kerberos Network Authorization Service (V5)".

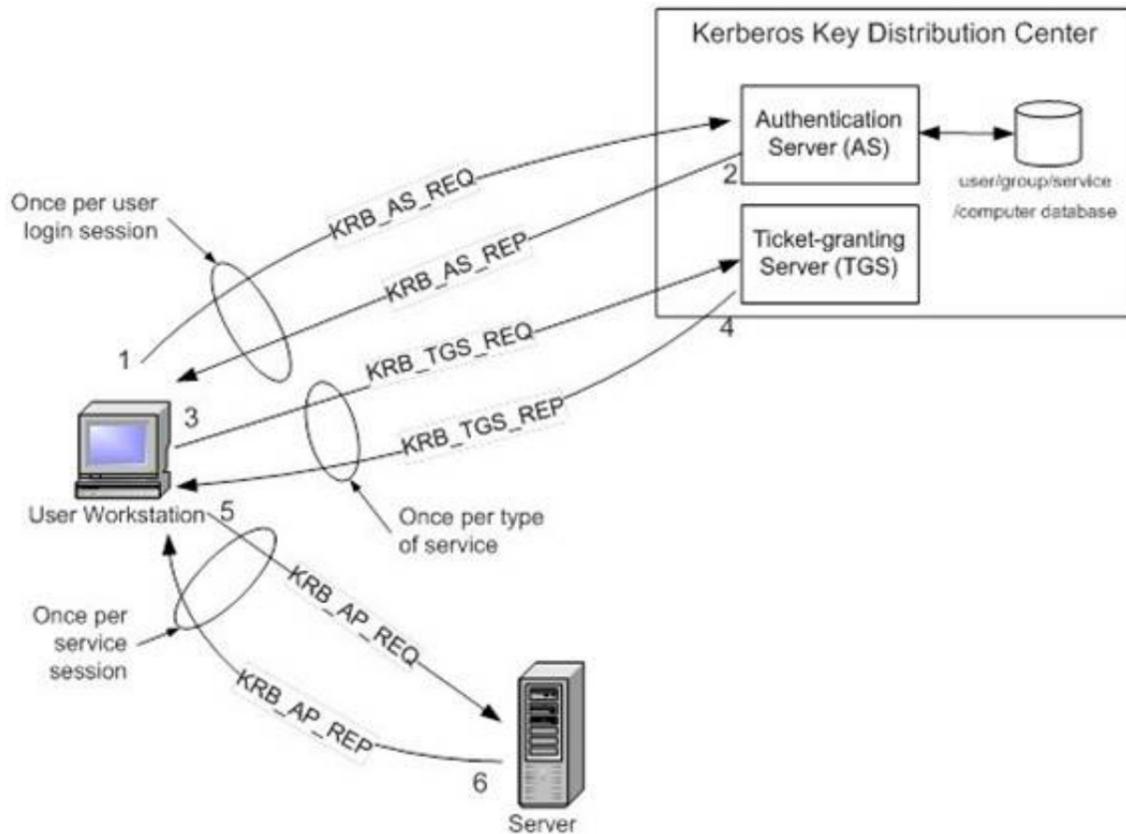

C:\Users\MCS\Desktop\1.jpg Kerberos Authentication Step by Step

Step 1: The user logs on to the workstation and requests service on the host. The workstation sends a message to the Authorization Server requesting a ticket granting ticket (TGT).

Step 2: The Authorization Server verifies the user's access rights in the user database and creates a TGT and session key. The Authorization Server encrypts the results using a key derived from the user's password and sends a message back to the user workstation.

The workstation prompts the user for a password and uses the password to decrypt the incoming message. When decryption succeeds, the user will be able to use the TGT to request a service ticket.

Step 3: When the user wants access to a service, the workstation client application sends a request to the Ticket Granting Service containing the client name, realm name and a timestamp. The user proves his identity by sending an authenticator encrypted with the session key received in Step 2.

Step 4: The TGS decrypts the ticket and authenticator, verifies the request, and creates a ticket for the requested server. The ticket contains the client name and optionally the client IP address. It also contains the realm name and ticket lifespan. The TGS returns the ticket to the user workstation. The returned message contains two copies of a server session key

– one encrypted with the client password, and one encrypted by the service password.

Step 5: The client application now sends a service request to the server containing the ticket received in Step 4 and an authenticator. The service authenticates the request by decrypting the session key. The server verifies that the ticket and authenticator match, and then grants access to the service. This step as described does not include the authorization performed by the Intel AMT device, as described later.

Step 6: If mutual authentication is required, then the server will reply with a server authentication message.

The Kerberos server knows "secrets" (encrypted passwords) for all clients and servers under its control, or it is in contact with other secure servers that have this information. These "secrets" are used to encrypt all of the messages shown in the figure above.

To prevent "replay attacks," Kerberos uses timestamps as part of its protocol definition. For timestamps to work properly, the clocks of the client and the server need to be in synch as much as possible. In other words, both computers need to be set to the same time and date. Since the clocks of two computers are often out of synch, administrators can establish a policy to establish the maximum acceptable difference to Kerberos between a client's clock and server's clock. If the difference between a client's clock and the server's clock is less than the maximum time difference specified in this policy, any timestamp used in a session between the two computers will be considered authentic. The maximum difference is usually set to five minutes.

Note that if a client application wishes to use a service that is "Kerberized" (the service is configured to perform Kerberos authentication), the client must also be Kerberized so that it expects to support the necessary message responses.

For more information about Kerberos, see <http://web.mit.edu/kerberos/www/>.

References:

Introduction to Kerberos Authentication from Intel
and

<http://www.zeroshell.net/eng/kerberos/Kerberos-definitions/#1.3.5.3> and

<http://www.ietf.org/rfc/rfc4120.txt>

NEW QUESTION 238

.....

Relate Links

100% Pass Your SSCP Exam with ExamBible Prep Materials

<https://www.exambible.com/SSCP-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>