



Google

Exam Questions Associate-Cloud-Engineer

Google Cloud Certified - Associate Cloud Engineer

NEW QUESTION 1

Your company runs one batch process in an on-premises server that takes around 30 hours to complete. The task runs monthly, can be performed offline, and must be restarted if interrupted. You want to migrate this workload to the cloud while minimizing cost. What should you do?

- A. Migrate the workload to a Compute Engine Preemptible VM.
- B. Migrate the workload to a Google Kubernetes Engine cluster with Preemptible nodes.
- C. Migrate the workload to a Compute Engine V
- D. Start and stop the instance as needed.
- E. Create an Instance Template with Preemptible VMs O
- F. Create a Managed Instance Group from the template and adjust Target CPU Utilization
- G. Migrate the workload.

Answer: B

NEW QUESTION 2

Your organization uses G Suite for communication and collaboration. All users in your organization have a G Suite account. You want to grant some G Suite users access to your Cloud Platform project. What should you do?

- A. Enable Cloud Identity in the GCP Console for your domain.
- B. Grant them the required IAM roles using their G Suite email address.
- C. Create a CSV sheet with all users' email addresses
- D. Use the gcloud command line tool to convert them into Google Cloud Platform accounts.
- E. In the G Suite console, add the users to a special group called cloud-console-users@yourdomain.com. Rely on the default behavior of the Cloud Platform to grant users access if they are members of this group.

Answer: B

NEW QUESTION 3

Your managed instance group raised an alert stating that new instance creation has failed to create new instances. You need to maintain the number of running instances specified by the template to be able to process expected application traffic. What should you do?

- A. Create an instance template that contains valid syntax which will be used by the instance group
- B. Delete any persistent disks with the same name as instance names.
- C. Create an instance template that contains valid syntax that will be used by the instance group
- D. Verify that the instance name and persistent disk name values are not the same in the template.
- E. Verify that the instance template being used by the instance group contains valid syntax
- F. Delete any persistent disks with the same name as instance name
- G. Set the disks.autoDelete property to true in the instance template.
- H. Delete the current instance template and replace it with a new instance template
- I. Verify that the instance name and persistent disk name values are not the same in the template
- J. Set the disks.autoDelete property to true in the instance template.

Answer: C

NEW QUESTION 4

Your customer has implemented a solution that uses Cloud Spanner and notices some read latency-related performance issues on one table. This table is accessed only by their users using a primary key. The table schema is shown below.

```
CREATE TABLE Persons (  
    person_id INT64 NOT NULL,    // sequential number based on number of registration  
    account_creation_date DATE, // system date  
    birthdate DATE,             // customer birthdate  
    firstname STRING (255),     // first name  
    lastname STRING (255),      // last name  
    profile_picture BYTES (255) // profile picture  
) PRIMARY KEY (person_id)
```

You want to resolve the issue. What should you do?

- A. Remove the profile_picture field from the table.
- B. Add a secondary index on the person_id column.
- C. Change the primary key to not have monotonically increasing values.
- D. Create a secondary index using the following Data Definition Language (DDL):

```
CREATE INDEX person_id_ix
ON Persons (
    person_id,
    firstname,
    lastname
) STORING (
    profile_picture
)
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 5

You are developing a new application and are looking for a Jenkins installation to build and deploy your source code. You want to automate the installation as quickly and easily as possible. What should you do?

- A. Deploy Jenkins through the Google Cloud Marketplace.
- B. Create a new Compute Engine instance.
- C. Run the Jenkins executable.
- D. Create a new Kubernetes Engine cluster.
- E. Create a deployment for the Jenkins image.
- F. Create an instance template with the Jenkins executable.
- G. Create a managed instance group with this template.

Answer: A

NEW QUESTION 6

Your company uses Cloud Storage to store application backup files for disaster recovery purposes. You want to follow Google's recommended practices. Which storage option should you use?

- A. Multi-Regional Storage
- B. Regional Storage
- C. Nearline Storage
- D. Coldline Storage

Answer: D

NEW QUESTION 7

You are building a new version of an application hosted in an App Engine environment. You want to test the new version with 1% of users before you completely switch your application over to the new version. What should you do?

- A. Deploy a new version of your application in Google Kubernetes Engine instead of App Engine and then use GCP Console to split traffic.
- B. Deploy a new version of your application in a Compute Engine instance instead of App Engine and then use GCP Console to split traffic.
- C. Deploy a new version as a separate app in App Engine.
- D. Then configure App Engine using GCP Console to split traffic between the two apps.
- E. Deploy a new version of your application in App Engine.
- F. Then go to App Engine settings in GCP Console and split traffic between the current version and newly deployed versions accordingly.

Answer: A

NEW QUESTION 8

You are working with a user to set up an application in a new VPC behind a firewall. The user is concerned about data egress. You want to configure the fewest open egress ports. What should you do?

- A. Set up a low-priority (65534) rule that blocks all egress and a high-priority rule (1000) that allows only the appropriate ports.
- B. Set up a high-priority (1000) rule that pairs both ingress and egress ports.
- C. Set up a high-priority (1000) rule that blocks all egress and a low-priority (65534) rule that allows only the appropriate ports.
- D. Set up a high-priority (1000) rule to allow the appropriate ports.

Answer: C

NEW QUESTION 9

You have a single binary application that you want to run on Google Cloud Platform. You decided to automatically scale the application based on underlying

infrastructure CPU usage. Your organizational policies require you to use virtual machines directly. You need to ensure that the application scaling is operationally efficient and completed as quickly as possible. What should you do?

- A. Create a Google Kubernetes Engine cluster, and use horizontal pod autoscaling to scale the application.
- B. Create an instance template, and use the template in a managed instance group with autoscaling configured.
- C. Create an instance template, and use the template in a managed instance group that scales up and down based on the time of day.
- D. Use a set of third-party tools to build automation around scaling the application up and down, based on Stackdriver CPU usage monitoring.

Answer: A

NEW QUESTION 10

You have a development project with appropriate IAM roles defined. You are creating a production project and want to have the same IAM roles on the new project, using the fewest possible steps. What should you do?

- A. Use `gcloud iam roles copy` and specify the production project as the destination project.
- B. Use `gcloud iam roles copy` and specify your organization as the destination organization.
- C. In the Google Cloud Platform Console, use the 'create role from role' functionality.
- D. In the Google Cloud Platform Console, use the 'create role' functionality and select all applicable permissions.

Answer: B

NEW QUESTION 10

Your company publishes large files on an Apache web server that runs on a Compute Engine instance. The Apache web server is not the only application running in the project. You want to receive an email when the egress network costs for the server exceed 100 dollars for the current month as measured by Google Cloud Platform (GCP). What should you do?

- A. Set up a budget alert on the project with an amount of 100 dollars, a threshold of 100%, and notification type of "email."
- B. Set up a budget alert on the billing account with an amount of 100 dollars, a threshold of 100%, and notification type of "email."
- C. Export the billing data to BigQuery
- D. Create a Cloud Function that uses BigQuery to sum the egress network costs of the exported billing data for the Apache web server for the current month and sends an email if it is over 100 dollar
- E. Schedule the Cloud Function using Cloud Scheduler to run hourly.
- F. Use the Stackdriver Logging Agent to export the Apache web server logs to Stackdriver Logging. Create a Cloud Function that uses BigQuery to parse the HTTP response log data in Stackdriver for the current month and sends an email if the size of all HTTP responses, multiplied by current GCP egress prices, totals over 100 dollar
- G. Schedule the Cloud Function using Cloud Scheduler to run hourly.

Answer: D

NEW QUESTION 13

You have an instance group that you want to load balance. You want the load balancer to terminate the client SSL session. The instance group is used to serve a public web application over HTTPS. You want to follow Google-recommended practices. What should you do?

- A. Configure an HTTP(S) load balancer.
- B. Configure an internal TCP load balancer.
- C. Configure an external SSL proxy load balancer.
- D. Configure an external TCP proxy load balancer.

Answer: A

NEW QUESTION 18

You need to set up permissions for a set of Compute Engine instances to enable them to write data into a particular Cloud Storage bucket. You want to follow Google-recommended practices. What should you do?

- A. Create a service account with an access scope
- B. Use the access scope 'https://www.googleapis.com/auth/devstorage.write_only'.
- C. Create a service account with an access scop
- D. Use the access scope 'https://www.googleapis.com/auth/cloud-platform'.
- E. Create a service account and add it to the IAM role 'storage.objectCreator' for that bucket.
- F. Create a service account and add it to the IAM role 'storage.objectAdmin' for that bucket.

Answer: B

NEW QUESTION 21

You need to manage a third-party application that will run on a Compute Engine instance. Other Compute Engine instances are already running with default configuration. Application installation files are hosted on Cloud Storage. You need to access these files from the new instance without allowing other virtual machines (VMs) to access these files. What should you do?

- A. Create the instance with the default Compute Engine service account Grant the service account permissions on Cloud Storage.
- B. Create the instance with the default Compute Engine service account Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.
- C. Create a new service account and assign this service account to the new instance Grant the service account permissions on Cloud Storage.
- D. Create a new service account and assign this service account to the new instance Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.

Answer: C

NEW QUESTION 22

You have a website hosted on App Engine standard environment. You want 1% of your users to see a new test version of the website. You want to minimize complexity. What should you do?

- A. Deploy the new version in the same application and use the --migrate option.
- B. Deploy the new version in the same application and use the --splits option to give a weight of 99 to the current version and a weight of 1 to the new version.
- C. Create a new App Engine application in the same project
- D. Deploy the new version in that application. Use the App Engine library to proxy 1% of the requests to the new version.
- E. Create a new App Engine application in the same project
- F. Deploy the new version in that application. Configure your network load balancer to send 1% of the traffic to that new application.

Answer: B

NEW QUESTION 27

Your company has an existing GCP organization with hundreds of projects and a billing account. Your company recently acquired another company that also has hundreds of projects and its own billing account. You would like to consolidate all GCP costs of both GCP organizations onto a single invoice. You would like to consolidate all costs as of tomorrow. What should you do?

- A. Link the acquired company's projects to your company's billing account.
- B. Configure the acquired company's billing account and your company's billing account to export the billing data into the same BigQuery dataset.
- C. Migrate the acquired company's projects into your company's GCP organization
- D. Link the migrated projects to your company's billing account.
- E. Create a new GCP organization and a new billing account
- F. Migrate the acquired company's projects and your company's projects into the new GCP organization and link the projects to the new billing account.

Answer: D

NEW QUESTION 31

You have successfully created a development environment in a project for an application. This application uses Compute Engine and Cloud SQL. Now, you need to create a production environment for this application.

The security team has forbidden the existence of network routes between these 2 environments, and asks you to follow Google-recommended practices. What should you do?

- A. Create a new project, enable the Compute Engine and Cloud SQL APIs in that project, and replicate the setup you have created in the development environment.
- B. Create a new production subnet in the existing VPC and a new production Cloud SQL instance in your existing project, and deploy your application using those resources.
- C. Create a new project, modify your existing VPC to be a Shared VPC, share that VPC with your new project, and replicate the setup you have in the development environment in that new project, in the Shared VPC.
- D. Ask the security team to grant you the Project Editor role in an existing production project used by another division of your company
- E. Once they grant you that role, replicate the setup you have in the development environment in that project.

Answer: A

NEW QUESTION 32

You will have several applications running on different Compute Engine instances in the same project. You want to specify at a more granular level the service account each instance uses when calling Google Cloud APIs. What should you do?

- A. When creating the instances, specify a Service Account for each instance
- B. When creating the instances, assign the name of each Service Account as instance metadata
- C. After starting the instances, use `gcloud compute instances update` to specify a Service Account for each instance
- D. After starting the instances, use `gcloud compute instances update` to assign the name of the relevant Service Account as instance metadata

Answer: C

NEW QUESTION 35

You have a batch workload that runs every night and uses a large number of virtual machines (VMs). It is fault-tolerant and can tolerate some of the VMs being terminated. The current cost of VMs is too high. What should you do?

- A. Run a test using simulated maintenance event
- B. If the test is successful, use preemptible N1 Standard VMs when running future jobs.
- C. Run a test using simulated maintenance event
- D. If the test is successful, use N1 Standard VMs when running future jobs.
- E. Run a test using a managed instance group
- F. If the test is successful, use N1 Standard VMs in the managed instance group when running future jobs.
- G. Run a test using N1 standard VMs instead of N2. If the test is successful, use N1 Standard VMs when running future jobs.

Answer: B

NEW QUESTION 37

You are using Container Registry to centrally store your company's container images in a separate project. In another project, you want to create a Google Kubernetes Engine (GKE) cluster. You want to ensure that Kubernetes can download images from Container Registry. What should you do?

- A. In the project where the images are stored, grant the Storage Object Viewer IAM role to the service account used by the Kubernetes nodes.
- B. When you create the GKE cluster, choose the Allow full access to all Cloud APIs option under 'Access scopes'.
- C. Create a service account, and give it access to Cloud Storage
- D. Create a P12 key for this service account and use it as an imagePullSecrets in Kubernetes.
- E. Configure the ACLs on each image in Cloud Storage to give read-only access to the default Compute Engine service account.

Answer: B

NEW QUESTION 41

You have one GCP account running in your default region and zone and another account running in a non-default region and zone. You want to start a new Compute Engine instance in these two Google Cloud Platform accounts using the command line interface. What should you do?

- A. Create two configurations using gcloud config configurations create [NAME]. Run gcloud config configurations activate [NAME] to switch between accounts when running the commands to start the Compute Engine instances.
- B. Create two configurations using gcloud config configurations create [NAME]. Run gcloud configurations list to start the Compute Engine instances.
- C. Activate two configurations using gcloud configurations activate [NAME]. Run gcloud config list to start the Compute Engine instances.
- D. Activate two configurations using gcloud configurations activate [NAME]. Run gcloud configurations list to start the Compute Engine instances.

Answer: C

NEW QUESTION 43

You need a dynamic way of provisioning VMs on Compute Engine. The exact specifications will be in a dedicated configuration file. You want to follow Google's recommended practices. Which method should you use?

- A. Deployment Manager
- B. Cloud Composer
- C. Managed Instance Group
- D. Unmanaged Instance Group

Answer: C

NEW QUESTION 45

You need to provide a cost estimate for a Kubernetes cluster using the GCP pricing calculator for Kubernetes. Your workload requires high IOPs, and you will also be using disk snapshots. You start by entering the number of nodes, average hours, and average days. What should you do next?

- A. Fill in local SS
- B. Fill in persistent disk storage and snapshot storage.
- C. Fill in local SS
- D. Add estimated cost for cluster management.
- E. Select Add GPU
- F. Fill in persistent disk storage and snapshot storage.
- G. Select Add GPU
- H. Add estimated cost for cluster management.

Answer: C

NEW QUESTION 48

You built an application on your development laptop that uses Google Cloud services. Your application uses Application Default Credentials for authentication and works fine on your development laptop. You want to migrate this application to a Compute Engine virtual machine (VM) and set up authentication using Google-recommended practices and minimal changes. What should you do?

- A. Assign appropriate access for Google services to the service account used by the Compute Engine VM.
- B. Create a service account with appropriate access for Google services, and configure the application to use this account.
- C. Store credentials for service accounts with appropriate access for Google services in a config file, and deploy this config file with your application.
- D. Store credentials for your user account with appropriate access for Google services in a config file, and deploy this config file with your application.

Answer: B

NEW QUESTION 51

You have a Linux VM that must connect to Cloud SQL. You created a service account with the appropriate access rights. You want to make sure that the VM uses this service account instead of the default Compute Engine service account. What should you do?

- A. When creating the VM via the web console, specify the service account under the 'Identity and API Access' section.
- B. Download a JSON Private Key for the service account
- C. On the Project Metadata, add that JSON as the value for the key compute-engine-service-account.
- D. Download a JSON Private Key for the service account
- E. On the Custom Metadata of the VM, add that JSON as the value for the key compute-engine-service-account.
- F. Download a JSON Private Key for the service account
- G. After creating the VM, ssh into the VM and save the JSON under ~/.gcloud/compute-engine-service-account.json.

Answer: A

NEW QUESTION 53

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the company
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to access

- F. Copy the object to that bucket
- G. Delete the bucket after four hours have passed.

Answer: A

NEW QUESTION 58

You deployed an LDAP server on Compute Engine that is reachable via TLS through port 636 using UDP. You want to make sure it is reachable by clients over that port. What should you do?

- A. Add the network tag allow-udp-636 to the VM instance running the LDAP server.
- B. Create a route called allow-udp-636 and set the next hop to be the VM instance running the LDAP server.
- C. Add a network tag of your choice to the instance
- D. Create a firewall rule to allow ingress on UDP port 636 for that network tag.
- E. Add a network tag of your choice to the instance running the LDAP server
- F. Create a firewall rule to allow egress on UDP port 636 for that network tag.

Answer: C

NEW QUESTION 59

You need to verify that a Google Cloud Platform service account was created at a particular time. What should you do?

- A. Filter the Activity log to view the Configuration category
- B. Filter the Resource type to Service Account.
- C. Filter the Activity log to view the Configuration category
- D. Filter the Resource type to Google Project.
- E. Filter the Activity log to view the Data Access category
- F. Filter the Resource type to Service Account.
- G. Filter the Activity log to view the Data Access category
- H. Filter the Resource type to Google Project.

Answer: D

NEW QUESTION 64

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network tag
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

Answer: B

NEW QUESTION 66

You need to assign a Cloud Identity and Access Management (Cloud IAM) role to an external auditor. The auditor needs to have permissions to review your Google Cloud Platform (GCP) Audit Logs and also to review your Data Access logs. What should you do?

- A. Assign the auditor the IAM role roles/logging.privateLogView
- B. Perform the export of logs to Cloud Storage.
- C. Assign the auditor the IAM role roles/logging.privateLogView
- D. Direct the auditor to also review the logs for changes to Cloud IAM policy.
- E. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permission
- F. Perform the export of logs to Cloud Storage.
- G. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permission
- H. Direct the auditor to also review the logs for changes to Cloud IAM policy.

Answer: C

NEW QUESTION 68

You want to configure autohealing for network load balancing for a group of Compute Engine instances that run in multiple zones, using the fewest possible steps. You need to configure re-creation of VMs if they are unresponsive after 3 attempts of 10 seconds each. What should you do?

- A. Create an HTTP load balancer with a backend configuration that references an existing instance group. Set the health check to healthy (HTTP).
- B. Create an HTTP load balancer with a backend configuration that references an existing instance group. Define a balancing mode and set the maximum RPS to 10.
- C. Create a managed instance group
- D. Set the Autohealing health check to healthy (HTTP).
- E. Create a managed instance group
- F. Verify that the autoscaling setting is on.

Answer: A

NEW QUESTION 70

You are migrating a production-critical on-premises application that requires 96 vCPUs to perform its task. You want to make sure the application runs in a similar environment on GCP. What should you do?

- A. When creating the VM, use machine type n1-standard-96.
- B. When creating the VM, use Intel Skylake as the CPU platform.
- C. Create the VM using Compute Engine default setting
- D. Use gcloud to modify the running instance to have 96 vCPUs.
- E. Start the VM using Compute Engine default settings, and adjust as you go based on Rightsizing Recommendations.

Answer: C

NEW QUESTION 74

You have a workload running on Compute Engine that is critical to your business. You want to ensure that the data on the boot disk of this workload is backed up regularly. You need to be able to restore a backup as quickly as possible in case of disaster. You also want older backups to be cleaned automatically to save on cost. You want to follow Google-recommended practices. What should you do?

- A. Create a Cloud Function to create an instance template.
- B. Create a snapshot schedule for the disk using the desired interval.
- C. Create a cron job to create a new disk from the disk using gcloud.
- D. Create a Cloud Task to create an image and export it to Cloud Storage.

Answer: B

NEW QUESTION 79

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster's API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster's definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

Answer: C

NEW QUESTION 81

You need to deploy an application, which is packaged in a container image, in a new project. The application exposes an HTTP endpoint and receives very few requests per day. You want to minimize costs. What should you do?

- A. Deploy the container on Cloud Run.
- B. Deploy the container on Cloud Run on GKE.
- C. Deploy the container on App Engine Flexible.
- D. Deploy the container on Google Kubernetes Engine, with cluster autoscaling and horizontal pod autoscaling enabled.

Answer: A

NEW QUESTION 83

Your organization has three existing Google Cloud projects. You need to bill the Marketing department for only their Google Cloud services for a new initiative within their group. What should you do?

- A. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud Project for the Marketing department* 2. Link the new project to a Marketing Billing Account
- B. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key-value project labels to department marketing for all services in this project
- C. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department 3. Link the new project to a Marketing Billing Account.
- D. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key value project labels to department marketing for all services in this project

Answer: A

NEW QUESTION 86

You are developing a new web application that will be deployed on Google Cloud Platform. As part of your release cycle, you want to test updates to your application on a small portion of real user traffic. The majority of the users should still be directed towards a stable version of your application. What should you do?

- A. Deploy the application on App Engine For each update, create a new version of the same service Configure traffic splitting to send a small percentage of traffic to the new version
- B. Deploy the application on App Engine For each update, create a new service Configure traffic splitting to send a small percentage of traffic to the new service.
- C. Deploy the application on Kubernetes Engine For a new release, update the deployment to use the new version
- D. Deploy the application on Kubernetes Engine For a new release, create a new deployment for the new version Update the service to use the new deployment.

Answer: A

NEW QUESTION 91

Every employee of your company has a Google account. Your operational team needs to manage a large number of instances on Compute Engine. Each member of this team needs only administrative access to the servers. Your security team wants to ensure that the deployment of credentials is operationally efficient and must be able to determine who accessed a given instance. What should you do?

- A. Generate a new SSH key pair
- B. Give the private key to each member of your team

- C. Configure the public key in the metadata of each instance.
- D. Ask each member of the team to generate a new SSH key pair and to send you their public key.
- E. Use a configuration management tool to deploy those keys on each instance.
- F. Ask each member of the team to generate a new SSH key pair and to add the public key to their Google account.
- G. Grant the “compute.osAdminLogin” role to the Google group corresponding to this team.
- H. Generate a new SSH key pair.
- I. Give the private key to each member of your team.
- J. Configure the public key as a project-wide public SSH key in your Cloud Platform project and allow project-wide public SSH keys on each instance.

Answer: C

Explanation:

<https://cloud.google.com/compute/docs/instances/managing-instance-access>

NEW QUESTION 94

You want to deploy an application on Cloud Run that processes messages from a Cloud Pub/Sub topic. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a Cloud Function that uses a Cloud Pub/Sub trigger on that topic.2. Call your application on Cloud Run from the Cloud Function for every message.
- B. 1. Grant the Pub/Sub Subscriber role to the service account used by Cloud Run.2. Create a Cloud Pub/Sub subscription for that topic.3. Make your application pull messages from that subscription.
- C. 1. Create a service account.2. Give the Cloud Run Invoker role to that service account for your Cloud Run application.3. Create a Cloud Pub/Sub subscription that uses that service account and uses your Cloud Run application as the push endpoint.
- D. 1. Deploy your application on Cloud Run on GKE with the connectivity set to Internal.2. Create a Cloud Pub/Sub subscription for that topic.3. In the same Google Kubernetes Engine cluster as your application, deploy a container that takes the messages and sends them to your application.

Answer: D

NEW QUESTION 95

You need to select and configure compute resources for a set of batch processing jobs. These jobs take around 2 hours to complete and are run nightly. You want to minimize service costs. What should you do?

- A. Select Google Kubernetes Engine
- B. Use a single-node cluster with a small instance type.
- C. Select Google Kubernetes Engine
- D. Use a three-node cluster with micro instance types.
- E. Select Compute Engine
- F. Use preemptible VM instances of the appropriate standard machine type.
- G. Select Compute Engine
- H. Use VM instance types that support micro bursting.

Answer: C

NEW QUESTION 97

You are given a project with a single virtual private cloud (VPC) and a single subnetwork in the us-central1 region. There is a Compute Engine instance hosting an application in this subnetwork. You need to deploy a new instance in the same project in the europe-west1 region. This new instance needs access to the application. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a subnetwork in the same VPC, in europe-west1.2. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- B. 1. Create a VPC and a subnetwork in europe-west1.2. Expose the application with an internal load balancer.3. Create the new instance in the new subnetwork and use the load balancer's address as the endpoint.
- C. 1. Create a subnetwork in the same VPC, in europe-west1.2. Use Cloud VPN to connect the two subnetworks.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- D. 1. Create a VPC and a subnetwork in europe-west1.2. Peer the 2 VPCs.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.

Answer: B

NEW QUESTION 101

The core business of your company is to rent out construction equipment at a large scale. All the equipment that is being rented out has been equipped with multiple sensors that send event information every few seconds. These signals can vary from engine status, distance traveled, fuel level, and more. Customers are billed based on the consumption monitored by these sensors. You expect high throughput – up to thousands of events per hour per device – and need to retrieve consistent data based on the time of the event. Storing and retrieving individual signals should be atomic. What should you do?

- A. Create a file in Cloud Storage per device and append new data to that file.
- B. Create a file in Cloud Filestore per device and append new data to that file.
- C. Ingest the data into Datastore
- D. Store data in an entity group based on the device.
- E. Ingest the data into Cloud Bigtable
- F. Create a row key based on the event timestamp.

Answer: D

NEW QUESTION 106

Your organization is a financial company that needs to store audit log files for 3 years. Your organization has hundreds of Google Cloud projects. You need to implement a cost-effective approach for log file retention. What should you do?

- A. Create an export to the sink that saves logs from Cloud Audit to BigQuery.
- B. Create an export to the sink that saves logs from Cloud Audit to a Coldline Storage bucket.
- C. Write a custom script that uses logging API to copy the logs from Stackdriver logs to BigQuery.
- D. Export these logs to Cloud Pub/Sub and write a Cloud Dataflow pipeline to store logs to Cloud SQL.

Answer: A

NEW QUESTION 107

Your auditor wants to view your organization's use of data in Google Cloud. The auditor is most interested in auditing who accessed data in Cloud Storage buckets. You need to help the auditor access the data they need. What should you do?

- A. Assign the appropriate permissions, and then use Cloud Monitoring to review metrics
- B. Use the export logs API to provide the Admin Activity Audit Logs in the format they want
- C. Turn on Data Access Logs for the buckets they want to audit, and Then build a query in the log viewer that filters on Cloud Storage
- D. Assign the appropriate permissions, and then create a Data Studio report on Admin Activity Audit Logs

Answer: A

NEW QUESTION 109

You have a large 5-TB AVRO file stored in a Cloud Storage bucket. Your analysts are proficient only in SQL and need access to the data stored in this file. You want to find a cost-effective way to complete their request as soon as possible. What should you do?

- A. Load data in Cloud Datastore and run a SQL query against it.
- B. Create a BigQuery table and load data in BigQuer
- C. Run a SQL query on this table and drop this table after you complete your request.
- D. Create external tables in BigQuery that point to Cloud Storage buckets and run a SQL query on these external tables to complete your request.
- E. Create a Hadoop cluster and copy the AVRO file to NDFS by compressing i
- F. Load the file in a hive table and provide access to your analysts so that they can run SQL queries.

Answer: C

NEW QUESTION 110

You want to verify the IAM users and roles assigned within a GCP project named my-project. What should you do?

- A. Run gcloud iam roles lis
- B. Review the output section.
- C. Run gcloud iam service-accounts lis
- D. Review the output section.
- E. Navigate to the project and then to the IAM section in the GCP Consol
- F. Review the members and roles.
- G. Navigate to the project and then to the Roles section in the GCP Consol
- H. Review the roles and status.

Answer: D

NEW QUESTION 114

Your team maintains the infrastructure for your organization. The current infrastructure requires changes. You need to share your proposed changes with the rest of the team. You want to follow Google's recommended best practices. What should you do?

- A. Use Deployment Manager templates to describe the proposed changes and store them in a Cloud Storage bucket.
- B. Use Deployment Manager templates to describe the proposed changes and store them in Cloud Source Repositories.
- C. Apply the change in a development environment, run gcloud compute instances list, and then save the output in a shared Storage bucket.
- D. Apply the change in a development environment, run gcloud compute instances list, and then save the output in Cloud Source Repositories.

Answer: B

NEW QUESTION 115

Your company has a Google Cloud Platform project that uses BigQuery for data warehousing. Your data science team changes frequently and has few members. You need to allow members of this team to perform queries. You want to follow Google-recommended practices. What should you do?

- A. 1. Create an IAM entry for each data scientist's user account.2. Assign the BigQuery jobUser role to the group.
- B. 1. Create an IAM entry for each data scientist's user account.2. Assign the BigQuery dataViewer user role to the group.
- C. 1. Create a dedicated Google group in Cloud Identity.2. Add each data scientist's user account to the group.3. Assign the BigQuery jobUser role to the group.
- D. 1. Create a dedicated Google group in Cloud Identity.2. Add each data scientist's user account to the group.3. Assign the BigQuery dataViewer user role to the group.

Answer: D

NEW QUESTION 116

You have a project for your App Engine application that serves a development environment. The required testing has succeeded and you want to create a new project to serve as your production environment. What should you do?

- A. Use gcloud to create the new project, and then deploy your application to the new project.
- B. Use gcloud to create the new project and to copy the deployed application to the new project.
- C. Create a Deployment Manager configuration file that copies the current App Engine deployment into a new project.
- D. Deploy your application again using gcloud and specify the project parameter with the new project name to create the new project.

Answer: C

NEW QUESTION 119

You want to select and configure a solution for storing and archiving data on Google Cloud Platform. You need to support compliance objectives for data from one geographic location. This data is archived after 30 days and needs to be accessed annually. What should you do?

- A. Select Multi-Regional Storage
- B. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.
- C. Select Multi-Regional Storage
- D. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- E. Select Regional Storage
- F. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- G. Select Regional Storage
- H. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.

Answer: C

NEW QUESTION 123

You need to manage multiple Google Cloud Platform (GCP) projects in the fewest steps possible. You want to configure the Google Cloud SDK command line interface (CLI) so that you can easily manage multiple GCP projects. What should you?

- A. * 1. Create a configuration for each project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- B. * 1. Create a configuration for each project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project
- C. * 1. Use the default configuration for one project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- D. * 1. Use the default configuration for one project you need to manage.* 2. Use gcloud init to update the configuration values when you need to work with a non-default project.

Answer: D

NEW QUESTION 126

Your VMs are running in a subnet that has a subnet mask of 255.255.255.240. The current subnet has no more free IP addresses and you require an additional 10 IP addresses for new VMs. The existing and new VMs should all be able to reach each other without additional routes. What should you do?

- A. Use gcloud to expand the IP range of the current subnet.
- B. Delete the subnet, and recreate it using a wider range of IP addresses.
- C. Create a new projec
- D. Use Shared VPC to share the current network with the new project.
- E. Create a new subnet with the same starting IP but a wider range to overwrite the current subnet.

Answer: C

NEW QUESTION 128

You have one project called proj-sa where you manage all your service accounts. You want to be able to use a service account from this project to take snapshots of VMs running in another project called proj-vm. What should you do?

- A. Download the private key from the service account, and add it to each VMs custom metadata.
- B. Download the private key from the service account, and add the private key to each VM's SSH keys.
- C. Grant the service account the IAM Role of Compute Storage Admin in the project called proj-vm.
- D. When creating the VMs, set the service account's API scope for Compute Engine to read/write.

Answer: C

NEW QUESTION 131

Your finance team wants to view the billing report for your projects. You want to make sure that the finance team does not get additional permissions to the project. What should you do?

- A. Add the group for the finance team to roles/billing user role.
- B. Add the group for the finance team to roles/billing admin role.
- C. Add the group for the finance team to roles/billing viewer role.
- D. Add the group for the finance team to roles/billing project/Manager role.

Answer: A

NEW QUESTION 136

You need to set a budget alert for use of Compute Engineer services on one of the three Google Cloud Platform projects that you manage. All three projects are linked to a single billing account. What should you do?

- A. Verify that you are the project billing administrator
- B. Select the associated billing account and create a budget and alert for the appropriate project.
- C. Verify that you are the project billing administrator
- D. Select the associated billing account and create a budget and a custom alert.
- E. Verify that you are the project administrator
- F. Select the associated billing account and create a budget for the appropriate project.
- G. Verify that you are project administrator

H. Select the associated billing account and create a budget and a custom alert.

Answer: B

NEW QUESTION 141

You are managing a Data Warehouse on BigQuery. An external auditor will review your company's processes, and multiple external consultants will need view access to the data. You need to provide them with view access while following Google-recommended practices. What should you do?

- A. Grant each individual external consultant the role of BigQuery Editor
- B. Grant each individual external consultant the role of BigQuery Viewer
- C. Create a Google Group that contains the consultants and grant the group the role of BigQuery Editor
- D. Create a Google Group that contains the consultants, and grant the group the role of BigQuery Viewer

Answer: D

NEW QUESTION 143

You are the team lead of a group of 10 developers. You provided each developer with an individual Google Cloud Project that they can use as their personal sandbox to experiment with different Google Cloud solutions. You want to be notified if any of the developers are spending above \$500 per month on their sandbox environment. What should you do?

- A. Create a single budget for all projects and configure budget alerts on this budget.
- B. Create a separate billing account per sandbox project and enable BigQuery billing export
- C. Create a Data Studio dashboard to plot the spending per billing account.
- D. Create a budget per project and configure budget alerts on all of these budgets.
- E. Create a single billing account for all sandbox projects and enable BigQuery billing export
- F. Create a Data Studio dashboard to plot the spending per project.

Answer: C

NEW QUESTION 144

You have designed a solution on Google Cloud Platform (GCP) that uses multiple GCP products. Your company has asked you to estimate the costs of the solution. You need to provide estimates for the monthly total cost. What should you do?

- A. For each GCP product in the solution, review the pricing details on the products pricing pag
- B. Use the pricing calculator to total the monthly costs for each GCP product.
- C. For each GCP product in the solution, review the pricing details on the products pricing pag
- D. Create a Google Sheet that summarizes the expected monthly costs for each product.
- E. Provision the solution on GC
- F. Leave the solution provisioned for 1 wee
- G. Navigate to the Billing Report page in the Google Cloud Platform Consol
- H. Multiply the 1 week cost to determine the monthly costs.
- I. Provision the solution on GC
- J. Leave the solution provisioned for 1 wee
- K. Use Stackdriver to determine the provisioned and used resource amount
- L. Multiply the 1 week cost to determine the monthly costs.

Answer: A

NEW QUESTION 146

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

Answer: A

NEW QUESTION 149

You need to configure IAM access audit logging in BigQuery for external auditors. You want to follow Google-recommended practices. What should you do?

- A. Add the auditors group to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- B. Add the auditors group to two new custom IAM roles.
- C. Add the auditor user accounts to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- D. Add the auditor user accounts to two new custom IAM roles.

Answer: C

NEW QUESTION 153

You are assigned to maintain a Google Kubernetes Engine (GKE) cluster named dev that was deployed on Google Cloud. You want to manage the GKE configuration using the command line interface (CLI). You have just downloaded and installed the Cloud SDK. You want to ensure that future CLI commands by default address this specific cluster. What should you do?

- A. Use the command gcloud config sot container/cluster dev
- B. Use the command gcloud container clusters update dev
- C. Create a file called gk

- D. default in the -/ .gcloud folder that contains the cluster name
- E. Create a file called default
- F. json in the -/.gcloud folder that contains the cluster name

Answer: B

NEW QUESTION 158

You deployed an App Engine application using gcloud app deploy, but it did not deploy to the intended project. You want to find out why this happened and where the application deployed. What should you do?

- A. Check the app.yaml file for your application and check project settings.
- B. Check the web-application.xml file for your application and check project settings.
- C. Go to Deployment Manager and review settings for deployment of applications.
- D. Go to Cloud Shell and run gcloud config list to review the Google Cloud configuration used for deployment.

Answer: A

NEW QUESTION 159

You need to add a group of new users to Cloud Identity. Some of the users already have existing Google accounts. You want to follow one of Google's recommended practices and avoid conflicting accounts. What should you do?

- A. Invite the user to transfer their existing account
- B. Invite the user to use an email alias to resolve the conflict
- C. Tell the user that they must delete their existing account
- D. Tell the user to remove all personal email from the existing account

Answer: B

NEW QUESTION 164

You host a static website on Cloud Storage. Recently, you began to include links to PDF files on this site.

Currently, when users click on the links to these PDF files, their browsers prompt them to save the file onto their local system. Instead, you want the clicked PDF files to be displayed within the browser window directly, without prompting the user to save the file locally. What should you do?

- A. Enable Cloud CDN on the website frontend.
- B. Enable 'Share publicly' on the PDF file objects.
- C. Set Content-Type metadata to application/pdf on the PDF file objects.
- D. Add a label to the storage bucket with a key of Content-Type and value of application/pdf.

Answer: C

NEW QUESTION 169

You have an application that uses Cloud Spanner as a database backend to keep current state information about users. Cloud Bigtable logs all events triggered by users. You export Cloud Spanner data to Cloud Storage during daily backups. One of your analysts asks you to join data from Cloud Spanner and Cloud Bigtable for specific users. You want to complete this ad hoc request as efficiently as possible. What should you do?

- A. Create a dataflow job that copies data from Cloud Bigtable and Cloud Storage for specific users.
- B. Create a dataflow job that copies data from Cloud Bigtable and Cloud Spanner for specific users.
- C. Create a Cloud Dataproc cluster that runs a Spark job to extract data from Cloud Bigtable and Cloud Storage for specific users.
- D. Create two separate BigQuery external tables on Cloud Storage and Cloud Bigtable
- E. Use the BigQuery console to join these tables through user fields, and apply appropriate filters.

Answer: D

NEW QUESTION 171

You have production and test workloads that you want to deploy on Compute Engine. Production VMs need to be in a different subnet than the test VMs. All the VMs must be able to reach each other over internal IP without creating additional routes. You need to set up VPC and the 2 subnets. Which configuration meets these requirements?

- A. Create a single custom VPC with 2 subnet
- B. Create each subnet in a different region and with a different CIDR range.
- C. Create a single custom VPC with 2 subnet
- D. Create each subnet in the same region and with the same CIDR range.
- E. Create 2 custom VPCs, each with a single subnet
- F. Create each subnet in a different region and with a different CIDR range.
- G. Create 2 custom VPCs, each with a single subnet
- H. Create each subnet in the same region and with the same CIDR range.

Answer: A

NEW QUESTION 176

You are building a product on top of Google Kubernetes Engine (GKE). You have a single GKE cluster. For each of your customers, a Pod is running in that cluster, and your customers can run arbitrary code inside their Pod. You want to maximize the isolation between your customers' Pods. What should you do?

- A. Use Binary Authorization and whitelist only the container images used by your customers' Pods.
- B. Use the Container Analysis API to detect vulnerabilities in the containers used by your customers' Pods.
- C. Create a GKE node pool with a sandbox type configured to gvisor
- D. Add the parameter runtimeClassName: gvisor to the specification of your customers' Pods.

- E. Use the cos_containerd image for your GKE node
- F. Add a nodeSelector with the value cloud.google.com/gke-os-distribution: cos_containerd to the specification of your customers' Pods.

Answer: C

NEW QUESTION 181

You want to add a new auditor to a Google Cloud Platform project. The auditor should be allowed to read, but not modify, all project items. How should you configure the auditor's permissions?

- A. Create a custom role with view-only project permission
- B. Add the user's account to the custom role.
- C. Create a custom role with view-only service permission
- D. Add the user's account to the custom role.
- E. Select the built-in IAM project Viewer role
- F. Add the user's account to this role.
- G. Select the built-in IAM service Viewer role
- H. Add the user's account to this role.

Answer: C

NEW QUESTION 182

A team of data scientists infrequently needs to use a Google Kubernetes Engine (GKE) cluster that you manage. They require GPUs for some long-running, non-restartable jobs. You want to minimize cost. What should you do?

- A. Enable node auto-provisioning on the GKE cluster.
- B. Create a VerticalPodAutscaler for those workloads.
- C. Create a node pool with preemptible VMs and GPUs attached to those VMs.
- D. Create a node pool of instances with GPUs, and enable autoscaling on this node pool with a minimum size of 1.

Answer: C

NEW QUESTION 187

You have sensitive data stored in three Cloud Storage buckets and have enabled data access logging. You want to verify activities for a particular user for these buckets, using the fewest possible steps. You need to verify the addition of metadata labels and which files have been viewed from those buckets. What should you do?

- A. Using the GCP Console, filter the Activity log to view the information.
- B. Using the GCP Console, filter the Stackdriver log to view the information.
- C. View the bucket in the Storage section of the GCP Console.
- D. Create a trace in Stackdriver to view the information.

Answer: A

NEW QUESTION 192

You have a Dockerfile that you need to deploy on Kubernetes Engine. What should you do?

- A. Use kubectl app deploy <dockerfilename>.
- B. Use gcloud app deploy <dockerfilename>.
- C. Create a docker image from the Dockerfile and upload it to Container Registry
- D. Create a Deployment YAML file to point to that image
- E. Use kubectl to create the deployment with that file.
- F. Create a docker image from the Dockerfile and upload it to Cloud Storage
- G. Create a Deployment YAML file to point to that image
- H. Use kubectl to create the deployment with that file.

Answer: C

NEW QUESTION 194

You have a developer laptop with the Cloud SDK installed on Ubuntu. The Cloud SDK was installed from the Google Cloud Ubuntu package repository. You want to test your application locally on your laptop with Cloud Datastore. What should you do?

- A. Export Cloud Datastore data using gcloud datastore export.
- B. Create a Cloud Datastore index using gcloud datastore indexes create.
- C. Install the google-cloud-sdk-datastore-emulator component using the apt get install command.
- D. Install the cloud-datastore-emulator component using the gcloud components install command.

Answer: D

NEW QUESTION 199

You need to create a custom VPC with a single subnet. The subnet's range must be as large as possible. Which range should you use?

- A. .00.0.0/0
- B. 10.0.0.0/8
- C. 172.16.0.0/12
- D. 192.168.0.0/16

Answer: B

Explanation:

https://cloud.google.com/vpc/docs/vpc#manually_created_subnet_ip_ranges

NEW QUESTION 202


You need to produce a list of the enabled Google Cloud Platform APIs for a GCP project using the gcloud command line in the Cloud Shell. The project name is my-project. What should you do?

- A. Run gcloud projects list to get the project ID, and then run gcloud services list --project <project ID>.
- B. Run gcloud init to set the current project to my-project, and then run gcloud services list --available.
- C. Run gcloud info to view the account value, and then run gcloud services list --account <Account>.
- D. Run gcloud projects describe <project ID> to verify the project value, and then run gcloud services list--available.

Answer: A

NEW QUESTION 204

You are building a pipeline to process time-series data. Which Google Cloud Platform services should you put in boxes 1,2,3, and 4?

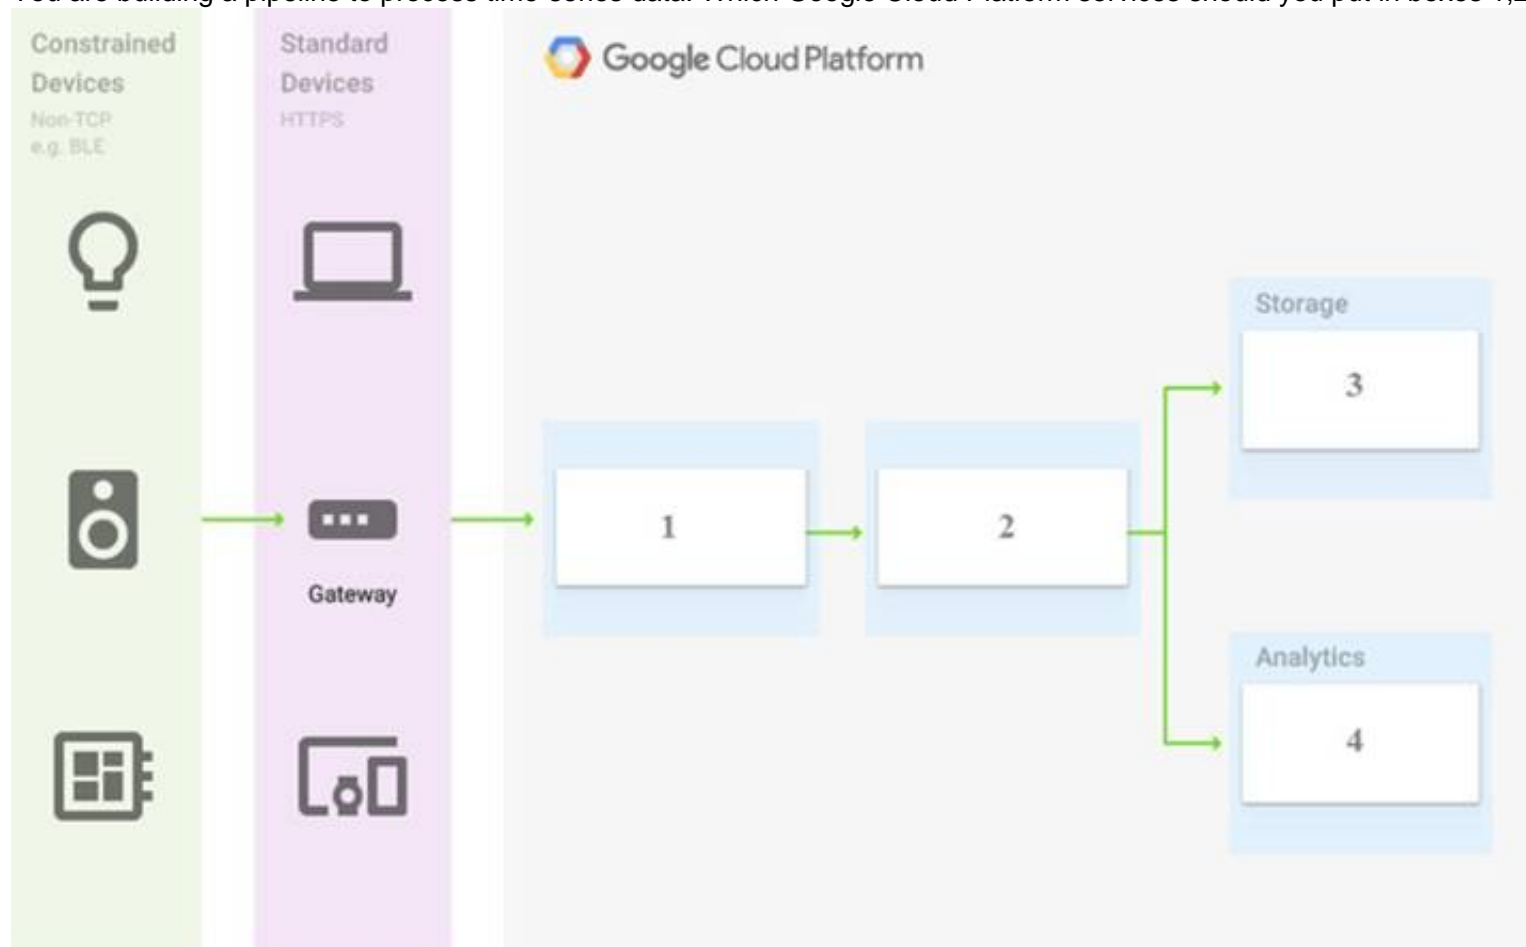

- A. Cloud Pub/Sub, Cloud Dataflow, Cloud Datastore, BigQuery
- B. Firebase Messages, Cloud Pub/Sub, Cloud Spanner, BigQuery
- C. Cloud Pub/Sub, Cloud Storage, BigQuery, Cloud Bigtable
- D. Cloud Pub/Sub, Cloud Dataflow, Cloud Bigtable, BigQuery

Answer: D

NEW QUESTION 209

You have created a code snippet that should be triggered whenever a new file is uploaded to a Cloud Storage bucket. You want to deploy this code snippet. What should you do?

- A. Use App Engine and configure Cloud Scheduler to trigger the application using Pub/Sub.
- B. Use Cloud Functions and configure the bucket as a trigger resource.
- C. Use Google Kubernetes Engine and configure a CronJob to trigger the application using Pub/Sub.
- D. Use Dataflow as a batch job, and configure the bucket as a data source.

Answer: A

NEW QUESTION 212

Your management has asked an external auditor to review all the resources in a specific project. The security team has enabled the Organization Policy called Domain Restricted Sharing on the organization node by specifying only your Cloud Identity domain. You want the auditor to only be able to view, but not modify, the resources in that project. What should you do?

- A. Ask the auditor for their Google account, and give them the Viewer role on the project.
- B. Ask the auditor for their Google account, and give them the Security Reviewer role on the project.
- C. Create a temporary account for the auditor in Cloud Identity, and give that account the Viewer role on the project.
- D. Create a temporary account for the auditor in Cloud Identity, and give that account the Security Reviewer role on the project.

Answer: A

NEW QUESTION 214

You are building an application that processes data files uploaded from thousands of suppliers. Your primary goals for the application are data security and the

expiration of aged data. You need to design the application to:

- Restrict access so that suppliers can access only their own data.
- Give suppliers write access to data only for 30 minutes.
- Delete data that is over 45 days old.

You have a very short development cycle, and you need to make sure that the application requires minimal maintenance. Which two strategies should you use? (Choose two.)

- A. Build a lifecycle policy to delete Cloud Storage objects after 45 days.
- B. Use signed URLs to allow suppliers limited time access to store their objects.
- C. Set up an SFTP server for your application, and create a separate user for each supplier.
- D. Build a Cloud function that triggers a timer of 45 days to delete objects that have expired.
- E. Develop a script that loops through all Cloud Storage buckets and deletes any buckets that are older than 45 days.

Answer: AE

NEW QUESTION 217

You have been asked to set up Object Lifecycle Management for objects stored in storage buckets. The objects are written once and accessed frequently for 30 days. After 30 days, the objects are not read again unless there is a special need. The object should be kept for three years, and you need to minimize cost. What should you do?

- A. Set up a policy that uses Nearline storage for 30 days and then moves to Archive storage for three years.
- B. Set up a policy that uses Standard storage for 30 days and then moves to Archive storage for three years.
- C. Set up a policy that uses Nearline storage for 30 days, then moves the Coldline for one year, and then moves to Archive storage for two years.
- D. Set up a policy that uses Standard storage for 30 days, then moves to Coldline for one year, and then moves to Archive storage for two years.

Answer: A

NEW QUESTION 220

You need to create a custom IAM role for use with a GCP service. All permissions in the role must be suitable for production use. You also want to clearly share with your organization the status of the custom role. This will be the first version of the custom role. What should you do?

- A. Use permissions in your role that use the 'supported' support level for role permission
- B. Set the role stage to ALPHA while testing the role permissions.
- C. Use permissions in your role that use the 'supported' support level for role permission
- D. Set the role stage to BETA while testing the role permissions.
- E. Use permissions in your role that use the 'testing' support level for role permission
- F. Set the role stage to ALPHA while testing the role permissions.
- G. Use permissions in your role that use the 'testing' support level for role permission
- H. Set the role stage to BETA while testing the role permissions.

Answer: C

NEW QUESTION 222

You deployed a new application inside your Google Kubernetes Engine cluster using the YAML file specified below.

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: myapp-deployment
spec:
  selector:
    matchLabels:
      app: myapp
  replicas: 2
  template:
    metadata:
      labels:
        app: myapp
    spec:
      containers:
        - name: myapp
          image: myapp:1.1
          ports:
            - containerPort: 80
```

```
apiVersion: v1
kind: Service
metadata:
  name: myapp-service
spec:
  ports:
    - port: 8000
      targetPort: 80
      protocol: TCP
  selector:
    app: myapp
```

You check the status of the deployed pods and notice that one of them is still in PENDING status:


```
kubectl get pods -l app=myapp
```

NAME	READY	STATUS	RESTART	AGE
myapp-deployment-58ddb995-lp86m	0/1	Pending	0	9m
myapp-deployment-58ddb995-qjpkg	1/1	Running	0	9m

You want to find out why the pod is stuck in pending status. What should you do?

- A. Review details of the myapp-service Service object and check for error messages.
- B. Review details of the myapp-deployment Deployment object and check for error messages.
- C. Review details of myapp-deployment-58ddb995-lp86m Pod and check for warning messages.
- D. View logs of the container in myapp-deployment-58ddb995-lp86m pod and check for warning messages.

Answer: C

NEW QUESTION 227

You are running a data warehouse on BigQuery. A partner company is offering a recommendation engine based on the data in your data warehouse. The partner company is also running their application on Google Cloud. They manage the resources in their own project, but they need access to the BigQuery dataset in your project. You want to provide the partner company with access to the dataset. What should you do?

- A. Create a Service Account in your own project, and grant this Service Account access to BigQuery in your project
- B. Create a Service Account in your own project, and ask the partner to grant this Service Account access to BigQuery in their project
- C. Ask the partner to create a Service Account in their project, and have them give the Service Account access to BigQuery in their project
- D. Ask the partner to create a Service Account in their project, and grant their Service Account access to the BigQuery dataset in your project

Answer: D

NEW QUESTION 231

You are deploying a production application on Compute Engine. You want to prevent anyone from accidentally destroying the instance by clicking the wrong button. What should you do?

- A. Disable the flag "Delete boot disk when instance is deleted."
- B. Enable delete protection on the instance.
- C. Disable Automatic restart on the instance.
- D. Enable Preemptibility on the instance.

Answer: A

NEW QUESTION 234

The sales team has a project named Sales Data Digest that has the ID acme-data-digest. You need to set up similar Google Cloud resources for the marketing team but their resources must be organized independently of the sales team. What should you do?

- A. Grant the Project Editor role to the Marketing team for acme data digest
- B. Create a Project Lien on acme-data digest and then grant the Project Editor role to the Marketing team
- C. Create another project with the ID acme-marketing-data-digest for the Marketing team and deploy the resources there
- D. Create a new project named Meeting Data Digest and use the ID acme-data-digest. Grant the Project Editor role to the Marketing team.

Answer: C

NEW QUESTION 239

You significantly changed a complex Deployment Manager template and want to confirm that the dependencies of all defined resources are properly met before committing it to the project. You want the most rapid feedback on your changes. What should you do?

- A. Use granular logging statements within a Deployment Manager template authored in Python.
- B. Monitor activity of the Deployment Manager execution on the Stackdriver Logging page of the GCP Console.
- C. Execute the Deployment Manager template against a separate project with the same configuration, and monitor for failures.
- D. Execute the Deployment Manager template using the `--preview` option in the same project, and observe the state of interdependent resources.

Answer: D

NEW QUESTION 242

You need to set up a policy so that videos stored in a specific Cloud Storage Regional bucket are moved to Coldline after 90 days, and then deleted after one year from their creation. How should you set up the policy?

- A. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- B. Set the SetStorageClass action to 90 days and the Delete action to 275 days (365 – 90)
- C. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- D. Set the SetStorageClass action to 90 days and the Delete action to 365 days.
- E. Use gsutil rewrite and set the Delete action to 275 days (365-90).
- F. Use gsutil rewrite and set the Delete action to 365 days.

Answer: A

NEW QUESTION 244

You need to configure optimal data storage for files stored in Cloud Storage for minimal cost. The files are used in a mission-critical analytics pipeline that is used continually. The users are in Boston, MA (United States). What should you do?

- A. Configure regional storage for the region closest to the users Configure a Nearline storage class
- B. Configure regional storage for the region closest to the users Configure a Standard storage class
- C. Configure dual-regional storage for the dual region closest to the users Configure a Nearline storage class
- D. Configure dual-regional storage for the dual region closest to the users Configure a Standard storage class

Answer: B

NEW QUESTION 248

Your company has an internal application for managing transactional orders. The application is used exclusively by employees in a single physical location. The application requires strong consistency, fast queries, and ACID guarantees for multi-table transactional updates. The first version of the application is implemented in PostgreSQL, and you want to deploy it to the cloud with minimal code changes. Which database is most appropriate for this application?

- A. BigQuery
- B. Cloud SQL
- C. Cloud Spanner
- D. Cloud Datastore

Answer: B

NEW QUESTION 253

You need to enable traffic between multiple groups of Compute Engine instances that are currently running two different GCP projects. Each group of Compute Engine instances is running in its own VPC. What should you do?

- A. Verify that both projects are in a GCP Organizatio
- B. Create a new VPC and add all instances.
- C. Verify that both projects are in a GCP Organizatio
- D. Share the VPC from one project and request that the Compute Engine instances in the other project use this shared VPC.
- E. Verify that you are the Project Administrator of both project
- F. Create two new VPCs and add all instances.
- G. Verify that you are the Project Administrator of both project
- H. Create a new VPC and add all instances.

Answer: B

NEW QUESTION 255

You need to track and verify modifications to a set of Google Compute Engine instances in your Google Cloud project. In particular, you want to verify OS system patching events on your virtual machines (VMs). What should you do?

- A. Review the Compute Engine activity logs Select and review the Admin Event logs
- B. Review the Compute Engine activity logs Select and review the System Event logs
- C. Install the Cloud Logging Agent In Cloud Logging review the Compute Engine syslog logs
- D. Install the Cloud Logging Agent In Cloud Logging, review the Compute Engine operation logs

Answer: A

NEW QUESTION 258

You are working with a Cloud SQL MySQL database at your company. You need to retain a month-end copy of the database for three years for audit purposes. What should you do?

- A. Save file automatic first-of-the- month backup for three years Store the backup file in an Archive class Cloud Storage bucket
- B. Convert the automatic first-of-the-month backup to an export file Write the export file to a Coldlineclass Cloud Storage bucket
- C. Set up an export job for the first of the month Write the export file to an Archive class Cloud Storage bucket
- D. Set up an on-demand backup tor the first of the month Write the backup to an Archive class Cloud Storage bucket

Answer: A

NEW QUESTION 263

You are creating a Google Kubernetes Engine (GKE) cluster with a cluster autoscaler feature enabled. You need to make sure that each node of the cluster will run a monitoring pod that sends container metrics to a third-party monitoring solution. What should you do?

- A. Deploy the monitoring pod in a StatefulSet object.
- B. Deploy the monitoring pod in a DaemonSet object.
- C. Reference the monitoring pod in a Deployment object.
- D. Reference the monitoring pod in a cluster initializer at the GKE cluster creation time.

Answer: B

NEW QUESTION 265

You need to reduce GCP service costs for a division of your company using the fewest possible steps. You need to turn off all configured services in an existing GCP project. What should you do?

- A. * 1. Verify that you are assigned the Project Owners IAM role for this project.* 2. Locate the project in the GCP console, click Shut down and then enter the project ID.
- B. * 1. Verify that you are assigned the Project Owners IAM role for this project.* 2. Switch to the project in the GCP console, locate the resources and delete them.

C. 1. Verify that you are assigned the Organizational Administrator IAM role for this project.* 2. Locate the project in the GCP console, enter the project ID and then click Shut down.
D. * 1. Verify that you are assigned the Organizational Administrators IAM role for this project.* 2. Switch to the project in the GCP console, locate the resources and delete them.

Answer: C

NEW QUESTION 270

Your company has a single sign-on (SSO) identity provider that supports Security Assertion Markup Language (SAML) integration with service providers. Your company has users in Cloud Identity. You would like users to authenticate using your company's SSO provider. What should you do?

- A. In Cloud Identity, set up SSO with Google as an identity provider to access custom SAML apps.
- B. In Cloud Identity, set up SSO with a third-party identity provider with Google as a service provider.
- C. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Mobile & Desktop Apps.
- D. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Web Server Applications.

Answer: C

NEW QUESTION 275

You have been asked to create robust Virtual Private Network (VPN) connectivity between a new Virtual Private Cloud (VPC) and a remote site. Key requirements include dynamic routing, a shared address space of 10.19.0.1/22, and no overprovisioning of tunnels during a failover event. You want to follow Google-recommended practices to set up a high availability Cloud VPN. What should you do?

- A. Use a custom mode VPC network, configure static routes, and use active/passive routing
- B. Use an automatic mode VPC network, configure static routes, and use active/active routing
- C. Use a custom mode VPC network use Cloud Router border gateway protocol (BGP) routes, and use active/passive routing
- D. Use an automatic mode VPC network, use Cloud Router border gateway protocol (BGP) routes and configure policy-based routing

Answer: D

NEW QUESTION 280

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

Associate-Cloud-Engineer Practice Exam Features:

- * Associate-Cloud-Engineer Questions and Answers Updated Frequently
- * Associate-Cloud-Engineer Practice Questions Verified by Expert Senior Certified Staff
- * Associate-Cloud-Engineer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * Associate-Cloud-Engineer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The Associate-Cloud-Engineer Practice Test Here](#)