

# Fortinet

## Exam Questions NSE4\_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2



#### NEW QUESTION 1

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. FTM
- B. SSH
- C. HTTPS
- D. FortiTelemetry

**Answer:** BC

#### NEW QUESTION 2

Which three methods are used by the collector agent for AD polling? (Choose three.)

- A. FortiGate polling
- B. NetAPI
- C. Novell API
- D. WMI
- E. WinSecLog

**Answer:** BDE

#### NEW QUESTION 3

Which two attributes are required on a certificate so it can be used as a CA certificate on SSL inspection? (Choose two.)

- A. The keyUsage extension must be set to keyCertSign.
- B. The CA extension must be set to TRUE.
- C. The issuer must be a public CA.
- D. The common name on the subject field must use a wildcard name.

**Answer:** AB

#### NEW QUESTION 4

A network administrator enabled antivirus and selected an SSL inspection profile on a firewall policy. When downloading an EICAR test file through HTTP, FortiGate detects the virus and blocks the file. When downloading the same file through HTTPS, FortiGate does not detect the virus and does not block the file, allowing it to be downloaded.

The administrator confirms that the traffic matches the configured firewall policy.

What are two reasons for the failed virus detection by FortiGate? (Choose two.)

- A. The website is exempted from SSL inspection.
- B. The EICAR test file exceeds the protocol options oversize limit.
- C. The selected SSL inspection profile has certificate inspection enabled.
- D. The browser does not trust the FortiGate self-signed CA certificate.

**Answer:** AD

#### NEW QUESTION 5

Which statement is correct regarding the use of application control for inspecting web applications?

- A. Application control can identify child and parent applications, and perform different actions on them.
- B. Application control signatures are organized in a nonhierarchical structure.
- C. Application control does not require SSL inspection to identify web applications.
- D. Application control does not display a replacement message for a blocked web application.

**Answer:** A

#### NEW QUESTION 6

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

**Answer:** A

#### NEW QUESTION 7

Refer to the exhibits.

The exhibits contain a network diagram, and virtual IP, IP pool, and firewall policies configuration information.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

The first firewall policy has NAT enabled using IP pool.

The second firewall policy is configured with a VIP as the destination address.

Exhibit A Exhibit B

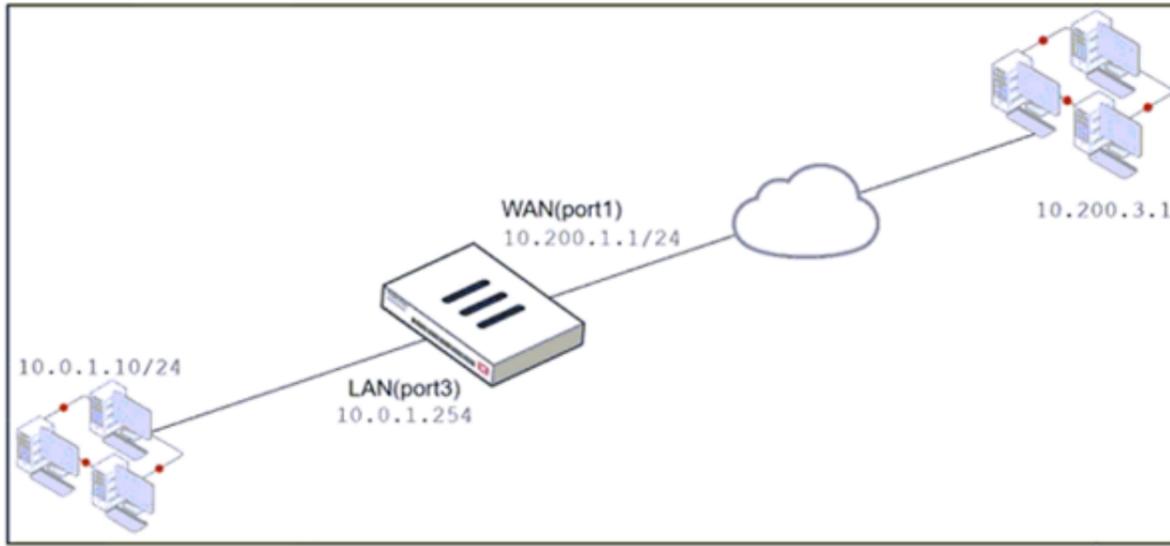


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
Full_Access	LAN (port3)	WAN (port1)	all	all	always	ALL	ACCEPT	IP Pool
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Disabled

**Edit Virtual IP**

VIP type: IPv4  
 Name: VIP  
 Comments: Write a comment...  
 Color: Change

**Network**

Interface: port1  
 Type: Static NAT  
 External IP address/range: 10.200.1.10  
 Map to IPv4 address/range: 10.0.1.10

Optional Filters:

Port Forwarding:

Protocol: TCP | UDP | SCTP | ICMP  
 Port Mapping Type: One to one | Many to many  
 External service port: 443  
 Map to IPv4 port: 443

**Edit Dynamic IP Pool**

Name: IP Pool  
 Comments: Write a comment...  
 Type: Overload | One-to-One | Fixed Port Range | Port Block Allocation  
 External IP address/range: 10.200.1.100-10.200.1.100  
 NAT64:   
 ARP Reply:

Which IP address will be used to source NAT (SNAT) the internet traffic coming from a workstation with the IP address 10.0.1.10?

- A. 10.200.1.1
- B. 10.0.1.254
- C. 10.200.1.10
- D. 10.200.1.100

Answer: D

**NEW QUESTION 8**

Refer to the exhibits.

Exhibit A shows system performance output. Exhibit B shows a FortiGate configured with the default configuration of high memory usage thresholds.

Exhibit A Exhibit B

```
# get system performance status
CPU states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
CPU0 states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
Memory: 2061108k total, 1854997k used (90%), 106111k free (5.1%), 100000k freeable (4.8%)
Average network usage: 83 / 0 kbps in 1 minute, 81 / 0 kbps in 10 minutes, 81 / 0 kbps in 30
minutes
Average sessions: 5 sessions in 1 minute, 3 sessions in 10 minutes, 3 sessions in 30 minutes
Average session setup rate: 0 sessions per second in last 1 minute, 0 sessions per second in last
10 minutes, 0 sessions per second in last 30 minutes
Virus caught: 0 total in 1 minute
IPS attacks blocked: 0 total in 1 minute
Uptime: 10 days, 3 hours, 28 minutes
```

Exhibit A Exhibit B

```
config system global
  set memory-use-threshold-red 88
  set memory-use-threshold-extreme 95
  set memory-use-threshold-green 82
end
```

Based on the system performance output, which two results are correct? (Choose two.)

- A. FortiGate will start sending all files to FortiSandbox for inspection.
- B. FortiGate has entered conserve mode.
- C. Administrators cannot change the configuration.
- D. Administrators can access FortiGate only through the console port.

Answer: BD

NEW QUESTION 9

Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS

Answer: CD

NEW QUESTION 10

Refer to the exhibits.  
 The exhibits show the firewall policies and the objects used in the firewall policies.  
 The administrator is using the Policy Lookup feature and has entered the search criteria shown in the exhibit.

Exhibit A Exhibit B

### Address Object

Name	Details
IP Range/Subnet	
LOCAL_CLIENT	10.0.1.10/32
all	0.0.0.0
FQDN	
facebook.com	facebook.com

### Internet Service Object

Name	Direction	Number of Entries																								
Predefined Internet Services																										
Facebook-Web	Destination	26,578																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>IP</th> <th>Port</th> <th>Protocol</th> <th>Status</th> </tr> </thead> <tbody> <tr> <td>1.9.91.17 - 1.9.91.18</td> <td>80</td> <td>TCP</td> <td>Enabled</td> </tr> <tr> <td></td> <td>443</td> <td></td> <td></td> </tr> <tr> <td></td> <td>8443</td> <td></td> <td></td> </tr> <tr> <td>1.9.91.17 - 1.9.91.18</td> <td>443</td> <td>UDP</td> <td>Enabled</td> </tr> <tr> <td>1.9.91.30</td> <td>443</td> <td>UDP</td> <td>Enabled</td> </tr> </tbody> </table>			IP	Port	Protocol	Status	1.9.91.17 - 1.9.91.18	80	TCP	Enabled		443				8443			1.9.91.17 - 1.9.91.18	443	UDP	Enabled	1.9.91.30	443	UDP	Enabled
IP	Port	Protocol	Status																							
1.9.91.17 - 1.9.91.18	80	TCP	Enabled																							
	443																									
	8443																									
1.9.91.17 - 1.9.91.18	443	UDP	Enabled																							
1.9.91.30	443	UDP	Enabled																							

### Firewall Policies

ID	From	To	Source	Destination	Schedule	Service	Action	NAT
3	port3	port1	LOCAL_CLIENT	facebook.com	always	ULL_UDP	ACCEPT	Enabled
1	port1	port3	facebook.com	LOCAL_CLIENT	always	ULL_UDP	ACCEPT	Enabled
4	port4	port1	LOCAL_CLIENT	all	always	HTTP DNS HTTPS	ACCEPT	Enabled
5	port3	port1	LOCAL_CLIENT	Facebook-Web	always	Internet Service	ACCEPT	Enabled
2	port3	port1	all	all	always	ALL	ACCEPT	Enabled

**Exhibit A** **Exhibit B**

**Policy Lookup**

Incoming Interface: port3  
 IP Version: IPv4  
 Protocol: TCP  
 Source: 10.0.1.10  
 Source Port: Optional (1-65535)  
 Destination: facebook.com  
 Destination Port: 443

Which policy will be highlighted, based on the input criteria?


- A. Policy with ID 4.
- B. Policy with ID 5.
- C. Policies with ID 2 and 3.
- D. Policy with ID 4.

**Answer:** A

**NEW QUESTION 10**

Refer to the exhibit.

**Network Diagram**

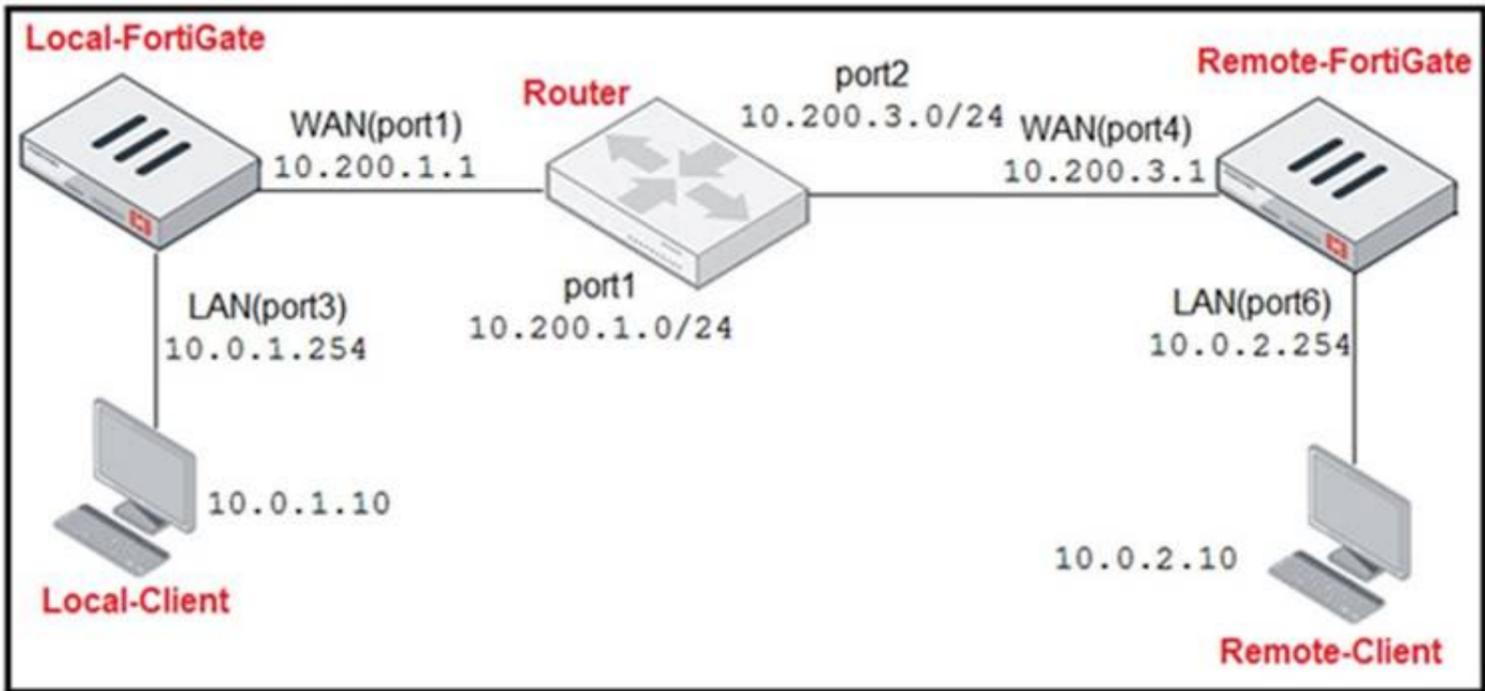

**Central SNAT Policies Local-FortiGate**

ID	From	To	Source Address	Protocol Number	Destination Address	Translated Address
2	LAN(port3)	WAN(port1)	all	6	REMOTE_FORTIGATE	SNAT-Pool
1	LAN(port3)	WAN(port1)	all	1	all	SNAT-Remote1
3	LAN(port3)	WAN(port1)	all	2	all	SNAT-Remote

**IP Pool Local-FortiGate**

Name	External IP Range	Type	ARP Reply
SNAT-Pool	10.200.1.49-10.200.1.49	Overload	Enabled
SNAT-Remote	10.200.1.149-10.200.1.149	Overload	Enabled
SNAT-Remote1	10.200.1.99-10.200.1.99	Overload	Enabled

**Protocol Number Table**

Protocol	Protocol Number
TCP	6
ICMP	1
IGMP	2

The exhibit contains a network diagram, central SNAT policy, and IP pool configuration. The WAN (port1) interface has the IP address 10.200. 1. 1/24. The LAN (port3) interface has the IP address 10.0. 1.254/24.

A firewall policy is configured to allow to destinations from LAN (port3) to WAN (port1). Central NAT is enabled, so NAT settings from matching Central SNAT policies will be applied.

Which IP address will be used to source NAT the traffic, if the user on Local-Client (10.0. 1. 10) pings the IP address of Remote-FortiGate (10.200.3. 1)?

- A. 10.200. 1. 149
- B. 10.200. 1. 1
- C. 10.200. 1.49
- D. 10.200. 1.99

**Answer: D**

**NEW QUESTION 15**

Refer to the exhibit.

```
FGT1 # get router info routing-table database
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
       O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       > - selected route, * - FIB route, p - stale info

S    *> 0.0.0.0/0 [10/0] via 172.20.121.2, port1, [20/0]
      *>           [10/0] via 10.0.0.2, port2, [30/0]
S    0.0.0.0/0 [20/0] via 192.168.15.2, port3, [10/0]
C    *> 10.0.0.0/24 is directly connected, port2
S    172.13.24.0/24 [10.0] is directly connected, port4
C    *> 172.20.121.0/24 is directly connected, port1
S    *> 192.167.1.0/24 [10/0] via 10.0.0.2, port2
C    *> 192.168.15.0/24 is directly connected, port3
```

Given the routing database shown in the exhibit, which two statements are correct? (Choose two.)

- A. The port3 default route has the highest distance.
- B. The port3 default route has the lowest metric.
- C. There will be eight routes active in the routing table.
- D. The port1 and port2 default routes are active in the routing table.

**Answer: AD**

**NEW QUESTION 20**

Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.
- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

**Answer: D**

**NEW QUESTION 25**

Which three statements are true regarding session-based authentication? (Choose three.)

- A. HTTP sessions are treated as a single user.
- B. IP sessions from the same source IP address are treated as a single user.
- C. It can differentiate among multiple clients behind the same source IP address.
- D. It requires more resources.
- E. It is not recommended if multiple users are behind the source NAT

**Answer:** ACD

**NEW QUESTION 30**

Refer to the web filter raw logs.

```
date=2020-07-09 time=12:51:51 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313511250173744 tz="-0400" policyid=1
sessionid=5526 srcip=10.0.1.10 srcport=48660 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web" action="blocked"
reqtype="direct" url="https://twitter.com/" sentbyte=517
rcvbyte=0 direction="outgoing" msg="URL belongs to a category
with warnings enabled" method="domain" cat=37 catdesc="Social
Networking"

date=2020-07-09 time=12:52:16 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313537024536428 tz="-0400" policyid=1
sessionid=5552 srcip=10.0.1.10 srcport=48698 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web"
action="passthrough" reqtype="direct" url="https://twitter.com/"
sentbyte=369 rcvbyte=0 direction="outgoing" msg="URL belongs to
a category with warnings enabled" method="domain" cat=37
catdesc="Social Networking"
```

Based on the raw logs shown in the exhibit, which statement is correct?

- A. Social networking web filter category is configured with the action set to authenticate.
- B. The action on firewall policy ID 1 is set to warning.
- C. Access to the social networking web filter category was explicitly blocked to all users.
- D. The name of the firewall policy is all\_users\_web.

**Answer:** A

**NEW QUESTION 33**

Examine this PAC file configuration.


Which of the following statements are true? (Choose two.)

- A. Browsers can be configured to retrieve this PAC file from the FortiGate.
- B. Any web request to the 172.25. 120.0/24 subnet is allowed to bypass the proxy.
- C. All requests not made to Fortinet.com or the 172.25. 120.0/24 subnet, have to go through altproxy.corp.com: 8060.
- D. Any web request fortinet.com is allowed to bypass the proxy.

**Answer:** AD

**NEW QUESTION 37**

Refer to the exhibit.

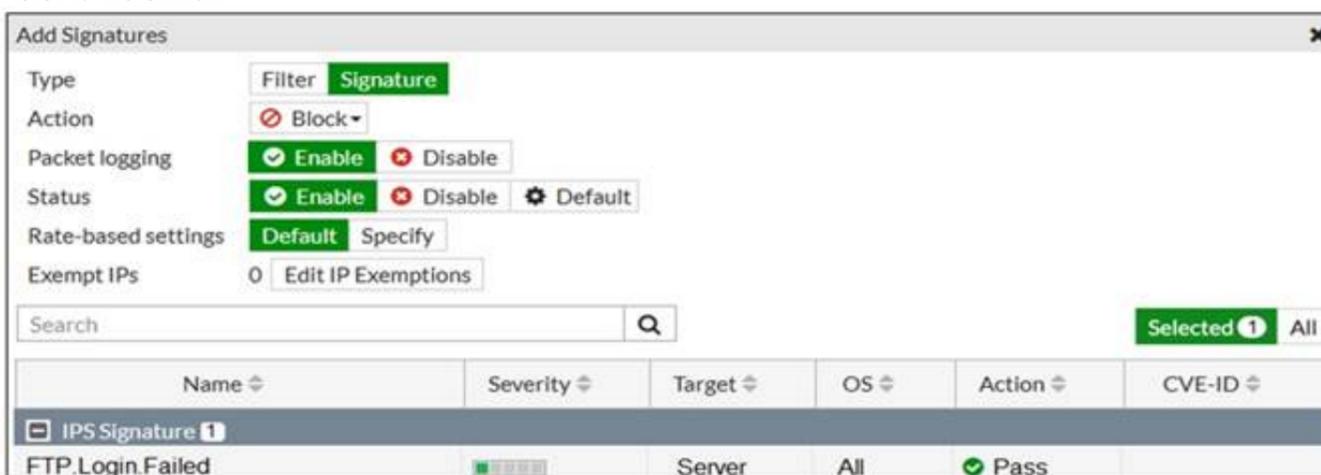

Review the Intrusion Prevention System (IPS) profile signature settings. Which statement is correct in adding the FTP.Login.Failed signature to the IPS sensor profile?

- A. The signature setting uses a custom rating threshold.
- B. The signature setting includes a group of other signatures.
- C. Traffic matching the signature will be allowed and logged.
- D. Traffic matching the signature will be silently dropped and logged.

**Answer:** D

**Explanation:**

Action is drop, signature default action is listed only in the signature, it would only match if action was set to default.

**NEW QUESTION 41**

Which of the following statements about central NAT are true? (Choose two.)

- A. IP tool references must be removed from existing firewall policies before enabling central NAT .
- B. Central NAT can be enabled or disabled from the CLI only.
- C. Source NAT, using central NAT, requires at least one central SNAT policy.
- D. Destination NAT, using central NAT, requires a VIP object as the destination address in a firewall.

**Answer:** AB

**NEW QUESTION 44**

Which three criteria can a FortiGate use to look for a matching firewall policy to process traffic? (Choose three.)

- A. Source defined as Internet Services in the firewall policy.
- B. Destination defined as Internet Services in the firewall policy.
- C. Highest to lowest priority defined in the firewall policy.
- D. Services defined in the firewall policy.
- E. Lowest to highest policy ID number.

**Answer:** ABD

**Explanation:**

When a packet arrives, how does FortiGate find a matching policy? Each policy has match criteria, which you can define using the following objects:

- Incoming Interface
- Outgoing Interface
- Source: IP address, user, internet services
- Destination: IP address or internet services
- Service: IP protocol and port number
- Schedule: Applies during configured times

**NEW QUESTION 48**

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

**Answer:** BC

**Explanation:**

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

**NEW QUESTION 52**

Which three authentication timeout types are availability for selection on FortiGate? (Choose three.)

- A. hard-timeout
- B. auth-on-demand
- C. soft-timeout
- D. new-session
- E. Idle-timeout

**Answer:** ADE

**Explanation:**

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD37221>

**NEW QUESTION 56**

Refer to the exhibit.

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 status is up, but phase 2 fails to come up.



Based on the phase 2 configuration shown in the exhibit, which configuration change will bring phase 2 up?

- A. On Remote-FortiGate, set Seconds to 43200.
- B. On HQ-FortiGate, set Encryption to AES256.
- C. On HQ-FortiGate, enable Diffie-Hellman Group 2.
- D. On HQ-FortiGate, enable Auto-negotiate.

**Answer: B**

**NEW QUESTION 58**

Which two statements are correct about a software switch on FortiGate? (Choose two.)

- A. It can be configured only when FortiGate is operating in NAT mode
- B. Can act as a Layer 2 switch as well as a Layer 3 router
- C. All interfaces in the software switch share the same IP address
- D. It can group only physical interfaces

**Answer: AC**

**NEW QUESTION 59**

Refer to the exhibits.

The exhibits show a network diagram and firewall configurations.

An administrator created a Deny policy with default settings to deny Webserver access for Remote-User2. Remote-User1 must be able to access the Webserver. Remote-User2 must not be able to access the Webserver.

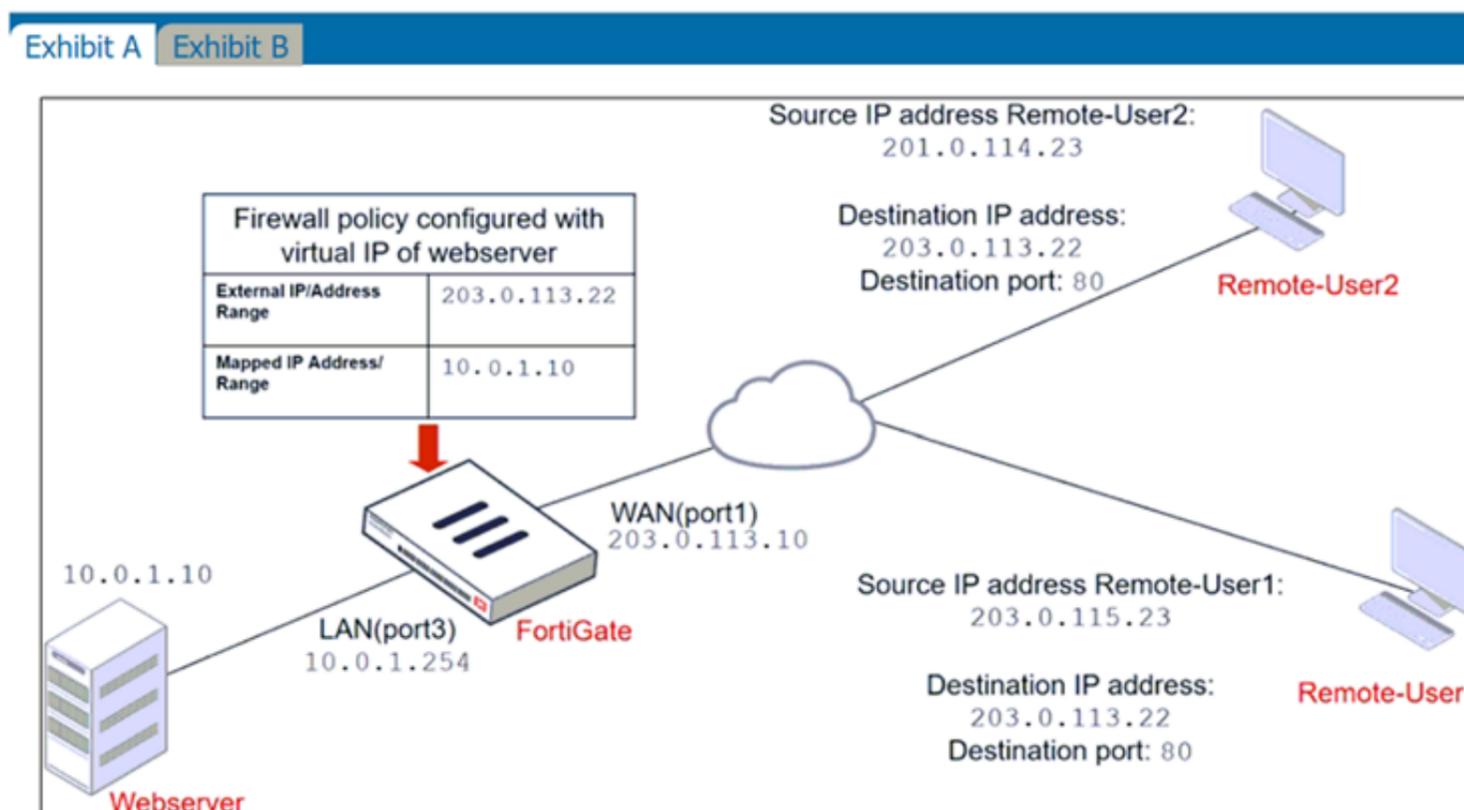


Exhibit A Exhibit B

**Edit Address**

Name: Deny\_IP

Color: Change

Type: Subnet

IP/Netmask: 201.0.114.23/32

Interface: WAN (port1)

Static route configuration:

Comments: Deny web server access. 23/255

**Firewall address object**

**Firewall policies**

ID	Name	Source	Destination	Schedule	Service	Action
WAN (port1) → LAN (port3) 2						
4	Deny	Deny_IP	all	always	ALL	DENY
3	Allow_access	all	Webserver	always	ALL	ACCEPT

In this scenario, which two changes can the administrator make to deny Webserver access for Remote-User2? (Choose two.)

- A. Disable match-vip in the Deny policy.
- B. Set the Destination address as Deny\_IP in the Allow-access policy.
- C. Enable match vip in the Deny policy.
- D. Set the Destination address as Web\_server in the Deny policy.

**Answer:** CD

**Explanation:**


<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Firewall-does-not-block-incoming-WAN-to-LAN/ta>

**NEW QUESTION 63**

Refer to the exhibits.

Exhibit A shows a topology for a FortiGate HA cluster that performs proxy-based inspection on traffic. Exhibit B shows the HA configuration and the partial output of the get system ha status command.

Exhibit A Exhibit B

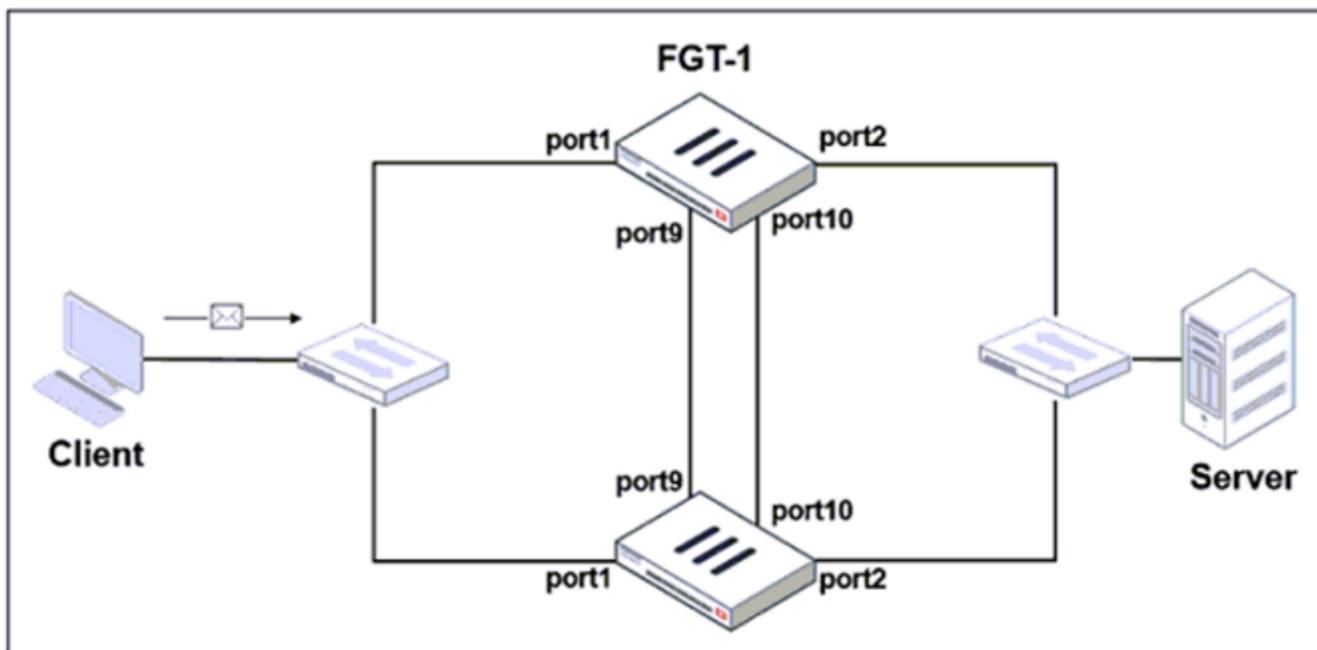

**Exhibit A Exhibit B**

```

set group-id 3
set group-name "NSE"
set mode a-a
set password *
set hbdev "port9" 50 "port10" 50
set session-pickup enable
set override disable
set monitor port3
end

# get system ha status
...
Primary      : FGT-2, FGVM010000065036, HA cluster index = 1
Secondary    : FGT-1, FGVM010000064692, HA cluster index = 0
number of vcluster: 1
vcluster 1: work 169.254.0.2
Primary: FGVM010000065036, HA operating index = 1
Secondary: FGVM010000064692, HA operating index = 0
    
```

Based on the exhibits, which two statements about the traffic passing through the cluster are true? (Choose two.)

- A. For non-load balanced connections, packets forwarded by the cluster to the server contain the virtual MAC address of port2 as source.
- B. The traffic sourced from the client and destined to the server is sent to FGT-1.
- C. The cluster can load balance ICMP connections to the secondary.
- D. For load balanced connections, the primary encapsulates TCP SYN packets before forwarding them to the secondary.

**Answer: AB**

**NEW QUESTION 64**

Refer to the exhibit.



An administrator has configured a performance SLA on FortiGate, which failed to generate any traffic. Why is FortiGate not sending probes to 4.2.2.2 and 4.2.2.1 servers? (Choose two.)

- A. The Detection Mode setting is not set to Passive.
- B. Administrator didn't configure a gateway for the SD-WAN members, or configured gateway is not valid.
- C. The configured participants are not SD-WAN members.
- D. The Enable probe packets setting is not enabled.

**Answer: BD**

**NEW QUESTION 68**

Refer to the exhibit.

```

# diagnose test application ipsmonitor
1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
98: Stop all IPS engines
99: Restart all IPS engines and monitor
    
```

Examine the intrusion prevention system (IPS) diagnostic command.

Which statement is correct If option 5 was used with the IPS diagnostic command and the outcome was a decrease in the CPU usage?

- A. The IPS engine was inspecting high volume of traffic.
- B. The IPS engine was unable to prevent an intrusion attack .
- C. The IPS engine was blocking all traffic.
- D. The IPS engine will continue to run in a normal state.

Answer: A

**NEW QUESTION 72**

An administrator has configured a strict RPF check on FortiGate. Which statement is true about the strict RPF check?

- A. The strict RPF check is run on the first sent and reply packet of any new session.
- B. Strict RPF checks the best route back to the source using the incoming interface.
- C. Strict RPF checks only for the existence of at least one active route back to the source using the incoming interface.
- D. Strict RPF allows packets back to sources with all active routes.

Answer: C

**NEW QUESTION 75**

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scope of application control to the browser-based technology category only.
- B. It limits the scope of application control to scan application traffic based on application category only.
- C. It limits the scope of application control to scan application traffic using parent signatures only.
- D. It limits the scope of application control to scan application traffic on DNS protocol only.

Answer: B

**NEW QUESTION 76**

Which statement about the IP authentication header (AH) used by IPsec is true?


- A. AH does not provide any data integrity or encryption.
- B. AH does not support perfect forward secrecy.
- C. AH provides data integrity but no encryption.
- D. AH provides strong data integrity but weak encryption.

Answer: C

**NEW QUESTION 79**

Refer to exhibit.

An administrator configured the web filtering profile shown in the exhibit to block access to all social networking sites except Twitter. However, when users try to access twitter.com, they are redirected to a FortiGuard web filtering block page.

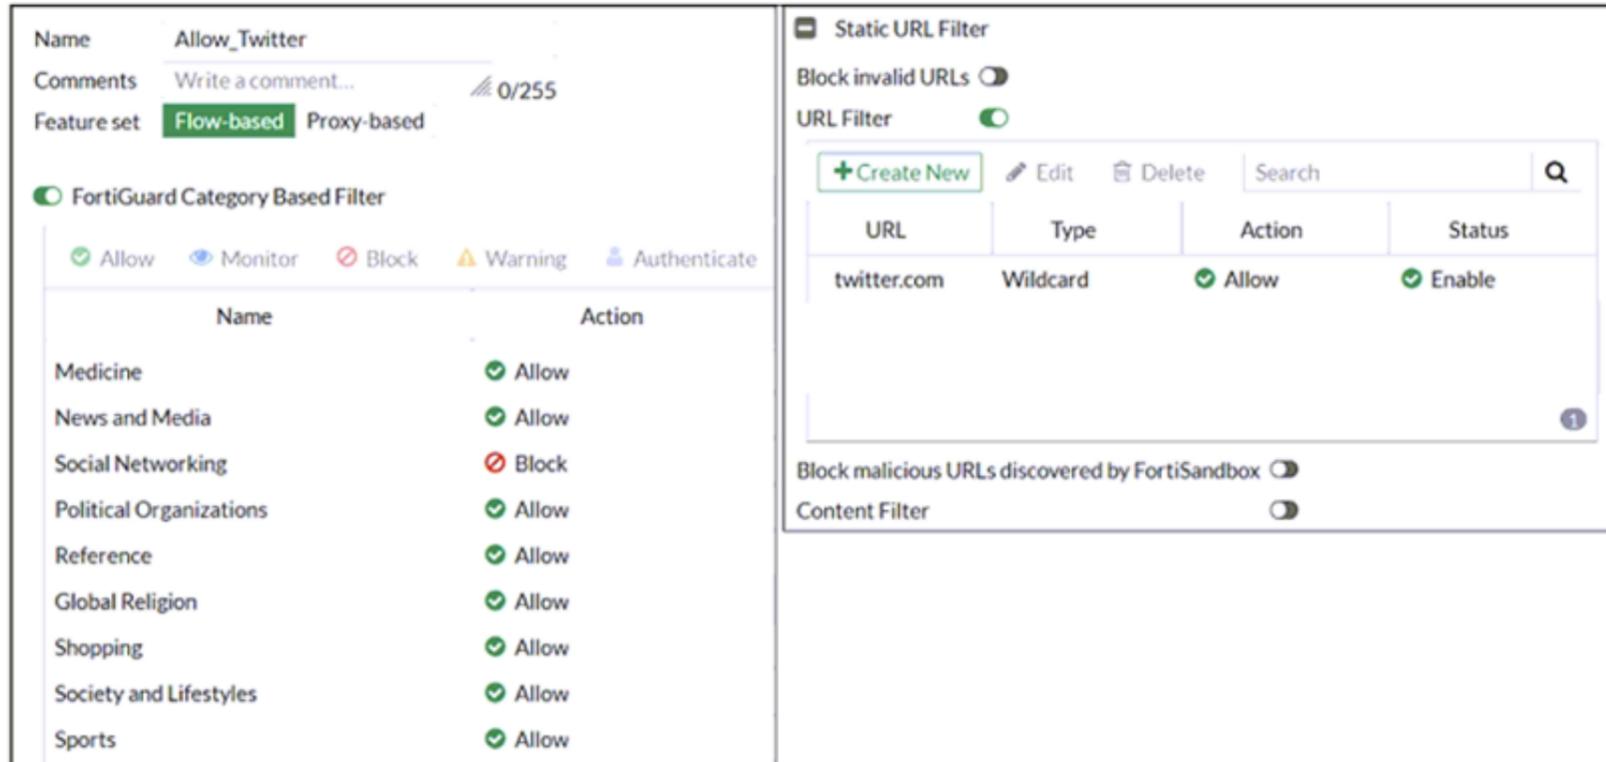

Based on the exhibit, which configuration change can the administrator make to allow Twitter while blocking all other social networking sites?

- A. On the FortiGuard Category Based Filter configuration, set Action to Warning for Social Networking
- B. On the Static URL Filter configuration, set Type to Simple
- C. On the Static URL Filter configuration, set Action to Exempt.
- D. On the Static URL Filter configuration, set Action to Monitor.

Answer: C

**NEW QUESTION 80**

If the Issuer and Subject values are the same in a digital certificate, which type of entity was the certificate issued to?

- A. A CRL
- B. A person
- C. A subordinate CA
- D. A root CA

Answer: D

**NEW QUESTION 81**

An administrator needs to increase network bandwidth and provide redundancy.  
 What interface type must the administrator select to bind multiple FortiGate interfaces?

- A. VLAN interface
- B. Software Switch interface
- C. Aggregate interface
- D. Redundant interface

Answer: C

**NEW QUESTION 83**


Which CLI command will display sessions both from client to the proxy and from the proxy to the servers?

- A. diagnose wad session list
- B. diagnose wad session list | grep hook-pre&&hook-out
- C. diagnose wad session list | grep hook=pre&&hook=out
- D. diagnose wad session list | grep "hook=pre"&"hook=out"

Answer: A

**NEW QUESTION 87**

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

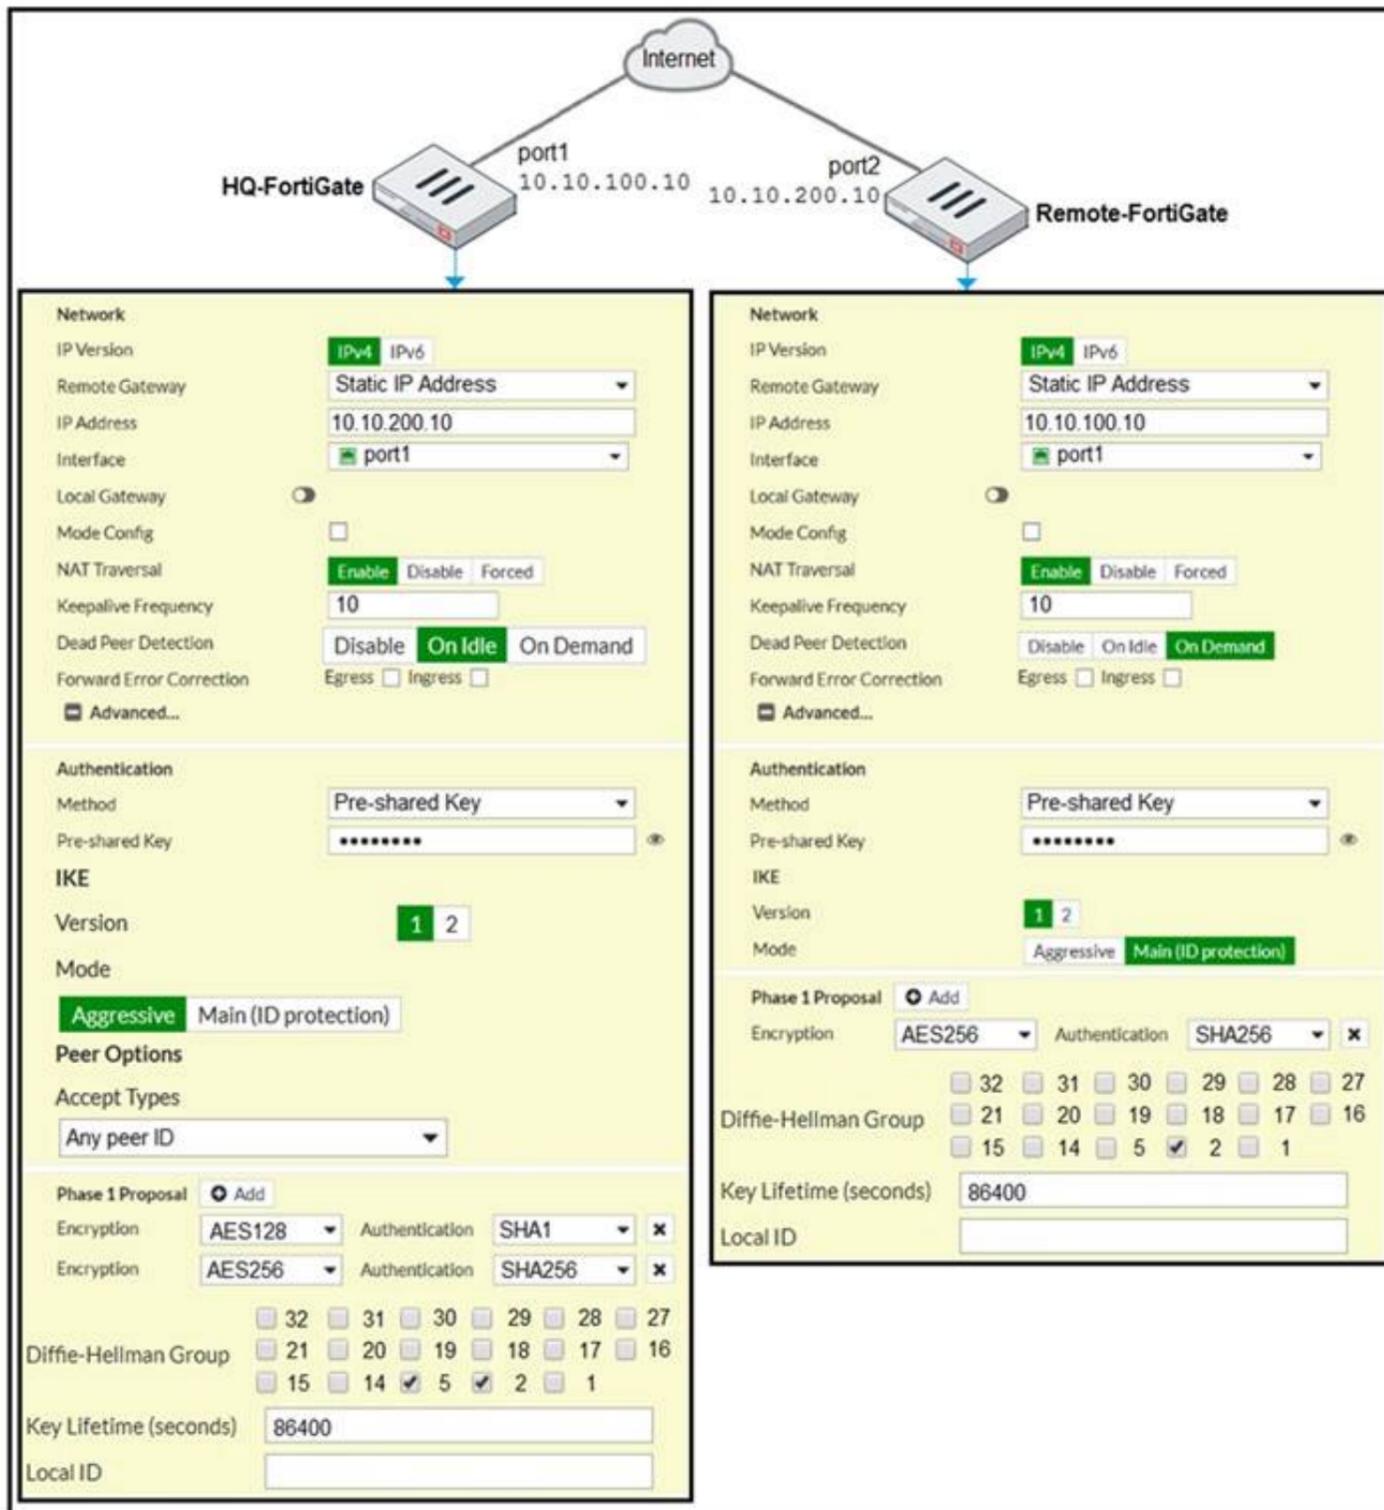

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Helma group 2.
- D. On Remote-FortiGate, set port2 as Interface.

**Answer:** AD

**NEW QUESTION 92**

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **NSE4\_FGT-7.2 Practice Exam Features:**

- \* NSE4\_FGT-7.2 Questions and Answers Updated Frequently
- \* NSE4\_FGT-7.2 Practice Questions Verified by Expert Senior Certified Staff
- \* NSE4\_FGT-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* NSE4\_FGT-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The NSE4\\_FGT-7.2 Practice Test Here](#)**