

Fortinet

Exam Questions NSE4_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2



NEW QUESTION 1

Which statement is correct regarding the use of application control for inspecting web applications?

- A. Application control can identify child and parent applications, and perform different actions on them.
- B. Application control signatures are organized in a nonhierarchical structure.
- C. Application control does not require SSL inspection to identify web applications.
- D. Application control does not display a replacement message for a blocked web application.

Answer: A

NEW QUESTION 2

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

Answer: A

NEW QUESTION 3

What are two benefits of flow-based inspection compared to proxy-based inspection? (Choose two.)

- A. FortiGate uses fewer resources.
- B. FortiGate performs a more exhaustive inspection on traffic.
- C. FortiGate adds less latency to traffic.
- D. FortiGate allocates two sessions per connection.

Answer: AC

NEW QUESTION 4

A network administrator wants to set up redundant IPsec VPN tunnels on FortiGate by using two IPsec VPN tunnels and static routes. All traffic must be routed through the primary tunnel when both tunnels are up. The secondary tunnel must be used only if the primary tunnel goes down. In addition, FortiGate should be able to detect a dead tunnel to speed up tunnel failover. Which two key configuration changes must the administrator make on FortiGate to meet the requirements? (Choose two.)

- A. Configure a higher distance on the static route for the primary tunnel, and a lower distance on the static route for the secondary tunnel.
- B. Configure a lower distance on the static route for the primary tunnel, and a higher distance on the static route for the secondary tunnel.
- C. Enable Auto-negotiate and Autokey Keep Alive on the phase 2 configuration of both tunnels.
- D. Enable Dead Peer Detection.

Answer: AD

NEW QUESTION 5

Refer to the exhibits.
 The exhibits contain a network diagram, and virtual IP, IP pool, and firewall policies configuration information.
 The WAN (port1) interface has the IP address 10.200.1.1/24.
 The LAN (port3) interface has the IP address 10.0.1.254/24.
 The first firewall policy has NAT enabled using IP pool.
 The second firewall policy is configured with a VIP as the destination address.

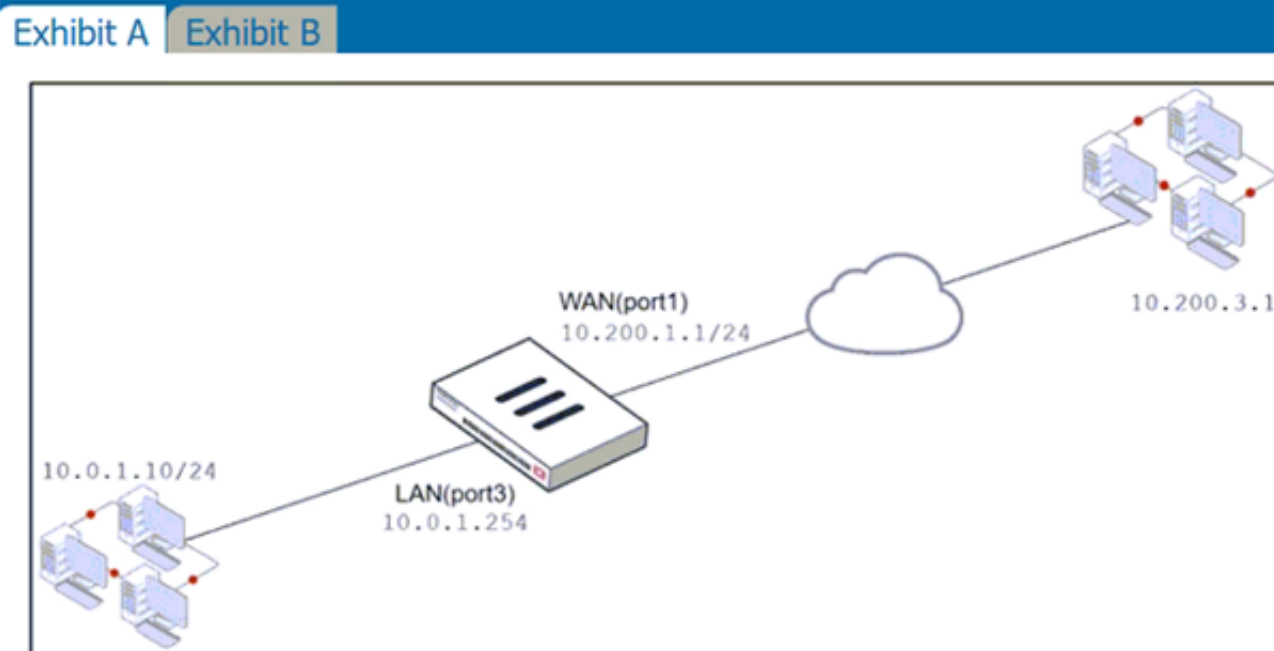


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
Full_Access	LAN (port3)	WAN (port1)	all	all	always	ALL	ACCEPT	IP Pool
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Disabled

Edit Virtual IP

VIP type: IPv4

Name: VIP

Comments: Write a comment... 0/255

Color: Change

Network

Interface: port1

Type: Static NAT

External IP address/range: 10.200.1.10

Map to

IPv4 address/range: 10.0.1.10

☐ Optional Filters

☒ Port Forwarding

Protocol: **TCP** UDP SCTP ICMP

Port Mapping Type: **One to one** Many to many

External service port: 443

Map to IPv4 port: 443

Edit Dynamic IP Pool

Name: IP Pool

Comments: Write a comment... 0/255

Type: **Overload** One-to-One Fixed Port Range Port Block Allocation

External IP address/range: 10.200.1.100-10.200.1.100

NAT64: ☐

ARP Reply: ☒

Which IP address will be used to source NAT (SNAT) the internet traffic coming from a workstation with the IP address 10.0.1.10?

- A. 10.200.1.1
- B. 10.0.1.254
- C. 10.200.1.10
- D. 10.200.1.100

Answer: D

NEW QUESTION 6

Which two settings are required for SSL VPN to function between two FortiGate devices? (Choose two.)

- A. The client FortiGate requires a manually added route to remote subnets.
- B. The client FortiGate requires a client certificate signed by the CA on the server FortiGate.
- C. The server FortiGate requires a CA certificate to verify the client FortiGate certificate.
- D. The client FortiGate requires the SSL VPN tunnel interface type to connect SSL VPN.

Answer: BC

NEW QUESTION 7

Refer to the exhibits.

Exhibit A shows system performance output. Exhibit B shows a FortiGate configured with the default configuration of high memory usage thresholds.

Exhibit A Exhibit B

```
# get system performance status
CPU states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
CPU0 states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
Memory: 2061108k total, 1854997k used (90%), 106111k free (5.1%), 100000k freeable (4.8%)
Average network usage: 83 / 0 kbps in 1 minute, 81 / 0 kbps in 10 minutes, 81 / 0 kbps in 30 minutes
Average sessions: 5 sessions in 1 minute, 3 sessions in 10 minutes, 3 sessions in 30 minutes
Average session setup rate: 0 sessions per second in last 1 minute, 0 sessions per second in last 10 minutes, 0 sessions per second in last 30 minutes
Virus caught: 0 total in 1 minute
IPS attacks blocked: 0 total in 1 minute
Uptime: 10 days, 3 hours, 28 minutes
```

Exhibit A Exhibit B

```
config system global
    set memory-use-threshold-red 88
    set memory-use-threshold-extreme 95
    set memory-use-threshold-green 82
end
```

Based on the system performance output, which two results are correct? (Choose two.)

- A. FortiGate will start sending all files to FortiSandbox for inspection.

- B. FortiGate has entered conserve mode.
- C. Administrators cannot change the configuration.
- D. Administrators can access FortiGate only through the console port.

Answer: BD

NEW QUESTION 8

An administrator has configured the following settings:

```
config system settings
set ses-denied-traffic enable
end
config system global
set block-session-timer 30
end
```

What are the two results of this configuration? (Choose two.)

- A. Device detection on all interfaces is enforced for 30 minutes.
- B. Denied users are blocked for 30 minutes.
- C. The number of logs generated by denied traffic is reduced.
- D. A session for denied traffic is created.

Answer: AC

NEW QUESTION 9

Refer to the exhibit.



```
session info: proto=6 proto_state=02 duration=6 expire=6 timeout=3600 flags=0000
0000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty
statistic(bytes/packets/allow_err): org=180/3/1 reply=264/3/1 tuples=2
tx speed(Bps/kbps): 26/0 rx speed(Bps/kbps): 39/0
origin->sink: org pre->post, reply pre->post dev=3->5/5->3 gwy=10.0.1.11/0.0.0.0
hook=pre dir=org act=dnat 10.200.3.1:38024->10.200.1.11:80(10.0.1.11:80)
hook=post dir=reply act=snat 10.0.1.11:80->10.200.3.1:38024(10.200.1.11:80)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=8 auth_info=0 chk_client_info=0 vd=0
serial=0001fb06 tos=ff/ff app_list=0 app=0 url_cat=0
rpdb_link_id= 00000000 rpdb_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which contains a session diagnostic output. Which statement is true about the session diagnostic output?

- A. The session is in SYN_SENT state.
- B. The session is in FIN_ACK state.
- C. The session is in FTN_WAIT state.
- D. The session is in ESTABLISHED state.

Answer: A

Explanation:

Indicates TCP (proto=6) session in SYN_SENT state (proto=state=2) <https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 10

Which two inspection modes can you use to configure a firewall policy on a profile-based next-generation firewall (NGFW)? (Choose two.)

- A. Proxy-based inspection
- B. Certificate inspection
- C. Flow-based inspection
- D. Full Content inspection

Answer: AC

NEW QUESTION 10


Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS

Answer: CD

NEW QUESTION 11
Refer to the exhibit.

Network Diagram

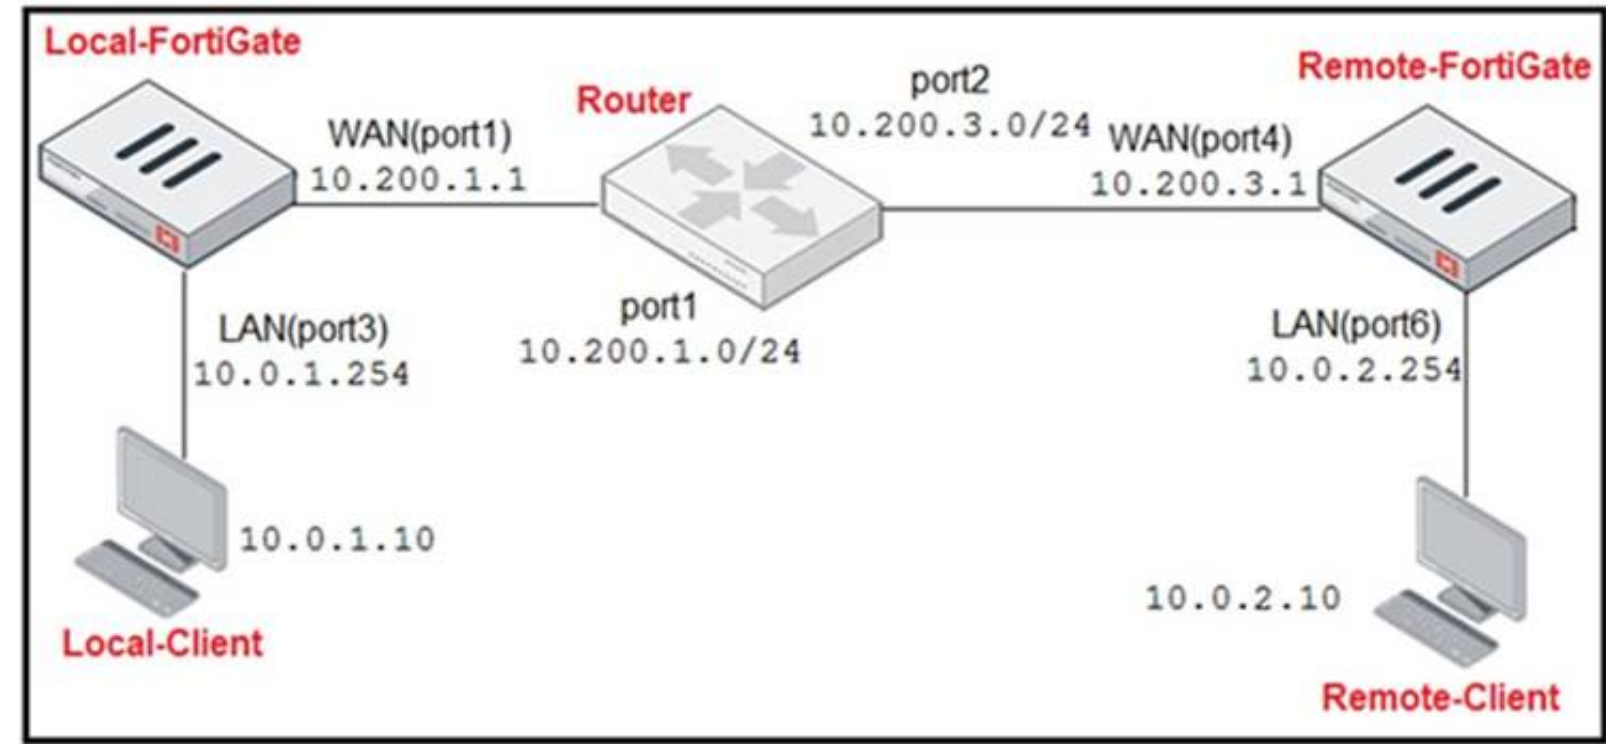

Central SNAT Policies Local-FortiGate

<div> <div>+ Create New</div> <div>Edit</div> <div>Delete</div> <div>Search</div> <div>Q</div> </div>						
ID	From	To	Source Address	Protocol Number	Destination Address	Translated Address
2	LAN(port3)	WAN(port1)	all	6	REMOTE_FORTIGATE	SNAT-Pool
1	LAN(port3)	WAN(port1)	all	1	all	SNAT-Remote1
3	LAN(port3)	WAN(port1)	all	2	all	SNAT-Remote

IP Pool Local-FortiGate

<div> <div>+ Create New</div> <div>Edit</div> <div>Clone</div> <div>Delete</div> <div>Search</div> <div>Q</div> </div>			
Name	External IP Range	Type	ARP Reply
SNAT-Pool	10.200.1.49-10.200.1.49	Overload	Enabled
SNAT-Remote	10.200.1.149-10.200.1.149	Overload	Enabled
SNAT-Remote1	10.200.1.99-10.200.1.99	Overload	Enabled

Protocol Number Table

Protocol Number Table	
Protocol	Protocol Number
TCP	6
ICMP	1
IGMP	2

The exhibit contains a network diagram, central SNAT policy, and IP pool configuration. The WAN (port1) interface has the IP address 10.200. 1. 1/24. The LAN (port3) interface has the IP address 10.0. 1.254/24. A firewall policy is configured to allow to destinations from LAN (port3) to WAN (port1). Central NAT is enabled, so NAT settings from matching Central SNAT policies will be applied. Which IP address will be used to source NAT the traffic, if the user on Local-Client (10.0. 1. 10) pings the IP address of Remote-FortiGate (10.200.3. 1)?

- A. 10.200. 1. 149
- B. 10.200. 1. 1
- C. 10.200. 1.49
- D. 10.200. 1.99

Answer: D

NEW QUESTION 12
Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.

- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

Answer: D

NEW QUESTION 13

Refer to the web filter raw logs.

```
date=2020-07-09 time=12:51:51 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313511250173744 tz="-0400" policyid=1
sessionid=5526 srcip=10.0.1.10 srcport=48660 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web" action="blocked"
reqtype="direct" url="https://twitter.com/" sentbyte=517
rcvdbyte=0 direction="outgoing" msg="URL belongs to a category
with warnings enabled" method="domain" cat=37 catdesc="Social
Networking"

date=2020-07-09 time=12:52:16 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313537024536428 tz="-0400" policyid=1
sessionid=5552 srcip=10.0.1.10 srcport=48698 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web"
action="passthrough" reqtype="direct" url="https://twitter.com/"
sentbyte=369 rcvdbyte=0 direction="outgoing" msg="URL belongs to
a category with warnings enabled" method="domain" cat=37
catdesc="Social Networking"
```

Based on the raw logs shown in the exhibit, which statement is correct?

- A. Social networking web filter category is configured with the action set to authenticate.
- B. The action on firewall policy ID 1 is set to warning.
- C. Access to the social networking web filter category was explicitly blocked to all users.
- D. The name of the firewall policy is all_users_web.

Answer: A

NEW QUESTION 18

Which two statements are correct about a software switch on FortiGate? (Choose two.)

- A. It can be configured only when FortiGate is operating in NAT mode
- B. Can act as a Layer 2 switch as well as a Layer 3 router
- C. All interfaces in the software switch share the same IP address
- D. It can group only physical interfaces

Answer: AC

NEW QUESTION 23

An administrator has configured two-factor authentication to strengthen SSL VPN access. Which additional best practice can an administrator implement?

- A. Configure Source IP Pools.
- B. Configure split tunneling in tunnel mode.
- C. Configure different SSL VPN realms.
- D. Configure host check .

Answer: D

NEW QUESTION 28

An administrator has configured outgoing Interface any in a firewall policy. Which statement is true about the policy list view?

- A. Policy lookup will be disabled.
- B. By Sequence view will be disabled.
- C. Search option will be disabled
- D. Interface Pair view will be disabled.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD47821>

NEW QUESTION 33

Refer to the exhibits.
 Exhibit A.

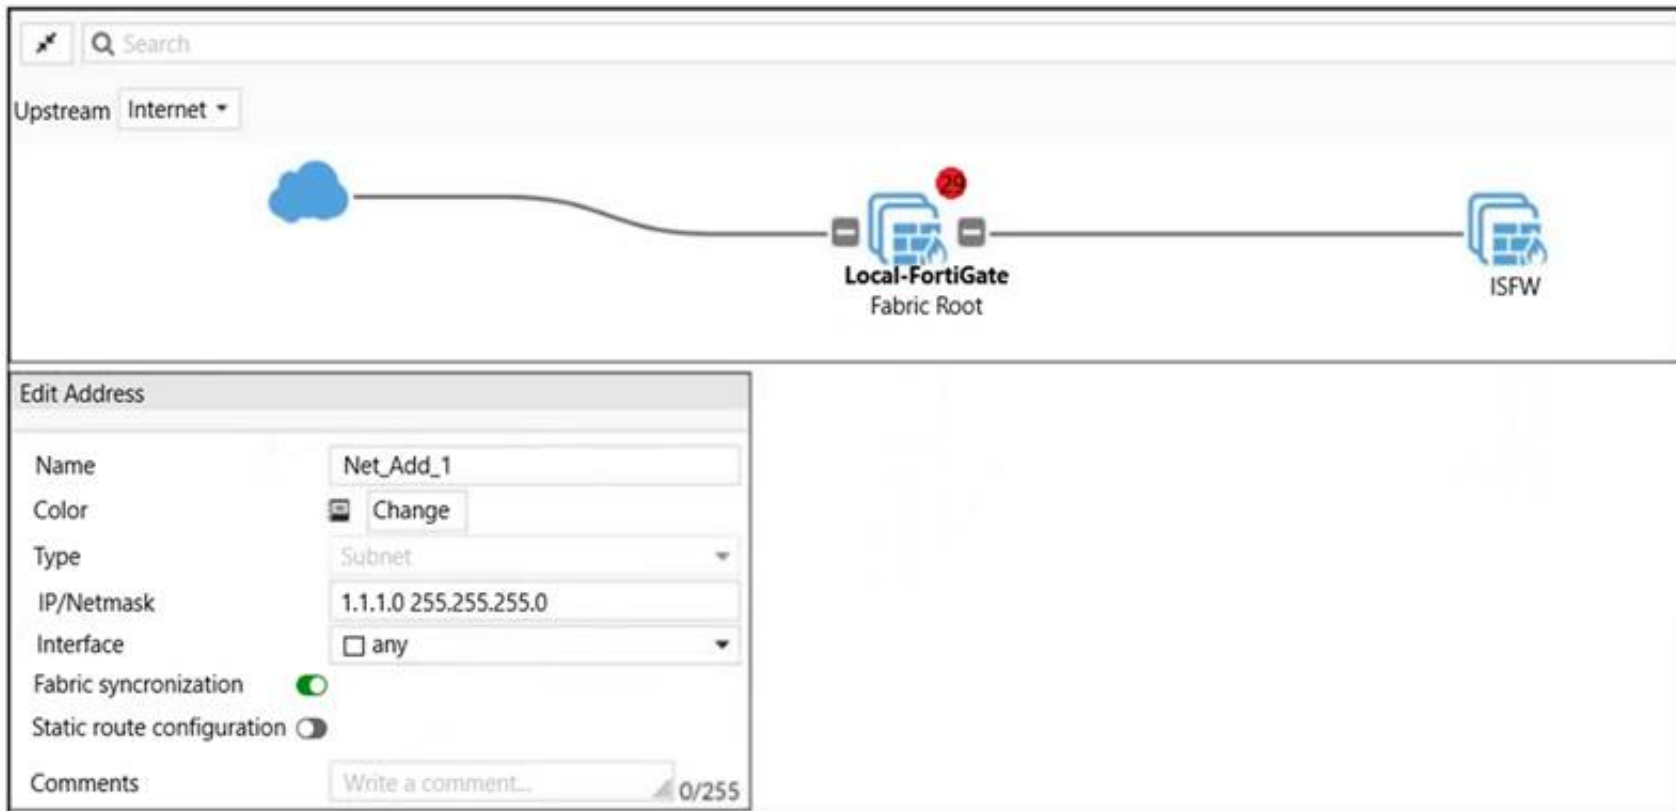


Exhibit B.

```
Local-FortiGate # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 0.0.0.0
    set upstream-port 8013
    set group-name "fortinet"
    set group-password ENC X18CtzrcUBUq9yz9nryP+YfM16
    BJKv7S/trtoh2gYAe5CH8YMAa0GT18aX+/dKH/o5izw1ZEoN1QN2N
    FGLT4r5z2AyYI8i1PxutiLcsCp1AdZadv1CxDe66IdLX7I6o22J9P
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set fabric-object-unification local
    set saml-configuration-sync default
```

```
ISFW # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 10.0.1.254
    set upstream-port 8013
    set group-name ''
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set saml-configuration-sync default
end

ISFW #
ISFW #
```

An administrator creates a new address object on the root FortiGate (Local-FortiGate) in the security fabric. After synchronization, this object is not available on the downstream FortiGate (ISFW).

What must the administrator do to synchronize the address object?

- A. Change the csf setting on Local-FortiGate (root) to set configuration-sync local.
- B. Change the csf setting on ISFW (downstream) to set configuration-sync local.
- C. Change the csf setting on Local-FortiGate (root) to set fabric-object-unification default.
- D. Change the csf setting on ISFW (downstream) to set fabric-object-unification default.

Answer: C

NEW QUESTION 35

When configuring a firewall virtual wire pair policy, which following statement is true?

- A. Any number of virtual wire pairs can be included, as long as the policy traffic direction is the same.
- B. Only a single virtual wire pair can be included in each policy.
- C. Any number of virtual wire pairs can be included in each policy, regardless of the policy traffic direction settings.
- D. Exactly two virtual wire pairs need to be included in each policy.

Answer: A

NEW QUESTION 40

An administrator needs to increase network bandwidth and provide redundancy.
 What interface type must the administrator select to bind multiple FortiGate interfaces?

- A. VLAN interface
- B. Software Switch interface
- C. Aggregate interface
- D. Redundant interface

Answer: C

NEW QUESTION 44

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

NSE4_FGT-7.2 Practice Exam Features:

- * NSE4_FGT-7.2 Questions and Answers Updated Frequently
- * NSE4_FGT-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE4_FGT-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE4_FGT-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE4_FGT-7.2 Practice Test Here](#)