

Microsoft

Exam Questions PL-400

Microsoft Power Platform Developer



NEW QUESTION 1

- (Exam Topic 1)

You need to select connectors for the app.

Which types of connectors should you use? To answer, drag the appropriate connectors to the correct requirements. Each connector may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Connectors	Requirement	Connectors
Create a custom connector.	View full registration records.	
Use an AppSource connector.	View customer names.	
Use a native application function.	View daily registrations.	
Create a connector with a Postman collection.		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Create a custom connector

A custom connector is a wrapper around a REST API (Logic Apps also supports SOAP APIs) that allows Logic Apps, Power Automate, or Power Apps to communicate with that REST or SOAP API.

Box 2: Use an AppSource connector

You can only retrieve the Customer, UnifiedActivity, and Segments entities through the Power Apps connector. Other entities are shown because the underlying connector supports them through triggers in Power Automate.

Scenario: Customer information is stored in the Accounts entity. Box 3: Use a native application function

You must produce a report that details the number of registrations for a day and send the report as a PDF to the management team.

Reference:

<https://docs.microsoft.com/en-us/connectors/custom-connectors/>

<https://docs.microsoft.com/en-us/dynamics365/customer-insights/audience-insights/export-power-apps>

NEW QUESTION 2

- (Exam Topic 1)

You need to add the script for the registration form event handling. Which code segment should you use?

- A. formContext.data.entity.addOnSave(myFunction)
- B. formContext.data.addOnLoad(myFunction)
- C. formContext.data.removeOnLoad(myFunction)
- D. addOnPreProcessStatusChange
- E. formContext.data.isValid()

Answer: B

Explanation:

Scenario: Information about upcoming tournaments must be pre-located into the registration form when the registration form loads.

addOnLoad adds event handlers to the Subgrid OnLoad event event. Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/clientapi/reference/grids/gridcontrol/a>

NEW QUESTION 3

- (Exam Topic 1)

You need to address the user interface issues.

What should you do? To answer, drag the appropriate actions to the correct issues. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Actions	Requirement	Action
Add &ribbondebug=true to the end of the application URL.	Resolve rendering issue for New and Save buttons.	<input type="text"/>
Export the XML file.		
Modify the RibbonWSS.xsd file.	Add email button for registration form.	<input type="text"/>
Use Ribbon Workbench.		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Add &ribbondebug=true to the end of the application URL.

Scenario: The captions for the New and Save buttons do not render properly on the form.

You can use the an in-app tool called the Command Checker to inspect the ribbon component definitions to help us determine why the button is not rendered correctly.

To enable the Command Checker, you must append a parameter &ribbondebug=true to your D365 application URL. For example:

<https://yourorgname.crm.dynamics.com/main.aspx?appid=9ab590fc-d25e-ea11-a81d-000d3ac2b3e6&ribbondeb>

Box 2: Use the Ribbon Workbench Adding Buttons to Ribbons

- > Download and install Ribbon Workbench.
- > Select a suitable ICON for your button.
- > Create a solution.
- > Edit the button in Ribbon Workbench.
- > Publish and test.

Reference:

<https://support.microsoft.com/en-us/help/4552163/ribbon-troubleshooting-guide> <https://neilparkhurst.com/2015/10/19/adding-buttons-to-ribbons/>

NEW QUESTION 4

- (Exam Topic 2)

You need to identify the execution mode that is being used for the ISV solution reported by User5. Which type of execution mode is in use?

- A. asynchronous
- B. atomicity
- C. transfer
- D. synchronous

Answer: D

Explanation:

User5 receives the error message: 'Endpoint unavailable' during a test of the technician dispatch ISV solution. When you choose to use a synchronous execution mode any failure will be reported back to the user of the application with an Endpoint unavailable error dialog informing the user that the webhook service endpoint may be configured incorrectly or is not available.

Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/use-webhooks>

NEW QUESTION 5

- (Exam Topic 2)

You need to ensure that Adventure Works Cycle can track information from visitors to bike fairs. What should you create?

- A. A workflow in Dynamics 365 Sales Engagement for capabilities leads
- B. A flow to capture customer data from the bike fair Power Apps in SharePoint and create a lead in Microsoft Teams.
- C. A flow that connects with the bike fair Power Apps to create a lead in Dynamic 365 Sales
- D. A Microsoft flow that generates a new customer record in SharePoint

Answer: C

Explanation:

By using a Dynamics 365 connector, you can create flows that initiate when an event occurs in Dynamics 365, or some other service, which then performs an action in Dynamics 365, or some other service.

Reference:

<https://docs.microsoft.com/en-us/power-automate/connection-dynamics365>

NEW QUESTION 6

- (Exam Topic 4)

You are creating a model-driven app.

Users need to see only the entities in the app navigation that are relevant to their role and their method of accessing the app.

You need to restrict entities on the sub-areas in the SiteMap.

Which properties should you use? To answer, drag the appropriate properties to the correct requirements. Each property may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Answer Area

Properties	Requirement	Property
Client	Ensure that the entity is visible only if the user can create records.	
Offline Availability	Ensure that the entity is not visible if the user is using an on-premises deployment.	
Privileges	Ensure that the entity is visible only if the user is accessing the app with a web browser.	
SKUs		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Privileges

Privileges: This defines whether a subarea is displayed based on privileges available in any security roles that are assigned to the user.

Box 2: SKU

SKUs: Select the versions of Dynamics 365 that display this subarea. Box 3: Client

Client: Select the type of client that displays this subarea. Reference:

<https://docs.microsoft.com/en-us/powerapps/maker/model-driven-apps/create-site-map-app>

NEW QUESTION 7

- (Exam Topic 4)

You need to complete a PowerApps component framework (PCF) control.

How should you define the order in the manifest? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```

<resources>
  <code path="scripts/HelloWorldControlWave.js" order="1"/>
  <code path="scripts/HelloWorldControlRandom.js" order="2"/>
  <css path="style/HelloWorldControl.css" order="
  <html path="HelloWorldControlWaveRandom.htm" order="
</resources>

```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

The order property specifies the order of a flexible item relative to the rest of the flexible items inside the same container.

Reference: https://www.w3schools.com/jsref/prop_style_order.asp

NEW QUESTION 8

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are designing a one-way integration from the Common Data Service to another system.

You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is

unavailable for more than a few seconds to avoid data loss. You need to design the integration solution.

Solution: Configure the Azure Function with a timer trigger that runs every five minutes. The function will query the Common Data Service and process records created in the last five minutes.

Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Instead use Azure Service Bus queue solution with asynchronous communication. Reference: <https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/azure-integration>

NEW QUESTION 9

- (Exam Topic 4)

A manufacturing company takes online orders.

The company requires automatic validation of order changes. Requirements are as follows:

- > If validation is successful, the order is submitted.
- > If exceptions are encountered, a message must be shown to the customer. You need to set up and deploy a plug-in that encapsulates the rules.

Which options should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Settings	Options
Execution stage	<div style="border: 1px solid black; padding: 5px;"> PreValidation PreOperation PostOperation </div>
Execution mode	<div style="border: 1px solid black; padding: 5px;"> Asynchronous Synchronous </div>
Image	<div style="border: 1px solid black; padding: 5px;"> Pre image Post image </div>
Error message	<div style="border: 1px solid black; padding: 5px;"> <pre>throw new InvalidPluginExecutionException("Your error message", ex); tracingService.Trace("Your error message: {0}", ex.ToString());</pre> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: PreValidation

PreValidation: For the initial operation, this stage will occur before the main system operation.

This provides an opportunity to include logic to cancel the operation before the database transaction. Box 2: Synchronous

Ideally, you should only cancel operations using synchronous plug-ins registered in the PreValidation stage. Box 3: Pre Image

Box 4: throw ..

When you throw an InvalidPluginExecutionException exception within a synchronous plug-in an error dialog with your message will be displayed to the user.

Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/event-framework> <https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/handle-exceptions>

NEW QUESTION 10

- (Exam Topic 4)

A company is building a new model-driven app.

The app must integrate with a number of on-premises and cloud solutions. No VPNs are in place. You need to determine the method for each integration.

Which methods should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Integration

Method

Outbound synchronous calls to a third-party Web API service

▼

- Webhook
- Microsoft Flow
- Azure Event Hub
- Azure Service Bus

Calls to and from a website hosted in Azure with high peak loads

▼

- Plug-in
- Webhook
- Azure Event Hub
- Azure Service Bus

Outbound calls to multiple on-premises and cloud systems to notify of customer address changes

▼

- Plug-in
- Azure Event Hub
- Webhook

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Webhook

With Dataverse, you can send data about events that occur on the service to a web app by using webhooks. A webhook is a lightweight HTTP pattern for connecting web APIs and services with a publish-and-subscribe model. Webhook senders notify receivers about events by making requests to receiver endpoints with some information about the events.

Webhooks enable developers and ISVs to integrate Dataverse data with their own custom code hosted on external services.

Box 2: Azure Service Bus

Service Bus provides a secure and reliable communication channel between Dataverse runtime data and external, cloud-based line-of-business apps. This capability is especially useful in keeping disparate Dataverse systems or other Dataverse servers synchronized with business data changes.

Box 3: Azure Event hub

Azure Event Hubs is a big data streaming platform and event ingestion service. It can receive and process millions of events per second. Data sent to an event hub can be transformed and stored by using any real-time analytics provider or batching/storage adapters.

Note: The most popular approaches in Dataverse involve webhooks, Azure messaging (Service Bus, Event Hubs), Azure Logic Apps, or Power Automate.

Reference:

<https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/why-cds-any-type-app>

NEW QUESTION 10

- (Exam Topic 4)

A company uses SharePoint for its intranet and other functions. The company has also implemented model-driven apps.

SharePoint users must be able to create contact records in the Common Data Service (CDS), without having to navigate to the model-driven apps.

You need to create a link in SharePoint to open the CDS contact from displaying data from SharePoint. How should you complete the URL? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

http://contoso.crm.dynamics.com/ [dropdown] ? [dropdown] =contact&

[dropdown] [dropdown]

[dropdown] =param_1%3DSharePoint&pagetype=[dropdown]

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

https://contoso.crm.dynamics.com/main.aspx?etn=contact&extraqs=param_1%3D&pagetype=entityrecord Box 1: main.aspx

Example, to open the Active Contacts view. https://myorg.crm.dynamics.com/main.aspx?etn=contact&pagetype=entitylist&viewid={00000000-0000-0000-0000-0000-0000-0000-0000-0000} Box 2: etn

Etn: The logical name of the entity. Important: Do not use the etc (entity type code) parameter that contains an integer code for the entity. This integer code varies for custom entities in different organizations.

Box 3: Extraqs

Extraqs: Optional for forms. This parameter contains encoded parameters within this parameter.

When you open a new form by using the URL address, you can include arguments in the extraqs parameter to set field values

Note: You must encode the parameters passed in the extraqs parameter. To encode the parameters, use encodeURIComponent. To use special characters like

"=" or "&" in the parameter values, you must double encode (e.g. to set name to A=B&C, it would be extraqs=name%3DA%253DB%2526C).

Box 4: entityrecord Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/open-forms-views-dialogs-reports-url> <https://docs.microsoft.com/en-us/powerapps/developer/model-driven-apps/set-field-values-using-parameters-pas>

NEW QUESTION 15

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

A Common Data Service (CDS) environment has two custom entities named Building code and Work item. Building code has a code date custom field and Work item has an elapsed time custom field. Construction workers use a consolidated custom form with data from both entities to fill in their daily work items.

A JavaScript library is used with these custom entities and fields to apply complex logic.

You need to ensure that the JavaScript library continues to function as originally designed if other developers expand the environment.

Solution: In the JavaScript library, add Building code with Code date and Work item with Elapsed time in the dependencies tab.

Does the solution meet the goal?


- A. Yes
- B. No

Answer: A

Explanation:

Within a solution you can define dependencies within solution components. Up until Dynamics 365 for Customer Engagement apps version 9.0 the main purpose of these dependencies was to prevent the deletion of a solution component when another solution component depended on it.

The following image shows the dependencies tab within the web resource form. Dependencies between web resources are set in the top list.

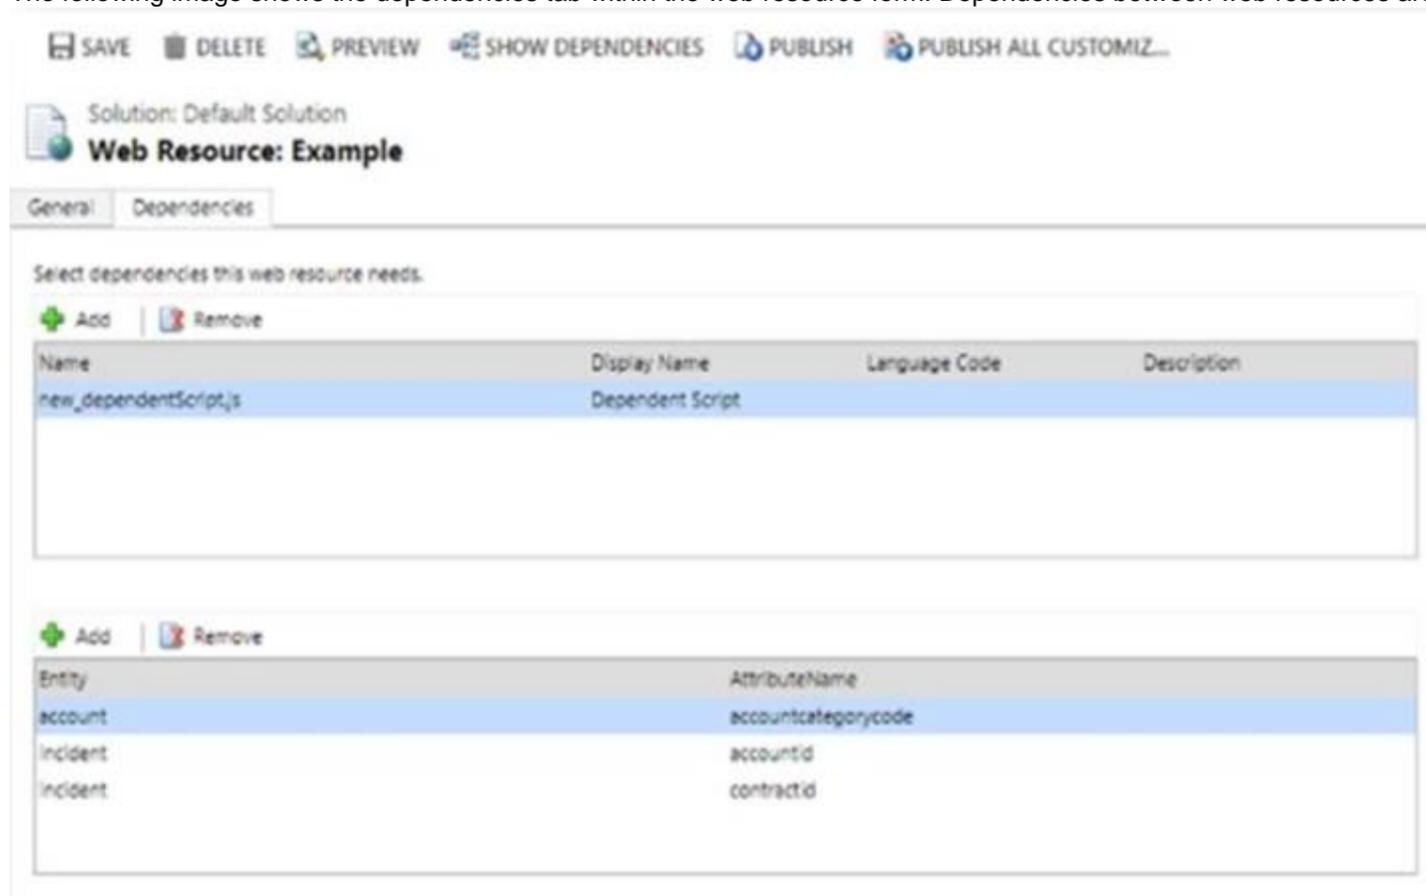

Reference:

<https://docs.microsoft.com/en-us/dynamics365/customerengagement/on-premises/developer/web-resource-depe>

NEW QUESTION 20

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

A university has implemented Dynamics 365 Customer Engagement. Several departments use opportunity records to bid for funding for projects within their own departments.

Each department's opportunities are not visible to other departments. However, there are times when two departments need to work together on an opportunity.

You need to configure the security to meet the business requirements.

Solution: Use access team templates and give access to members in the two departments. Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

Access Team template

The privileges assigned to the access team through Access Team Templates. Access Team template allows you to create a template for the entities on which "Access Teams" option is enabled. You can grant or restrict access to the entity records through "Access Rights". Essentially, this is like a record-based security model on an entity record for specific users.

Once the access team template is created and added to the entity form, you can start adding users. For example, on an opportunity record add a new user in the Access Team Template sub-grid.

Reference:

<https://community.dynamics.com/crm/b/crmdevmigrationconfigandcustomization/posts/access-teams-and-acces>

NEW QUESTION 23

- (Exam Topic 4)

You have a Common Data Service entity and a model-driven app. The model-driven app integrates with an external system.

You plan to run business logic each time the model-driven app creates a record. Running business logic must not negatively affect model-driven app users.

You need to implement the business logic. What should you use?

- A. Synchronous plug-in registered in the PreOperation stage
- B. Synchronous workflow
- C. Asynchronous plug-in registered in the PostOperation stage

Answer: C

Explanation:

The asynchronous service executes long-running operations independent of the main Microsoft Dataverse core operation. This results in improved overall system performance and improved scalability.

Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/asynchronous-service>

NEW QUESTION 25

- (Exam Topic 4)

You are creating a business process flow for an organization's Request for Quote process. You need to ensure that the business process flow meets the company's requirements.

Which components should you use? To answer, drag the appropriate components to the correct requirements. Each component may be used once, more than once, or not at all. You may need to drag the split bar between panes to scroll to view content. Select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Components	Requirement	Component
Step	The process starts with the receipt of the request for quote.	<input type="text"/>
Stage	Ensure that credit checks are performed for new users only.	<input type="text"/>
Custom control	Merge all process paths into the main flow.	<input type="text"/>
Branching condition		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Step

Each step represents a field where data can be entered.

Stages tell you where you are in the process, while steps are action items that lead to a desired outcome. Box 2: Branching condition

You can enhance a business process flow with branching. If you have the create permissions on business

process flows, you'll be able create business process flow with multiple branches by using the If-Else logic. Box 3: Stage

Each stage contains a group of steps. Reference:

<https://docs.microsoft.com/en-us/power-automate/business-process-flows-overview> <https://docs.microsoft.com/en-us/power-automate/enhance-business-process-flows-branching>

NEW QUESTION 29

- (Exam Topic 4)

You are building a custom application in Azure to process resumes for the HR department. The app must monitor submissions of resumes.

You need to parse the resumes and save contact and skills information into the Common Data Service. Which mechanism should you use?

- A. Power Automate
- B. Common Data Service plug-in
- C. Web API
- D. Custom workflow activity

Answer: A

Explanation:

Improve operational efficiency with a unified view of business data by creating flows that use Dataverse (Common Data Service has been renamed to Microsoft Dataverse as of November 2020).

For example, you can use Dataverse within Power Automate in these key ways:

Create a flow to import data, export data, or take action (such as sending a notification) when data changes. Instead of creating an approval loop through email, create a flow that stores approval state in an entity, and

then build a custom app in which users can approve or reject items.

Reference:

<https://docs.microsoft.com/en-us/power-automate/common-data-model-intro>

NEW QUESTION 34

- (Exam Topic 4)

A company plans to replicate a Dynamics 365 Sales database into an Azure SQL Database instance for reporting purposes. The data Export Service solution has been installed. You need to configure the Data service. Which three actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. Create an Azure SQL Database service in the same tenant as the Dynamics 365 Sales environment.
- B. Enable auditing entities that must be replicated to Azure SQL database.
- C. Enable change tracking for all entities that must be replicated to Azure SQL Database.
- D. Set up server-based integration.
- E. Create an export profile that specifies all the entities that must be replicated.

Answer: ACE

Explanation:

Reference:

<https://docs.microsoft.com/en-us/power-platform/admin/replicate-data-microsoft-azure-sql-database>

NEW QUESTION 37

- (Exam Topic 4)

A company delivers packages to businesses and consumers. A custom entity named Package captures the package details. You need to add the following sets of fields to the entity and leverage the built-in operations of the platform:

- > A set of fields to represent the package length, width, depth, and weight. The maximum value for any dimension is 100 centimeters.
- > A set of fields for time-sensitive attributes to calculate the efficiency of a delivery based on when the delivery is entered in the system and the existing custom fields: Pickup time and Delivery time.

Which constructs should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Requirement	Construct
Calculate the efficiency of the delivery.	<div style="border: 1px solid black; padding: 5px;"> <p>DIFFINMINUTES(Created On, Modified On)</p> <p>DIFFINMINUTES(Created On, Delivery Time)</p> <p>DIFFINHOURS(Created On, Modified On)</p> <p>DIFFINHOURS(Created On, Delivery Time)</p> </div>
Select the data type that has additional transformations applied before the data is displayed.	<div style="border: 1px solid black; padding: 5px;"> <p>Autonumber</p> <p>Phone number</p> <p>Customer</p> <p>Currency</p> <p>Duration</p> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: DIFFINMINUTES(Created on, Delivery Time)

DIFFINMINUTES (date and time, date and time) returns the difference in minutes between two Date and Time columns.

Box 2: Duration Reference:

<https://docs.microsoft.com/en-us/powerapps/maker/common-data-service/define-calculated-fields>

NEW QUESTION 40

- (Exam Topic 4)

A company is creating a Power Apps portal to collaborate with vendors.

You need to implement custom functionality in the portal by using JavaScript code. Which two portal entities can you use? Each correct answer presents a complete solution. NOTE: Each correct selection is worth one point.

- A. Web pages
- B. Web resources
- C. Webforms
- D. Entity lists

Answer: CD

Explanation:

C: The Web Form Step record contains a field named Custom JavaScript that can be used to store JavaScript code to allow you to extend or modify the form's visual display or function.

D: You can add custom Javascripts to Entity lists. Reference:

<https://docs.microsoft.com/en-us/powerapps/maker/portals/configure/add-custom-javascript> <https://docs.microsoft.com/en-us/powerapps/maker/portals/configure/entity-lists#add-custom-javascript>

NEW QUESTION 45

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than once correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are designing a one-way integration from the Common Data Service to another system.

You must use an Azure Function to update the other system. The integration must send only newly created records to the other system. The solution must support scenarios where a component of the integration is unavailable for more than a few seconds to avoid data loss.

You need to design the integration solution.

Solution: Register a service endpoint in the Common Data Service that connects to an Azure Service Bus queue.

Register a step at the endpoint which runs asynchronously on the record's Create message and in the portoperation stage.

Configure the Azure Function to process records as they are added to the queue. Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

Microsoft Dataverse supports integration with Azure.

For the Dataverse and Azure connection to work, there must be at least one solution in an Azure Service Bus solution account, where the solution contains one or more service endpoints.

For a queue endpoint contract, a listener doesn't have to be actively listening. Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/azure-integration>

NEW QUESTION 46

- (Exam Topic 4)

A client requires that the system send an email from a button on their customer contact form. You need to call the action from JavaScript.

Which two functions achieve this result? Each correct presents a complete solution. NOTE: Each correct selection is worth one point.

- A. Xrm.WebApi.online.createRecord()
- B. Xrm.WebApi.online.updateRecord()
- C. Xrm.WebApi.online.execute()
- D. Xrm.WebApi.online.executeMultiple()

Answer: C

Explanation:

You can execute action using Xrm.WebApi.online.execute in Dynamics 365 CRM V9.0. Reference:

<https://cardesouza.com/calling-a-dynamics-365-action-from-javascript-using-xrm-webapi-online-execute/>

NEW QUESTION 49

- (Exam Topic 4)

User1 and User2 use a form named F1 to enter account data. Both users have the same security role, SR1, in the same business unit.

User1 has a business rule to make the main phone mandatory if the relationship type is Reseller. User2 must occasionally create records of the Reseller type without having the reseller's phone number and is blocked by User1's business rule.

You need to ensure that User2 can enter reseller data into the system.

Which three actions should perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct order you select.

Actions	Answer Area
Copy the security role as SR2. Assign the SR2 security to User2 and remove the original security role SR1.	
Open form F1 and save it as a form named F2.	
Remove the business role from form F2.	⏪ ⏩
Set the SR1 security role to be the only role for form F1 and the SR2 role to be the only role for form F2.	⏪ ⏩
Create a business rule for form F2 to make the phone number optional for resellers.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Actions	Answer Area
Copy the security role as SR2. Assign the SR2 security to User2 and remove the original security role SR1.	Open form F1 and save it as a form named F2.
Open form F1 and save it as a form named F2.	Remove the business role from form F2.
Remove the business role from form F2.	Create a business rule for form F2 to make the phone number optional for resellers.
Set the SR1 security role to be the only role for form F1 and the SR2 role to be the only role for form F2.	
Create a business rule for form F2 to make the phone number optional for resellers.	

NEW QUESTION 50

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

An organization has an Azure SQL Database instance that must be synchronized daily with data from Dynamics 365 Sales. A large amount of data might need to be synchronized on some days.

You need to reduce the time required to synchronize data. Solution:

Enable change tracking for entities that will be synchronized.

Use the Data Export Service to sync data between the database and Dynamics 365 Sales. Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

Large organizations that synchronize their data with external data sources can now enable entities for change tracking. You can export or retrieve a selected set of data, and then keep the external data warehouse in sync.

The Data Export Service is an add-on service made available on Microsoft AppSource that adds the ability to replicate data from Common Data Service database to an Azure SQL Database store in a customer-owned Azure subscription.

The Data Export Service intelligently synchronizes the entire data initially and thereafter synchronizes on a continuous basis as changes occur (delta changes) in the system.

You can use the Data Export Service with model-driven apps in Dynamics 365, such as Dynamics 365 Sales and Dynamics 365 Customer Service.

Reference:

<https://docs.microsoft.com/en-us/power-platform/admin/enable-change-tracking-control-data-synchronization> <https://docs.microsoft.com/en-us/power-platform/admin/replicate-data-microsoft-azure-sql-database>

NEW QUESTION 52

- (Exam Topic 4)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

An organization has an Azure SQL Database instance that must be synchronized daily with data from Dynamics 365 Sales. A large amount of data might need to be synchronized on some days.

You need to reduce the time required to synchronize data. Solution:

- > Enable change tracking for entities that will be synchronized.
- > Implement a console application that queries for changes.

Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Instead use the Data Export Service to sync data between the database and Dynamics 365 Sales. References:

<https://docs.microsoft.com/en-us/power-platform/admin/enable-change-tracking-control-data-synchronization>

NEW QUESTION 53

- (Exam Topic 4)

A company implements Dynamics 365 Customer Service. The company deploys synchronous plug-ins for the PreOperation and PostOperation stages on create and for the PostOperation stage on update for processing different case type.

Users experience errors when updating cases. The plug-in trace log files show that the PosOperation plug-in update of case times out after two minutes. You perform basic testing and discover that this plug-in is triggered on every update of a case. You examine the code and discover that the plug-in retrieves all columns for the updated case record performing its work. You need to reduce the number of errors. You need to achieve this goal with the test amount of changes. Solution: In the Plug-in Registration tool, update the plug-in step and increase the Execution Order. Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 56

- (Exam Topic 4)

A company uses Dynamics 365 Sales and the Microsoft Online Services portal. The multi-select OptionSet field data type is not supported in the portal. You need to copy the selected field value to the text field.

How should you configure the Organization service request? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```
Entity entity = (Entity)context.InputParameters["Target"];
var attributeRequest = new RetrieveAttributeRequest
{
    EntityLogicalName = "entityname",
    LogicalName = "fieldname",

    RetrieveAsIfPublished = 
};

var attributeResponse = (RetrieveAttributeResponse)
service.Execute(attributeRequest);
var attributeMetadata =
(EnumAttributeMetadata)attributeResponse.
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

If you are creating an attribute editor you will need to retrieve entity data that has been saved but not published. For other scenarios you will want to only retrieve published metadata.

- > Set this value to true to include unpublished changes, as it would look if you called publish.
- > Set this value to false to include only the currently published changes, ignoring the changes that haven't yet been published.

Box 2: AttributeMetadata

AttributeMetadata class is returned in the RetrieveAttributeResponse. Reference:

<https://docs.microsoft.com/en-us/dotnet/api/microsoft.xrm.sdk.messages.retrieveattributerequest.retrieveasifpubl> <https://docs.microsoft.com/en-us/dotnet/api/microsoft.xrm.sdk.metadata.attributemetadata?view=dynamics-gene>

NEW QUESTION 61

- (Exam Topic 4)

An organization has a Dynamics 365 Sales environment. You need to create a Power Apps component.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Answer Area

Run the following `npm run build` command.

Run the `pac pcf init --namespace SampleNamespace --name ControlName --template field` command

Run the `pac solution init --publisher-name developer --publisher-prefix dev` command.



Run the `npm install` command.

Create a project folder.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Run `pac pcf init --namespace ..`

This is the first command which creates basic folder structure of PCF control project. Run the following command to create the control. The format of the control is:
`pac pcf init --namespace <specify your namespace here> --name <put component name here> --template <component type>`

Step 2: Run the `npm install` command Install Dependencies

Once 'init' sets up the basic folder, as a next step install all the PCF control dependencies using 'npm install' command.

Example:

```
C:\source\PCF\HelloWorld>npm install
npm WARN deprecated opn@6.0.0: The package has been renamed to 'open'
npm WARN pcf-project@1.0.0 No repository field.
npm WARN pcf-project@1.0.0 No license field.
npm WARN optional SKIPPING OPTIONAL DEPENDENCY: fsevents@1.2.9 (node_modules\fsevents):
npm WARN notsup SKIPPING OPTIONAL DEPENDENCY: Unsupported platform for fsevents@1.2.9: wanted {"os":"darwin","arch":"any"} (current: {"os":"win32","arch":"x64"})

added 653 packages from 497 contributors and audited 10328 packages in 19.295s
found 0 vulnerabilities
```

Now at this point, there is nothing we have actually created. However, the solution created contains sample PCF control code.

Step 3: Run the following `npm run build` command Build PCF Component.

Once you implement the PCF component, build the code for any syntax errors. Syntax:

`npm run build`

```
> pcf-scripts build

[17:54:6] [build] Initializing...
[17:54:6] [build] Validating manifest...
[17:54:6] [build] Validating control...
[17:54:6] [build] Generating manifest types...
[17:54:6] [build] Compiling and bundling control...
[Webpack stats]:
Hash: 7836f673449072fa8d61
Version: webpack 4.28.4
Time: 1153ms
Built at: 10/02/2019 5:54:08 PM
   Asset      Size  Chunks             Chunk Names
bundle.js  6.34 KiB       0  [emitted]  main
Entrypoint main = bundle.js
[./HelloWorld/index.ts] 2.34 KiB {main} [built]
[17:54:8] [build] Generating build outputs...
[17:54:8] [build] Succeeded
```

Reference:

<https://rajeevpenyala.com/2020/03/21/power-apps-component-framework-pcf-demystify/> <https://carldesouza.com/creating-a-custom-component-using-the-powerapps-component-framework/>

NEW QUESTION 62

- (Exam Topic 4)

You have the following code:

```
Xrm.WebApi.createRecord("account", data).then(
    function success(result) {
        console.log("Success");
    },
    function (error) {
        console.log(error.message);
    }
);
```

You have a contact record that uses the GUID 2CFB1599-DEAD-425F-AB4A-76E6CAB51B09.

You need to assign the contact record as the primary contact for an account when you create the account. Which two code segments can you use? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A.

```
var data =
{
    "name": "Contoso account",
    "primarycontactid@odata.context": "/contacts(2CFB1599-DEAD-425F-AB4A-76E6CAB51B09)"
};
```
- B.

```
var data =
{
    "name": "Contoso account",
    "primarycontactid":
    {
        "logicalname": "contact",
        "id": "2CFB1599-DEAD-425F-AB4A-76E6CAB51B09"
    }
};
```
- C.

```
var data =
{
    "name": "Contoso account",
    "primarycontactid@odata.bind": "/contacts(2CFB1599-DEAD-425F-AB4A-76E6CAB51B09)"
};
```
- D.

```
var data =
{
    "name": "Contoso account",
    "primarycontactid": "/contacts(2CFB1599-DEAD-425F-AB4A-76E6CAB51B09)"
};
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: BC

NEW QUESTION 65

- (Exam Topic 4)

You work for a multinational company that has Azure and Common Data Service environment in the United States (UTC-7) and Japan (UTC+9).

You create Azure Functions for each location to update key data.

You need to configure the functions to run at 4:00 AM on weekdays at each location.

Which schedule formats should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Location	Timer schedule
United States	<div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 4 * * 1-5"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 7 * * 0-4"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 11 * * 1-5"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 19 * * 0-4"/> </div>
Japan	<div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 19 * * 0-4"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 4 * * 1-5"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 7 * * 1-5"/> </div> <div style="border: 1px solid black; padding: 5px;"> <input type="text" value="00 11 * * 0-4"/> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 0 0 4 * * 1-5

Azure Functions uses the NCronTab library to interpret NCRONTAB expressions.

An NCRONTAB expression is similar to a CRON expression except that it includes an additional sixth field at the beginning to use for time precision in seconds:

{second} {minute} {hour} {day} {month} {day-of-week} NCRONTAB time zones

The numbers in a CRON expression refer to a time and date, not a time span. For example, a 5 in the hour field refers to 5:00 AM, not every 5 hours.

The default time zone used with the CRON expressions is Coordinated Universal Time (UTC).

To have your CRON expression based on another time zone, create an app setting for your function app named WEBSITE_TIME_ZONE.

1-5 is weekdays

Box 2: 0 0 4 * * 1-5 Reference:

<https://docs.microsoft.com/en-us/azure/azure-functions/functions-bindings-timer?>

NEW QUESTION 70

- (Exam Topic 4)

A company uses the Data Export Service (DCS) to refresh their Azure SQL Data Warehouse instance. The data warehouse is used for historical trend analysis and forecasting.

The refresh process from the Common Data Service (CDS) environment to the data warehouse has errors. Users report that data is missing.

A CDS test environment that contains DES is available to troubleshoot the import outside of the production environment. You create a new database for testing.

You need to configure the test environment to point to the new database. What should you create first to access the database?

- A. A new secret in Azure Key Vault
- B. A new user in the SQL database
- C. A new export profile in CDS test
- D. A new application registration

Answer: A

Explanation:

Because this service requires access to an external Microsoft Azure SQL Database from Dynamics 365 (online), a number of prerequisites must be satisfied before you can successfully access this service including:

➤ Global / Tenant Admin access, or an Azure Key Vault must be provisioned and the setup user must have permissions on Secrets.

Reference:

<https://blog.crgroup.com/dynamics-365-latest-feature-the-data-export-service/>

NEW QUESTION 73

- (Exam Topic 4)

A client uses a model-driven app that is deployed by using a managed solution in the production environment. The app contains only entities and UI components and has no custom code or extensions to the platform.

The client needs an exact copy of the app with a different name in the production environment. You need to recreate this app in production without disrupting the end users.

What should you do?

- A. Select the original model-driven app, select Edit, and then select Save As.
- B. Create a new model-driven app
- C. Select the Use existing solution to create the App check box, and then select the solution that contains the original app.
- D. Select the managed solution and select Clone.
- E. Create a new model-driven app, manually add each component, and then recreate its original functions.
- F. Add the original app to a solution, export it as unmanaged, import it into a test environment and rename it, and then deploy it back into production.

Answer: B

Explanation:

The option Use existing solution allow users to select a specific solution for this app. Users can create a whole new design from scratch by not checking check box of use existing solution.

Reference:

<https://www.inogic.com/blog/2019/02/create-model-driven-app-cds-environment/>

NEW QUESTION 74

- (Exam Topic 4)

A company uses five different shipping companies to deliver products to customers. Each shipping company has a separate service that quotes delivery fees for destination addresses.

You need to design a custom connector that retrieves the shipping fees from all the shipping companies by using their APIs.

Which three elements should you define for the custom connector? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Authentication model
- B. Address parameter
- C. OpenAPI definition
- D. Fee parameter
- E. Fee reference

Answer: ABC

Explanation:

C: You can create a custom connector using a OpenAPI definition file or a URL to OpenAPI definition. B: On the Security page you get to choose how to authenticate to the API.

← Connector Name Trefle

1. General > 2. Security > 3. Definition > 4. Test ✓ Create connector ✕ Cancel

Security

Choose the authentication type and fill in the required fields to set the security for your custom connector. [Learn more](#)

Authentication type

Choose what authentication is implemented by your API *

API Key

[Edit](#)

API Key

Users will be required to provide the API Key when creating a connection

Parameter label *

API Key

Parameter name *

API-nyckel

Parameter location *

Header

[Edit](#)

← General Definition →

A: If you were to create a Custom Connector from scratch, then you would have to study the API you have chosen and type in the URL manually here.

Request
+ Import from sample

Verb *
The verb describes the operations available on a single path.

GET

URL *
This is the request URL.

`https://trefle.io/api/plants/{id}`

Path
Path is used together with Path Templating, where the parameter value is actually part of the operation's URL.

* id ...

Query
Query parameters are appended to the URL. For example, in /items?id=###, the query parameter is id.

* token ...

Headers
These are custom headers that are part of the request.

Body
The body is the payload that's appended to the HTTP request. There can only be one body parameter.

Reference:

<https://carinaclaesson.com/2019/09/06/setting-up-a-custom-connector-from-an-openapi-file-and-utilizing-it-in-p>

NEW QUESTION 75

- (Exam Topic 4)

You need to develop a set of Web API's for a company.

What should you implement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Requirement	Operation
Implement operations that do not have side effects and may support further composition	<div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; margin-bottom: 5px;">▼</div> <div style="border-bottom: 1px solid black; padding: 2px;">Functions</div> <div style="border-bottom: 1px solid black; padding: 2px;">Actions</div> <div style="padding: 2px;">Entities</div> </div>
Implement operations that allow side effects, such as data modification	<div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; margin-bottom: 5px;">▼</div> <div style="border-bottom: 1px solid black; padding: 2px;">Functions</div> <div style="border-bottom: 1px solid black; padding: 2px;">Actions</div> <div style="padding: 2px;">Entities</div> </div>
Implement keyless named structure types that consist of a set of properties	<div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; margin-bottom: 5px;">▼</div> <div style="border-bottom: 1px solid black; padding: 2px;">Complex types</div> <div style="border-bottom: 1px solid black; padding: 2px;">Entity types</div> <div style="padding: 2px;">Enumeration types</div> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Functions

most functions and services that are stateless and do not have side effects. Box 2: Actions

Actions can have side effects. Box 3: Complex types

Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/webapi/use-web-api-actions>

NEW QUESTION 76

- (Exam Topic 4)

A company uses Common Data Service (CDS) and manages their engineers using a model-driven app. You create a new reusable custom component using the PowerApps component framework (PCF).

You need to package the custom component to be deployed into the model-driven app.

Which three commands should you run in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Answer Area
npm install	
msbuild /t:build /restore	
npm start	<div style="display: flex; justify-content: center; gap: 10px;"> ⬅ ➡ </div>
npm run build	<div style="display: flex; justify-content: center; gap: 10px;"> ⬆ ⬇ </div>
pac solution add-reference -path <control path>	
pac solution init -publisher-name <publisher> --publisher-prefix <prefix>	
pac pcf init --namespace <namespace> --name <control name> --template field	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: npm install Install Npm

Step 2: pac pcf init ..

Commands for working with Power Apps component framework. It has the following parameters:

- init: Initializes the code component project. It has the following parameters
- namespace: Namespace of the code component.
- name: Name of the code component.
- template: Field or dataset

Step 3: pac solution add-reference

Commands for working with Common Data Service solution projects. It has the following parameters: add-References:

Sets the reference path to the component project folder by passing the path parameter.

Syntax: pac solution add-reference --path <path to your Power Apps component framework project> Reference:

<https://docs.microsoft.com/en-us/powerapps/developer/common-data-service/powerapps-cli>

NEW QUESTION 80

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

PL-400 Practice Exam Features:

- * PL-400 Questions and Answers Updated Frequently
- * PL-400 Practice Questions Verified by Expert Senior Certified Staff
- * PL-400 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * PL-400 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The PL-400 Practice Test Here](#)