



Oracle

Exam Questions 1z0-808

Java SE 8 Programmer I

NEW QUESTION 1

Given:

```
public static void main(String[] args) {
    String ta = "A ";
    ta = ta.concat("B ");
    String tb = "C ";
    ta = ta.concat(tb);
    ta.replace('C', 'D');
    ta = ta.concat(tb);
    System.out.println(ta);
}
```

What is the result?

- A. A B C D
- B. A C D
- C. A C D D
- D. A B D
- E. A B D C

Answer: C

NEW QUESTION 2

Given the following classes:

```
public class Employee {
    public int salary;
}

public class Manager extends Employee {
    public int budget;
}

public class Director extends Manager {
    public int stockOptions;
}
```

And given the following main method:

```
public static void main(String[] args) {
    Employee employee = new Employee();
    Manager manager = new Manager();
    Director director = new Director();
    //line n1
}
```

Which two options fail to compile when placed at line n1 of the main method? (Choose two.)

- A. employee.salary = 50_000;
- B. director.salary = 80_000;
- C. employee.budget = 200_000;
- D. manager.budget = 1_000_000;
- E. manager.stockOption = 500;
- F. director.stockOptions = 1_000;

Answer: CE

NEW QUESTION 3

Given the code fragments:

Person.java:

```
public class Person {
    String name;
    int age;

    public Person(String n, int a) {
        name = n;
        age = a;
    }

    public String getName() {
        return name;
    }

    public int getAge() {
        return age;
    }
}
```

Test.java:

```
public static void checkAge(List<Person> list, Predicate<Person> predicate) {
    for (Person p : list) {
        if (predicate.test(p)) {
            System.out.println(p.name + " ");
        }
    }
}

public static void main(String[] args) {
    List<Person> iList = Arrays.asList(new Person("Hank", 45),
                                       new Person("Charlie", 40),
                                       new Person("Smith", 38));

    //line n1
}
```

Which code fragment, when inserted at line n1, enables the code to print Hank?

- A `checkAge (iList, () -> p. get Age () > 40);`
- B `checkAge(iList, Person p -> p.getAge() > 40);`
- C `checkAge (iList, p -> p.getAge () > 40);`
- D `checkAge(iList, (Person p) -> { p.getAge() > 40; });`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 4

Given the code fragment:

```
public static void main (String[] args) {
    String[] arr = ("Hi", "How", "Are", "You");
    List<String> arrList = new ArrayList<>(Arrays.asList(arr));
    if (arrList.removeIf((String s) -> (return s.length() <= 2;))) {
        System.out.println(s + "removed")
    }
}
```

What is the result?

- A. Compilation fails.
- B. Hi removed
- C. An UnsupportedOperationException is thrown at runtime.
- D. The program compiles, but it prints nothing.

Answer: A

NEW QUESTION 5

Given:

```
public class Test {
    public static void main(String[] args) {
        int x = 1;
        int y = 0;
        if(x++ > ++y) {
            System.out.print("Hello ");
        } else {
            System.out.print("Welcome ");
        }
        System.out.print("Log " + x + ":" + y);
    }
}
```

What is the result?

- A. Hello Log 1:0
- B. Hello Log 2:1
- C. Welcome Log 2:1
- D. Welcome Log 1:0

Answer: C

NEW QUESTION 6

Given:


```
public class Test {
    public static void main(String[] args) {
        Test ts = new Test();
        System.out.print(isAvailable + " ");
        isAvailable= ts.doStuff();
        System.out.println(isAvailable);
    }
    public static boolean doStuff() {
        return !isAvailable;
    }
    static boolean isAvailable = true;
}
```

What is the result?

- A. Compilation fails.
- B. false true
- C. true false
- D. true true
- E. false false

Answer: C

Explanation:

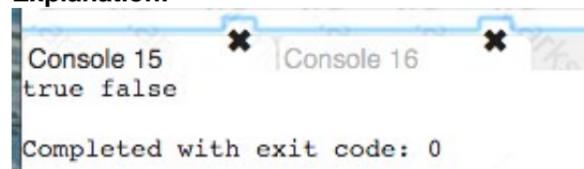

```
Console 15 | Console 16
true false
Completed with exit code: 0
```

NEW QUESTION 7

Which statement is true about the switch statement?

- A. It must contain the default section.
- B. The break statement, at the end of each case block, is mandatory.
- C. Its case label literals can be changed at runtime.
- D. Its expression must evaluate to a single value.

Answer: D

NEW QUESTION 8

Given:

```
class A {
    public void test () {
        System.out.println ("A");
    }
}
class B extends A {
    public void test () {
        System.out.println ("B");
    }
}
public class C extends A {
    public void test () {
        System.out.println ("C");
    }
}

public static void main (String [] args) {
    A b1 = new A ();
    A b2 = new C ();

    b1 = (A) b2;           //line n1
    A b3 = (B) b2;        //line n2
    b1.test ();
    b3.test ();
}
}
```

What is the result?

- A. AB
- B. AC
- C. CC
- D. A ClassCastException is thrown only at line n1.
- E. A ClassCastException is thrown only at line n2.

Answer: B

NEW QUESTION 9

Given the code from the Greeting.java file:

```
public class Greeting {
    public static void main(String[] args) {
        System.out.println("Hello " + args[0]);
    }
}
```

Which set of commands prints Hello Duke in the console?

- A) javac Greeting
java Greeting Duke
- B) javac Greeting.java Duke
java Greeting
- C) javac Greeting.java
java Greeting Duke
- D) javac Greeting.java
java Greeting.class Duke

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 10

Given these two classes:

```
public class Customer {
    ElectricAccount acct = new ElectricAccount ();

    public void useElectricity(double kWh) {
        acct.addKWh(kWh);
    }
}

public class ElectricAccount {
    private double kWh;
    private double rate = 0.07;
    private double bill;

    //line n1
}
```

Any amount of electricity used by a customer (represented by an instance of the Customer class) must contribute to the customer's bill (represented by the member variable bill) through the useElectricity method.

An instance of the Customer class should never be able to tamper with or decrease the value of the member variable bill.

How should you write methods in the ElectricAccount class at line n1 so that the member variable bill is always equal to the value of the member variable kWh multiplied by the member variable rate?

A

```
public void addKWh(double kWh) {
    this.kWh += kWh;
    this.bill = this.kWh*this.rate;
}
```

B

```
public void addKWh(double kWh) {
    if (kWh > 0) {
        this.kWh += kWh;
        this.bill = this.kWh * this.rate;
    }
}
```

C

```
private void addKWh(double kWh) {
    if (kWh > 0) {
        this.kWh += kWh;
        this.bill = this.kWh*this.rate;
    }
}
```

D

```
public void addKWh(double kWh) {
    if(kWh > 0) {
        this.kWh += kWh;
        setBill(this.kWh);
    }
}

public void setBill(double kWh) {
    bill = kWh*rate;
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 10

This grid shows the state of a 2D array:

0	0	
	X	0
X		X

The grid is created with this code:

```
char[][] grid = new char[3][3];
grid[1][1] = 'X';
grid[0][0] = '0';
grid[2][0] = 'X';
grid[0][1] = '0';
grid[2][2] = 'X';
grid[1][2] = '0';
//line n1
```

Which line of code, when inserted in place of //line n1, adds an X into the grid so that the grid contains three consecutive Xs?

- A. grid[2][1] = 'X';
- B. grid[3][2] = 'X';
- C. grid[3][1] = 'X';
- D. grid[2][3] = 'X';

Answer: D

NEW QUESTION 15

Given:

```
public class Fieldinit {
    char c;
    boolean b;
    float f;
    void printAll() {
        System.out.println ("c = " + c);
        System.out.println ("b = " + b);
        System.out.println ("f = " + f);
    }
    public static void main (String [] args) {
        FieldInit f = new FieldInit ();
        f.printAll ();
    }
}
```

What is the result?

- A


```
c=
b = false
f = 0.0
```
- B


```
c= null
b = true
f = 0.0
```
- C


```
c=0
b = false
f = 0.0f
```
- D


```
c= null
b = false
f = 0.0F
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 16

Given:

```
public class Test {
    public static void main(String[] args) {
        boolean a = new Boolean(Boolean.valueOf(args[0]));
        boolean b = new Boolean(args[1]);
        System.out.println(a + " " + b);
    }
}
```

And given the commands:

```
javac Test.java
java Test 1 null
```

What is the result?

- A. 1 null
- B. true false
- C. false false
- D. true true
- E. A ClassCastException is thrown at runtime.

Answer: D

NEW QUESTION 19

Given the code fragment:

```
public class Employee {
    String name;
    boolean contract;
    double salary;
    Employee() {
        // line n1
    }
    public String toString(){
        return name + ":" + contract + ":" + salary;
    }
    public static void main(String[] args) {
        Employee e = new Employee();
        // line n2
        System.out.print(e);
    }
}
```

Which two modifications, when made independently, enable the code to print Joe:true: 100.0? (Choose two.)

- A) Replace line n2 with:
`e.name = "Joe";`
`e.contract = true;`
`e.salary = 100;`
- B) Replace line n2 with:
`this.name = "Joe";`
`this.contract = true;`
`this.salary = 100;`
- C) Replace line n1 with:
`this.name = new String("Joe");`
`this.contract = new Boolean(true);`
`this.salary = new Double(100);`
- D) Replace line n1 with:
`name = "Joe";`
`contract = TRUE;`
`salary = 100.0f;`
- E) Replace line n1 with:
`this("Joe", true, 100);`

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: AC

NEW QUESTION 20

Given:

```
interface Readable {
    public void readBook();
    public void setBookMark();
}

abstract class Book implements Readable { // line n1
    public void readBook() { }
    // line n2
}

class EBook extends Book { // line n3
    public void readBook() { }
    // line n4
}
```

And given the code fragment: `Book book1 = new EBook(); book1.readBook();`
 Which option enables the code to compile?

- A) Replace the code fragment at line n1 with:
`class Book implements Readable {`
- B) At line n2 insert:
`public abstract void setBookMark();`
- C) Replace the code fragment at line n3 with:
`abstract class EBook extends Book {`
- D) At line n4 insert:
`public void setBookMark() { }`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 22

Given:

```
class Product {
    double price;
}

public class Test {
    public void updatePrice(Product product, double price) {
        price = price * 2;
        product.price = product.price + price;
    }
    public static void main(String[] args) {
        Product prt = new Product();
        prt.price = 200;
        double newPrice = 100;

        Test t = new Test();
        t.updatePrice(prt, newPrice);
        System.out.println(prt.price + " : " + newPrice);
    }
}
```

What is the result?

- A. 200.0 : 100.0
- B. 400.0 : 200.0
- C. 400.0 : 100.0
- D. Compilation fails.

Answer: C

NEW QUESTION 25

Given the code fragment:

```
LocalDateTime dt = LocalDateTime.of(2014, 7, 31, 1, 1);
dt.plusDays(30);
dt.plusMonths(1);
System.out.println(dt.format(DateTimeFormatter.ISO_DATE_TIME));
```

What is the result?

- A. An exception is thrown at runtime
- B. 2014-07-31T01:01:00
- C. 2014-07-31
- D. 2014-09-30T00:00:00

Answer: B

NEW QUESTION 30

Given:

```
class A {
    public void test() {
        System.out.println("A ");
    }
}

class B extends A {
    public void test() {
        System.out.println("B ");
    }
}

public class C extends A {
    public void test() {
        System.out.println("C ");
    }
}

public static void main(String[] args) {
    A b1 = new A();
    A b2 = new C();
    A b3 = (B) b2;           //line n1
    b1 = (A) b2;           //line n2
    b1.test();
    b3.test();
}
}
```

What is the result?

- A. AB
- B. AC
- C. CC
- D. A ClassCastException is thrown only at line n1.
- E. A ClassCastException is thrown only at line n2.

Answer: D

NEW QUESTION 32

Given the code fragment:

```
abstract class Toy {
    int price;
    // line n1
}
```

Which three code fragments are valid at line n1?

- A
- ```
public static void insertToy() {
 /* code goes here */
}
```
- B
- ```
final Toy getToy() {
    return new Toy();
}
```
- C
- ```
public void printToy();
```
- D
- ```
public int calculatePrice() {
    return price;
}
```
- E
- ```
public abstract int computeDiscount();
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

**Answer:** CDE

#### NEW QUESTION 35

Which statement is true about Java byte code?

- A. It can run on any platform.
- B. It can run on any platform only if it was compiled for that platform.
- C. It can run on any platform that has the Java Runtime Environment.
- D. It can run on any platform that has a Java compiler.
- E. It can run on any platform only if that platform has both the Java Runtime Environment and a Java compiler.

**Answer:** D

#### Explanation:

Java bytecodes help make "write once, run anywhere" possible. You can compile your program into bytecodes on any platform that has a Java compiler. The bytecodes can then be run on any implementation of the Java VM. That means that as long as a computer has a Java VM, the same program written in the Java programming language can run on Windows 2000, a Solaris workstation, or on an iMac.

#### NEW QUESTION 40

Given the code fragment:

```
abstract class Planet {
 protected void revolve() { //line n1
 }

 abstract void rotate(); //line n2
}

class Earth extends Planet {
 void revolve() { //line n3
 }

 protected void rotate() { //line n4
 }
}
```

Which two modifications, made independently, enable the code to compile? (Choose two.)

- A. Make the method at line n1 public.
- B. Make the method at line n2 public.
- C. Make the method at line n3 public.

- D. Make the method at line n3 protected.
- E. Make the method at line n4 public.

**Answer:** CD

**NEW QUESTION 43**

Given this class:

```
public class CheckingAccount {
 public int amount;
 //line n1
}
```

And given this main method, located in another class:

```
public static void main(String[] args) {
 CheckingAccount acct = new CheckingAccount();
 //line n2
}
```

Which three pieces of code, when inserted independently, set the value of amount to 100?

A

At line n1 insert:

```
public CheckingAccount() {
 amount = 100;
}
```

B

At line n2 insert:

```
this.amount = 100;
```

C

At line n2 insert:

```
amount = 100;
```

D

At line n1 insert:

```
public CheckingAccount() {
 this.amount = 100;
}
```

E

At line n2 insert:

```
acct.amount = 100;
```

F

At line n1 insert:

```
public CheckingAccount() {
 acct.amount = 100;
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

**Answer:** DE

**NEW QUESTION 44**

Given:

Base.java:

```
class Base {
 public void test(){
 System.out.println("Base ");
 }
}
```

DerivedA.java:

```
class DerivedA extends Base {
 public void test(){
 System.out.println("DerivedA ");
 }
}
```

DerivedB.java:

```
class DerivedB extends DerivedA {
 public void test(){
 System.out.println("DerivedB ");
 }
 public static void main(String[] args) {
 Base b1 = new DerivedB();
 Base b2 = new DerivedA();
 Base b3 = new DerivedB();
 Base b4 = b3;
 b1 = (Base) b2;
 b1.test();
 b4.test();
 }
}
```

What is the result?

- A. BaseDerivedA
- B. BaseDerivedB
- C. DerivedBDerivedB
- D. DerivedBDerivedA
- E. A ClassCastException is thrown at runtime.

**Answer:** D

#### NEW QUESTION 49

Given the code fragment:

```
7. StringBuilder sb1 = new StringBuilder("Duke");
8. String str1 = sb1.toString();
9. // insert code here
10. System.out.print(str1 == str2);
```

Which code fragment, when inserted at line 9, enables the code to print true?

- A. String str2 = str1;
- B. String str2 = new String(str1);
- C. String str2 = sb1.toString();
- D. String str2 = "Duke";

**Answer:** A

#### NEW QUESTION 50

Given:

```
class Test {
 int a1;

 public static void doProduct(int a) {
 a = a * a;
 }

 public static void doString(String s) {
 s.concat(" " + s);
 }

 public static void main(String[] args) {
 Test item = new Test();
 item.a1 = 11;
 String sb = "Hello";
 Integer i = 10;
 doProduct(i);
 doString(sb);
 doProduct(item.a1);
 System.out.println(i + " " + sb + " " + item.a1);
 }
}
```

What is the result?

- A. 10 Hello Hello 11
- B. 10 Hello Hello 121
- C. 100 Hello 121
- D. 100 Hello Hello 121
- E. 10 Hello 11

**Answer:** E

#### NEW QUESTION 55

Given the code fragment:

```
public static void main(String[] args) {
 String myStr = "Hello World ";
 myStr.trim();
 int i1 = myStr.indexOf(" ");
 System.out.println(i1);
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. -1
- C. 5
- D. 10

**Answer:** A

#### NEW QUESTION 60

Given the code fragment:

```
int wd = 0;
String days[] = {"sun", "mon", "wed", "sat"};
for (String s:days) {
 switch (s) {
 case "sat":
 case "sun":
 wd -= 1;
 break;
 case "mon":
 wd++;
 case "wed":
 wd += 2;
 }
}
System.out.println(wd);
```

What is the result?

- A. 3
- B. 4
- C. -1
- D. Compilation fails.

**Answer:** A

#### NEW QUESTION 64

Given the code fragment:

```
public static void main(String[] args) {
 StringBuilder sb = new StringBuilder("Java");
 String s = "Java";

 if (sb.toString().equals(s.toString())) {
 System.out.println("Match 1");
 } else if (sb.equals(s)) {
 System.out.println("Match 2");
 } else {
 System.out.println("No Match");
 }
}
```

What is the result?

- A. Match 1
- B. Match 2
- C. No Match
- D. A NullPointerException is thrown at runtime.

**Answer:** A

#### NEW QUESTION 67

Which three are advantages of the Java exception mechanism? (Choose three.)

- A. Improves the program structure because the error handling code is separated from the normal program function
- B. Provides a set of standard exceptions that covers all possible errors
- C. Improves the program structure because the programmer can choose where to handle exceptions
- D. Improves the program structure because exceptions must be handled in the method in which they occurred
- E. Allows the creation of new exceptions that are customized to the particular program being created

**Answer:** ACE

#### NEW QUESTION 68

Which statement is true about the switch statement?

- A. It must contain the default section.
- B. The break statement, at the end of each case block, is optional.
- C. Its case label literals can be changed at runtime.
- D. Its expression must evaluate to a collection of values.

**Answer:** B

#### NEW QUESTION 72

Given:

```
class Caller {
 private void init () {
 System.out.println("Initialized");
 }

 private void start () {
 init();
 System.out.println("Started");
 }
}

public class TestCall {
 public static void main(String[] args) {
 Caller c = new Caller();
 c.start();
 c.init();
 }
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. InitializedStartedInitialized
- C. InitializedStarted
- D. Compilation fails.

**Answer:** D

#### NEW QUESTION 76

Given this segment of code:

```
ArrayList<Cycle> myList = new ArrayList<>();
myList.add(new Motorcycle());
```

Which two statements, if either were true, would make the code compile? (Choose two.)

- A. Motorcycle is an interface that implements the Cycle class.
- B. Cycle is an interface that is implemented by the Motorcycle class.
- C. Cycle is an abstract superclass of Motorcycle.
- D. Cycle and Motorcycle both extend the Transportation superclass.
- E. Cycle and Motorcycle both implement the Transportation interface.
- F. Motorcycle is a superclass of Cycle.

**Answer:** BC

#### NEW QUESTION 78

Which statement best describes encapsulation?

- A. Encapsulation ensures that classes can be designed so that only certain fields and methods of an object are accessible from other objects.
- B. Encapsulation ensures that classes can be designed so that their methods are inheritable.
- C. Encapsulation ensures that classes can be designed with some fields and methods declared as abstract.
- D. Encapsulation ensures that classes can be designed so that if a method has an argument MyType x, any subclass of MyType can be passed to that method.

**Answer:** A

#### NEW QUESTION 79

Which two statements are true? (Choose two.)

- A. Error class is unextendable.
- B. Error class is extendable.
- C. Error is a RuntimeException.
- D. Error is an Exception.
- E. Error is a Throwable.

**Answer:** BC

#### NEW QUESTION 82

Which statement will empty the contents of a StringBuilder variable named sb?

- A. s
- B. deleteAll ();
- C. s
- D. delete (0, s
- E. size () );
- F. s
- G. delete (0, s
- H. length () );
- I. s
- J. removeAll ();

**Answer:** C

#### NEW QUESTION 85

Given the code fragment:

```
int nums1[] = {1, 2, 3};
int nums2[] = {1, 2, 3, 4, 5};
nums 2 = nums 1;
for (int x : nums2){
 System.out.print(x + " ");
}
```

What is the result?

- A. 1:2:3:4:5:
- B. 1:2:3:
- C. Compilation fails.
- D. An ArrayOutOfBoundsException is thrown at runtime.

**Answer:** A

**NEW QUESTION 90**

Which three statements are true about the structure of a Java class? (Choose three.)

- A. A public class must have a main method.
- B. A class can have only one private constructors.
- C. A method can have the same name as a field.
- D. A class can have overloaded static methods.
- E. The methods are mandatory components of a class.
- F. The fields need not be initialized before use.

**Answer:** ACE

**NEW QUESTION 92**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### 1z0-808 Practice Exam Features:

- \* 1z0-808 Questions and Answers Updated Frequently
- \* 1z0-808 Practice Questions Verified by Expert Senior Certified Staff
- \* 1z0-808 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 1z0-808 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 1z0-808 Practice Test Here](#)**