



Fortinet

Exam Questions NSE5_FAZ-7.2

Fortinet NSE 5 - FortiAnalyzer 7.2

NEW QUESTION 1

What FortiView tool can you use to automatically build a dataset and chart based on a filtered search result?

- A. Chart Builder
- B. Export to Report Chart
- C. Dataset Library
- D. Custom View

Answer: B

NEW QUESTION 2

When working with FortiAnalyzer reports, what is the purpose of a dataset?

- A. To provide the layout used for reports
- B. To define the chart type to be used
- C. To retrieve data from the database
- D. To set the data included in templates

Answer: C

NEW QUESTION 3

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with SSL? (Choose two.)

- A. SSL is the default setting.
- B. SSL communications are auto-negotiated between the two devices.
- C. SSL can send logs in real-time only.
- D. SSL encryption levels are globally set on FortiAnalyzer.
- E. FortiAnalyzer encryption level must be equal to, or higher than, FortiGate.

Answer: AD

NEW QUESTION 4

What are two benefits of using fabric connectors? (Choose two.)

- A. They allow FortiAnalyzer to send logs in real-time to public cloud accounts.
- B. You do not need an additional license to send logs to the cloud platform.
- C. Fabric connectors allow you to improve redundancy.
- D. Using fabric connectors is more efficient than using third-party polling with API.

Answer: AC

NEW QUESTION 5

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 6

What must you consider when using log fetching? (Choose two.)

- A. The fetch client can retrieve logs from devices that are not added to its local Device Manager
- B. You can use filters to include only logs from a single device.
- C. The fetching profile must include a user with the Super_User profile.
- D. The archive logs retrieved from the server become archive logs in the client.

Answer: BC

NEW QUESTION 7

What statements are true regarding the "store and upload" log transfer option between FortiAnalyzer and FortiGate? (Choose three.)

- A. All FortiGates can send logs to FortiAnalyzer using the store and upload option.
- B. Only FortiGate models with hard disks can send logs to FortiAnalyzer using the store and upload option.
- C. Both secure communications methods (SSL and IPsec) allow the store and upload option.
- D. Disk logging is enabled on the FortiGate through the CLI only.
- E. Disk logging is enabled by default on the FortiGate.

Answer: BCD

NEW QUESTION 8

FortiAnalyzer centralizes which functions? (Choose three)

- A. Network analysis
- B. Graphical reporting
- C. Content archiving / data mining
- D. Vulnerability assessment
- E. Security log analysis / forensics

Answer: BCE

NEW QUESTION 9

For which two purposes would you use the command set log checksum? (Choose two.)

- A. To help protect against man-in-the-middle attacks during log upload from FortiAnalyzer to an SFTP server
- B. To prevent log modification or tampering
- C. To encrypt log communications
- D. To send an identical set of logs to a second logging server

Answer: AB

Explanation:

To prevent logs from being tampered with while in storage, you can add a log checksum using the config system global command. You can configure FortiAnalyzer to record a log file hash value, timestamp, and authentication code when the log is rolled and archived and when the log is uploaded (if that feature is enabled). This can also help against man-in-the-middle only for the transmission from FortiAnalyzer to an SSH File Transfer Protocol (SFTP) server during log upload.
FortiAnalyzer_7.0_Study_Guide-Online page 149

NEW QUESTION 10

Which log type does the FortiAnalyzer indicators of compromise feature use to identify infected hosts?

- A. Antivirus logs
- B. Web filter logs
- C. IPS logs
- D. Application control logs

Answer: B

NEW QUESTION 10

If a hard disk fails on a FortiAnalyzer that supports software RAID, what should you do to bring the FortiAnalyzer back to functioning normally, without losing data?

- A. Hot swap the disk
- B. Replace the disk and rebuild the RAID manually
- C. Take no action if the RAID level supports a failed disk
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 11

How can you configure FortiAnalyzer to permit administrator logins from only specific locations?

- A. Use static routes
- B. Use administrative profiles
- C. Use trusted hosts
- D. Use secure protocols

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/186508/trusted-hosts>

NEW QUESTION 14

Which two statements are true regarding the outbreak detection service? (Choose two.)

- A. New alerts are received by email.
- B. Outbreak alerts are available on the root ADOM only.
- C. An additional license is required.
- D. It automatically downloads new event handlers and reports.

Answer: CD

NEW QUESTION 16

By default, what happens when a log file reaches its maximum file size?

- A. FortiAnalyzer overwrites the log files.
- B. FortiAnalyzer stops logging.
- C. FortiAnalyzer rolls the active log by renaming the file.
- D. FortiAnalyzer forwards logs to syslog.

Answer: C

NEW QUESTION 19

After generating a report, you notice the information you were expecting to see is not included in it. What are two possible reasons for this scenario? (Choose two.)

- A. You enabled auto-cache with extended log filtering.
- B. The logfiled service has not indexed all the expected logs.
- C. The logs were overwritten by the data retention policy.
- D. The time frame selected in the report is wrong.

Answer: BC

NEW QUESTION 24

Which two methods are the most common methods to control and restrict administrative access on FortiAnalyzer? (Choose two.)

- A. Virtual domains
- B. Administrative access profiles
- C. Trusted hosts
- D. Security Fabric

Answer: BC

NEW QUESTION 25

In the FortiAnalyzer FortiView, source and destination IP addresses from FortiGate devices are not resolving to a hostname.

How can you resolve the source and destination IP addresses, without introducing any additional performance impact to FortiAnalyzer?

- A. Resolve IP addresses on a per-ADOM basis to reduce delay on FortiView while IPs resolve
- B. Configure # set resolve-ip enable in the system FortiView settings
- C. Configure local DNS servers on FortiAnalyzer
- D. Resolve IP addresses on FortiGate

Answer: D

Explanation:

<https://packetplant.com/fortigate-and-fortianalyzer-resolve-source-and-destination-ip/>

“As a best practice, it is recommended to resolve IPs on the FortiGate end. This is because you get both source and destination, and it offloads the work from FortiAnalyzer. On FortiAnalyzer, this IP resolution does destination IPs only”

NEW QUESTION 27

In order for FortiAnalyzer to collect logs from a FortiGate device, what configuration is required? (Choose two.)

- A. Remote logging must be enabled on FortiGate
- B. Log encryption must be enabled
- C. ADOMs must be enabled
- D. FortiGate must be registered with FortiAnalyzer

Answer: AD

Explanation:

Pg 70: “after you add and register a FortiGate device with the FortiAnalyzer unit, you must also ensure that the FortiGate device is configured to send logs to the FortiAnalyzer unit.”

<https://docs.fortinet.com/uploaded/files/4614/FortiAnalyzer-5.4.6-Administration%20Guide.pdf>

Pg 45: “ADOMs must be enabled to support the logging and reporting of NON-FORTIGATE devices, such as FortiCarrier, FortiClientEMS, FortiMail, FortiWeb, FortiCache, and FortiSandbox.”

NEW QUESTION 28

What is Log Insert Lag Time on FortiAnalyzer?

- A. The number of times in the logs where end users experienced slowness while accessing resources.
- B. The amount of lag time that occurs when the administrator is rebuilding the ADOM database.
- C. The amount of time that passes between the time a log was received and when it was indexed on FortiAnalyzer.
- D. The amount of time FortiAnalyzer takes to receive logs from a registered device

Answer: C

NEW QUESTION 33

Which two statement are true regardless initial Logs sync and Log Data Sync for Ha on FortiAnalyzer?

- A. By default, Log Data Sync is disabled on all backup devise.

- B. Log Data Sync provides real-time log synchronization to all backup devices.
- C. With initial Logs Sync, when you add a unit to an HA cluster, the primary device synchronizes its logs with the backup device.
- D. When Logs Data Sync is turned on, the backup device will reboot and then rebuilt the log database with the synchronized logs.

Answer: CD

NEW QUESTION 34

On FortiAnalyzer, what is a wildcard administrator account?

- A. An account that permits access to members of an LDAP group
- B. An account that allows guest access with read-only privileges
- C. An account that requires two-factor authentication
- D. An account that validates against any user account on a FortiAuthenticator


Answer: A

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/747268/configuring-wildcard-admin-accounts>

NEW QUESTION 35

Refer to the exhibit.

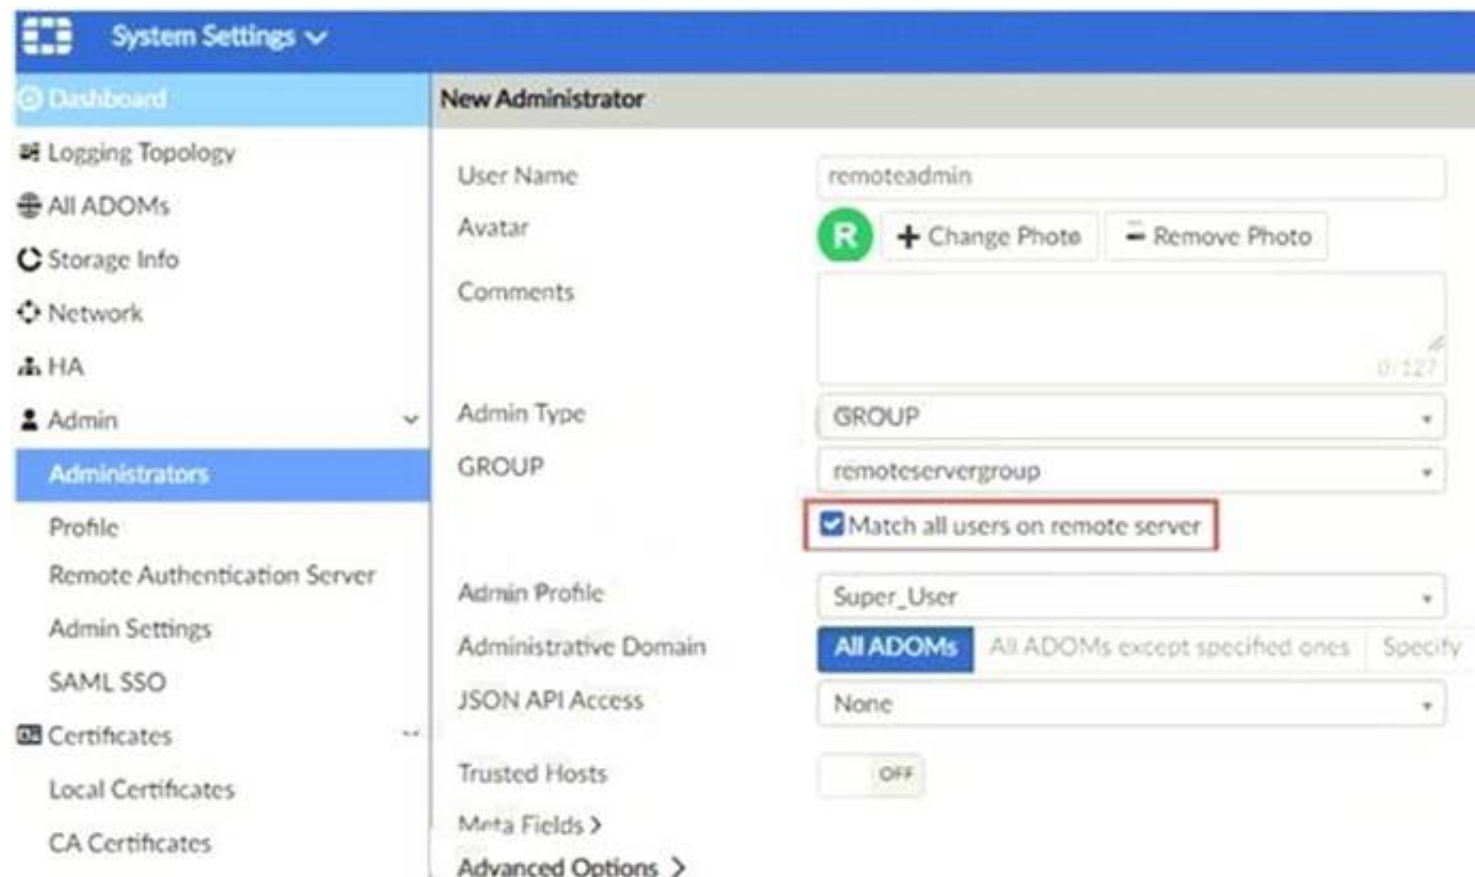

The exhibit shows “remoteservergroup” is an authentication server group with LDAP and RADIUS servers. Which two statements express the significance of enabling “Match all users on remote server” when configuring a new administrator? (Choose two.)

- A. It creates a wildcard administrator using LDAP and RADIUS servers.
- B. Administrator can log in to FortiAnalyzer using their credentials on remote servers LDAP and RADIUS.
- C. Use remoteadmin from LDAP and RADIUS servers will be able to log in to FortiAnalyzer at anytime.
- D. It allows administrators to use two-factor authentication.

Answer: AB

NEW QUESTION 38

Which two statements are true regarding high availability (HA) on FortiAnalyzer? (Choose two.)

- A. FortiAnalyzer HA can function without VRR
- B. and VRRP is required only if you have more than two FortiAnalyzer devices in a cluster.
- C. FortiAnalyzer HA supports synchronization of logs as well as some system and configuration settings.
- D. All devices in a FortiAnalyzer HA cluster must run in the same operation mode: analyzer or collector.
- E. FortiAnalyzer HA implementation is supported by many public cloud infrastructures such as AWS, Microsoft Azure, and Google Cloud.

Answer: BC

NEW QUESTION 42

What remote authentication servers can you configure to validate your FortiAnalyzer administrator logons? (Choose three)

- A. RADIUS
- B. Local
- C. LDAP
- D. PKI
- E. TACACS+

Answer: ACE

NEW QUESTION 44

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

Answer: D

NEW QUESTION 45

How can you attach a report to an incident?

- A. By attaching it to an event handler alert
- B. By editing the settings of the desired report
- C. From the properties of an existing incident
- D. Saving it in JSON format, and then importing it

Answer: C

NEW QUESTION 46

Why run the command `diagnose sql status sqlplugind`?

- A. To list the current SQL processes running
- B. To check what is the database log insertion status
- C. To display the SOL query connections and hcache status
- D. To view the current hcache size

Answer: C

NEW QUESTION 49

Which statement is true about sending notifications with incident updates?

- A. Notifications can be sent only when an incident is updated or deleted.
- B. If you use multiple fabric connectors, all connectors must have the same notification settings
- C. Notifications can be sent only by email.
- D. You can send notifications to multiple external platforms

Answer: D

Explanation:

You can add more than one fabric connector, each with the same or different notification settings. The receiving side of the connector must be configured for the notifications to be sent successfully.

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 34: Fabric connectors also enable FortiAnalyzer to send notifications to ITSM platforms when a new incident is created or for any subsequent updates.

NEW QUESTION 53

Which statement is true regarding Macros on FortiAnalyzer?

- A. Macros are ADOM specific and each ADOM will have unique macros relevant to that ADOM.
- B. Macros are supported only on the FortiGate ADOM.
- C. Macros are useful in generating excel log files automatically based on the reports settings.
- D. Macros are predefined templates for reports and cannot be customized.

Answer: A

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 283: Note that macros are ADOM-specific and supported in FortiGate and FortiCarrier ADOMs only.

NEW QUESTION 56

What happens when the IOC breach detection engine on FortiAnalyzer finds web logs that match a blocklisted IP address?

- A. The endpoint is marked as Compromised and
- B. optionally, can be put in quarantine.
- C. FortiAnalyzer flags the associated host for further analysis.
- D. A new Infected entry is added for the corresponding endpoint.
- E. The detection engine classifies those logs as Suspicious

Answer: A

NEW QUESTION 58

What are the operating modes of FortiAnalyzer? (Choose two)


- A. Standalone

- B. Manager
- C. Analyzer
- D. Collector

Answer: CD

NEW QUESTION 63

Refer to the exhibit.

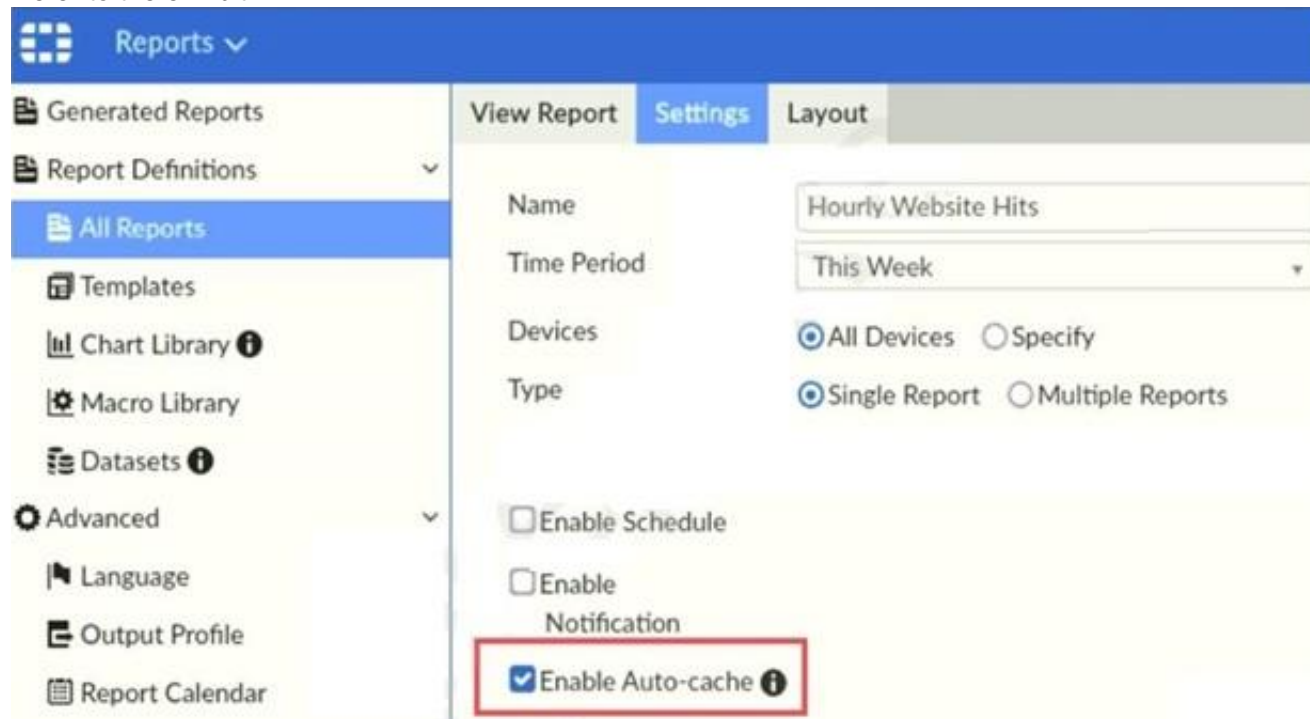

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

Explanation:

"Enable auto-cache in the report settings to boost the reporting performance and reduce report generation time. Scheduled reports have auto-cache enabled already."

FortiAnalyzer_7.0_Study_Guide-Online page 306

NEW QUESTION 68

Which daemon is responsible for enforcing raw log file size?


- A. logfiled
- B. oftpd
- C. sqlplugind
- D. miglogd

Answer: A

NEW QUESTION 70

View the exhibit.

Insert Rate vs Receive Rate - Last 1 hour

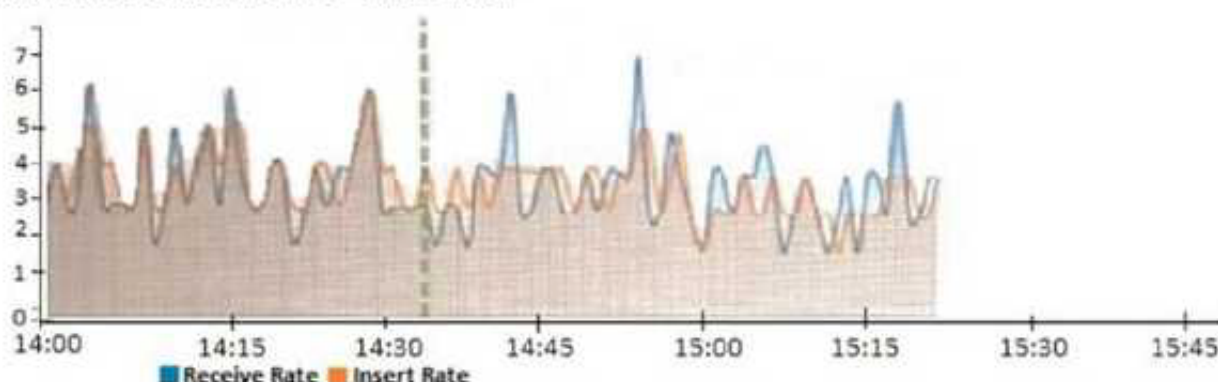

What does the data point at 14:35 tell you?

- A. FortiAnalyzer is dropping logs.
- B. FortiAnalyzer is indexing logs faster than logs are being received.
- C. FortiAnalyzer has temporarily stopped receiving logs so older logs' can be indexed.
- D. The sqlplugind daemon is ahead in indexing by one log.

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/47690/insert-rate-vs-receive-rate-wi>

NEW QUESTION 72

You are using RAID with a FortiAnalyzer that supports software RAID, and one of the hard disks on FortiAnalyzer has failed. What is the recommended method to replace the disk?

- A. Shut down FortiAnalyzer and then replace the disk
- B. Downgrade your RAID level, replace the disk, and then upgrade your RAID level
- C. Clear all RAID alarms and replace the disk while FortiAnalyzer is still running
- D. Perform a hot swap

Answer: A

Explanation:

supports hot swapping on hardware RAID only, so it is recommended that on FortiAnalyzer devices with software RAID you should shutdown FortiAnalyzer prior to exchanging the hard disk.

<https://community.fortinet.com/t5/FortiAnalyzer/Technical-Note-How-to-swap-Hard-Disk-on-FortiAnalyzer/ta->

NEW QUESTION 76


What is the main purpose of using an NTP server on FortiAnalyzer and all of its registered devices?

- A. Log correlation
- B. Host name resolution
- C. Log collection
- D. Real-time forwarding

Answer: A

NEW QUESTION 81

Refer to the exhibit.

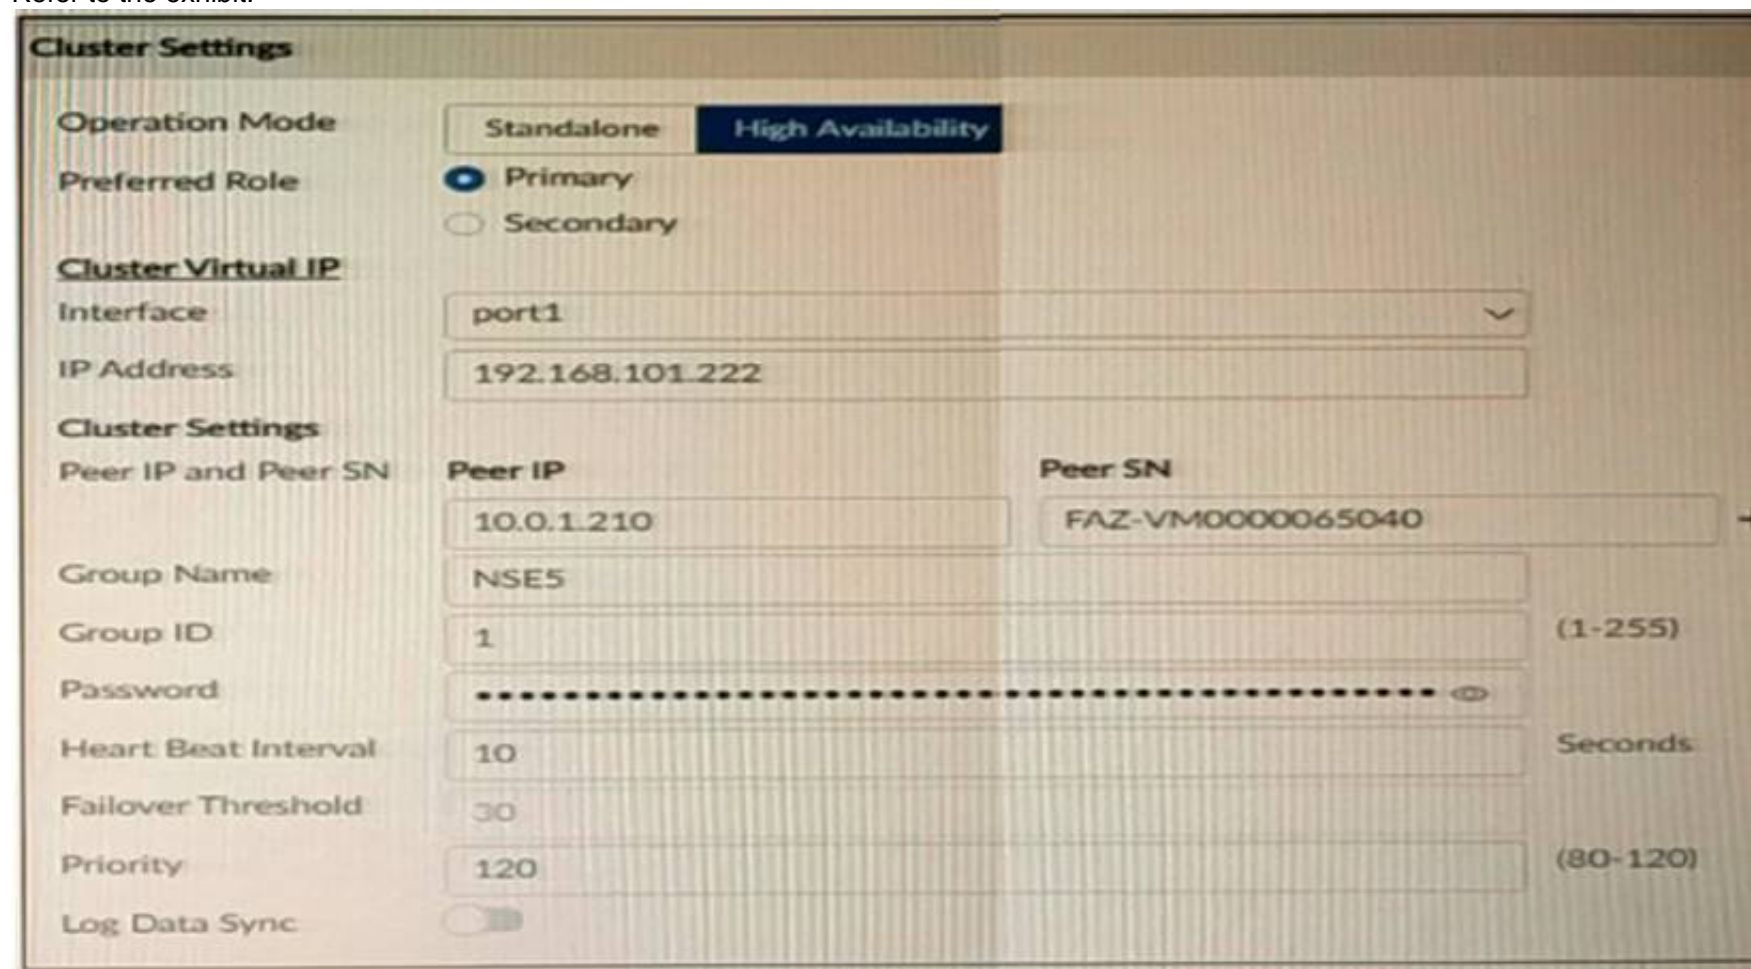

The image displays the configuration of a FortiAnalyzer the administrator wants to join to an existing HA cluster. What can you conclude from the configuration displayed?

- A. This FortiAnalyzer will join to the existing HA cluster as the primary.
- B. This FortiAnalyzer is configured to receive logs in its port1.
- C. This FortiAnalyzer will trigger a failover after losing communication with its peers for 10 seconds.
- D. After joining to the cluster, this FortiAnalyzer will keep an updated log database.

Answer: B

Explanation:

"If the preferred role is Primary, then this unit becomes the primary unit if it is configured first in a new HA cluster. If there is an existing primary unit, then this unit becomes a secondary unit." (<https://docs.fortinet.com/document/fortianalyzer/7.0.5/administration-guide/275104>)

NEW QUESTION 86

Which two statements are true regarding fabric connectors? (Choose two.)

- A. Configuring fabric connectors to send notification to ITSM platform upon incident creation is more efficient than third-party information from the FortiAnalyzer API.
- B. Fabric connectors allow to save storage costs and improve redundancy.
- C. Storage connector service does not require a separate license to send logs to cloud platform.
- D. Cloud-Out connections allow you to send real-time logs to public cloud accounts like Amazon S3, Azure Blob, and Google Cloud.

Answer: AD

NEW QUESTION 90

View the exhibit.



```
Total Quota Summary:
  Total Quota  Allocated  Available  Allocate%
    63.7GB      12.7GB     51.0GB      19.9%

System Storage Summary:
  Total    Used    Available    Use%
  78.7GB   2.9GB    75.9GB     3.6%

Reserved space: 15.0GB (19.0% of total space).
```

Why is the total quota less than the total system storage?

- A. 3.6% of the system storage is already being used.
- B. Some space is reserved for system use, such as storage of compression files, upload files, and temporary report files
- C. The oftpd process has not archived the logs yet
- D. The logfiled process is just estimating the total quota

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/368682/disk-space-allocation>

NEW QUESTION 95

Which statement about the FortiSIEM management extension is correct?

- A. Allows you to manage the entire life cycle of a threat or breach.
- B. Its use of the available disk space is capped at 50%.
- C. It requires a licensed FortiSIEM supervisor.
- D. It can be installed as a dedicated VM.

Answer: A

NEW QUESTION 97

Refer to the exhibit.

FortiAnalyzer1# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065040 BIOS version : 04000002 Hostname : FortiAnalyzer1 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 43.60GB, Total 58.80GB File System : Ext4 License Status : Valid FortiAnalyzer1# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer2 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 1 oftp-ssl-protocol : tls1.2 ssl-low-encryption : disable ssl-protocol : tls1.3 tls1.2 : 2000 : tls1.3 tls1.2	FortiAnalyzer3# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065042 BIOS version : 04000002 Hostname : FortiAnalyzer3 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 12.98GB, Total 79.80GB File System : Ext4 License Status : Valid FortiAnalyzer3# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer3 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 5 oftp-ssl-protocol : tls1.2 ssl-low-encryption : disable ssl-protocol : tls1.3 tls1.2 task-list-size : 2000 web-service-proto : tls1.3 tls1.2
---	--

Based on the partial outputs displayed, which devices can be members of a FortiAnalyzer Fabric?

- A. FortiAnalyzer1 and FortiAnalyzer3
- B. FortiAnalyzer1 and FortiAnalyzer2
- C. All devices listed can be members
- D. FortiAnalyzer2 and FortiAnalyzer3

Answer: C

NEW QUESTION 98

Which two elements are contained in a system backup created on FortiAnalyzer? (Choose two.)

- A. System information
- B. Logs from registered devices
- C. Report information
- D. Database snapshot

Answer: AC

Explanation:

What does the System Configuration backup include?

System information, such as the device IP address and administrative user information. Device list, such as any devices you configured to allow log access.

Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

FortiAnalyzer_7.0_Study_Guide-Online pag. 29

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 29: What does the System Configuration backup include?

- System information, such as the device IP address and administrative user information
- Device list, such as any devices you configured to allow log access
- Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

NEW QUESTION 99

You created a playbook on FortiAnalyzer that uses a FortiOS connector

When configuring the FortiGate side, which type of trigger must be used so that the actions in an automation stitch are available in the FortiOS connector?

- A. FortiAnalyzer Event Handler
- B. Incoming webhook
- C. FortiOS Event Log
- D. Fabric Connector event

Answer: B

Explanation:

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 112

What does the disk status Degraded mean for RAID management?

- A. One or more drives are missing from the FortiAnalyzer uni
- B. The drive is no longer available to the operating system.
- C. The FortiAnalyzer device is writing to all the hard drives on the device in order to make the array fault tolerant.
- D. The FortiAnalyzer device is writing data to a newly added hard drive in order to restore the hard drive to an optimal state.
- E. The hard drive is no longer being used by the RAID controller

Answer: D

NEW QUESTION 117

Which two statements are correct regarding the export and import of playbooks? (Choose two.)

- A. You can export only one playbook at a time.
- B. You can import a playbook even if there is another one with the same name in the destination.
- C. Playbooks can be exported and imported only within the same FortiAnalyzer.
- D. A playbook that was disabled when it was exported, will be disabled when it is imported.

Answer: BD

Explanation:

If the imported playbook has the same name as an existing one, FortiAnalyzer will create a new name that includes a timestamp to avoid conflicts. Playbooks are imported with the same status they had (enabled or disabled) when they were exported. Playbooks set to run automatically should be exported while they are disabled to avoid unintended runs on the destination.

NEW QUESTION 119

Refer to the exhibit.




What does the data point at 12:20 indicate?

- A. The performance of FortiAnalyzer is below the baseline.
- B. FortiAnalyzer is using its cache to avoid dropping logs.
- C. The log insert lag time is increasing.
- D. The sqlplugind service is caught up with new logs.

Answer: C

NEW QUESTION 121

Refer to the exhibit.

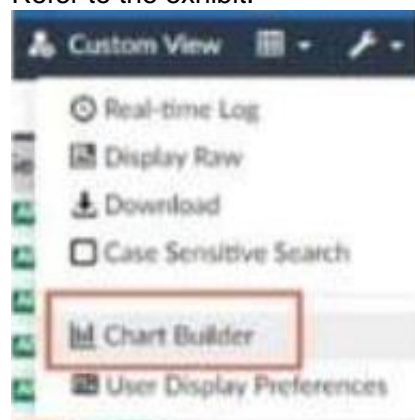

What is the purpose of using the Chart Builder feature on FortiAnalyzer?

- A. In Log View, this feature allows you to build a dataset and chart automatically, based on the filtered search results.
- B. In Log View, this feature allows you to build a chart and chart automatically, on the top 100 log entries.
- C. This feature allows you to build a chart under FortiView.
- D. You can add charts to generated reports using this feature.

Answer: A

NEW QUESTION 125

What is required to authorize a FortiGate on FortiAnalyzer using Fabric authorization?

- A. A FortiGate ADOM
- B. The FortiGate serial number
- C. A pre-shared key
- D. Valid FortiAnalyzer credentials

Answer: D

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 93: The fourth method uses the Fortinet Security Fabric authorization process. This method requires that both FortiGate and FortiAnalyzer are running version 7.0.1 or higher. It is also required that the FortiGate administrator has valid credentials to log in on FortiAnalyzer and complete the registration.

<https://docs.fortinet.com/document/fortianalyzer/7.2.1/administration-guide/13897/adding-a-fortigate-using-secu>

NEW QUESTION 127

FortiAnalyzer reports are dropping analytical data from 15 days ago, even though the data policy setting for analytics logs is 60 days. What is the most likely problem?

- A. Quota enforcement is acting on analytical data before a report is complete
- B. Logs are rolling before the report is run
- C. CPU resources are too high
- D. Disk utilization for archive logs is set for 15 days

Answer: B

NEW QUESTION 130

In FortiAnalyzer's FormView, source and destination IP addresses from FortiGate devices are not resolving to a hostname. How can you resolve the source and destination IPs, without introducing any additional performance impact to FortiAnalyzer?

- A. Configure local DNS servers on FortiAnalyzer
- B. Resolve IPs on FortiGate
- C. Configure # set resolve-ip enable in the system FortiView settings
- D. Resolve IPs on a per-ADOM basis to reduce delay on FortiView while IPs resolve

Answer: B

NEW QUESTION 131


If you upgrade your FortiAnalyzer firmware, what report elements can be affected?

- A. Output profiles
- B. Report settings
- C. Report scheduling
- D. Custom datasets

Answer: D

NEW QUESTION 134

Refer to the exhibit.

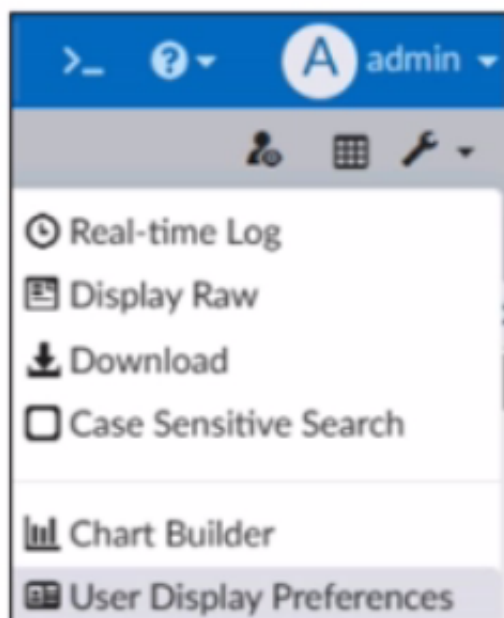

What is the purpose of using the Chart Builder feature on FortiAnalyzer?

- A. To add a new chart under FortiView to be used in new reports
- B. To build a dataset and chart automatically, based on the filtered search results
- C. To add charts directly to generate reports in the current ADOM
- D. To build a chart automatically based on the top 100 log entries

Answer: B

NEW QUESTION 136

What is the purpose of the following CLI command?

```
# configure system global
  set log-checksum md5
end
```

- A. To add a log file checksum
- B. To add the MD's hash value and authentication code
- C. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- D. To encrypt log communications

Answer: A

Explanation:

<https://docs2.fortinet.com/document/fortianalyzer/6.0.3/cli-reference/849211/global>

NEW QUESTION 139

Which FortiAnalyzer feature allows you to use a proactive approach when managing your network security?

- A. Incidents dashboards
- B. Threat hunting
- C. FortiView Monitor
- D. Outbreak alert services

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 217: Threat hunting consists in proactively searching for suspicious or potentially risky network activity in your environment. The proactive approach will help administrator find any threats that might have eluded detection by the current security solutions or configurations.

NEW QUESTION 142

View the exhibit:

Data Policy

Keep Logs for Analytics	60	Days
Keep Logs for Archive	365	Days
Disk Utilization		
Maximum Allowed	1000	MB
Analytics: Archive	70%	30%
Alert and Delete When Usage Reaches	90%	

Out of Available: 62.8 GB

☐ Modify

What does the 1000MB maximum for disk utilization refer to?

- A. The disk quota for the FortiAnalyzer model
- B. The disk quota for all devices in the ADOM
- C. The disk quota for each device in the ADOM
- D. The disk quota for the ADOM type

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/743670/configuring-log-storage-pol>

NEW QUESTION 143

In Log View, you can use the Chart Builder feature to build a dataset and chart based on the filtered search results. Similarly, which feature you can use for FortiView?

- A. Export to Report Chart
- B. Export to PDF
- C. Export to Chart Builder
- D. Export to Custom Chart

Answer: A

NEW QUESTION 148

Why must you wait for several minutes before you run a playbook that you just created?

- A. FortiAnalyzer needs that time to parse the new playbook.
- B. FortiAnalyzer needs that time to back up the current playbooks.
- C. FortiAnalyzer needs that time to ensure there are no other playbooks running.
- D. FortiAnalyzer needs that time to debug the new playbook.

Answer: A

NEW QUESTION 149

If the primary FortiAnalyzer in an HA cluster fails, how is the new primary elected?

- A. The configured IP address is checked first.
- B. The active port number is checked first.
- C. The firmware version is checked first.
- D. The configured priority is checked first

Answer: D

Explanation:

In the case of a primary device failure, FortiAnalyzer HA uses the following rules to select a new primary:

- All cluster devices are assigned a priority from 80 to 120. The default priority is 100. If the primary device becomes unavailable, the device with the highest priority is selected as the new primary device. For example, a device with a priority of 110 is selected over a device with a priority of 100.
- If multiple devices have the same priority, the device whose primary IP address has the greatest value is selected as the new primary device. For example, 123.45.67.124 is selected over 123.45.67.123.
- If a new device with a higher priority or a greater value IP address joins the cluster, the new device does not replace (or pre-empt) the current primary device automatically.

FortiAnalyzer_7.0_Study_Guide-Online page 62

NEW QUESTION 150

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

NSE5_FAZ-7.2 Practice Exam Features:

- * NSE5_FAZ-7.2 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE5_FAZ-7.2 Practice Test Here](#)